

## Data sheet

Page 1/6


**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 plug straight - M12 plug straight,  
unshielded, 4-pole, PVC**

P/N  
**142MIA11010**  
EAN **4251394647579**  
2025/06/16  
Version: I


### Illustrations



Dimensional drawing

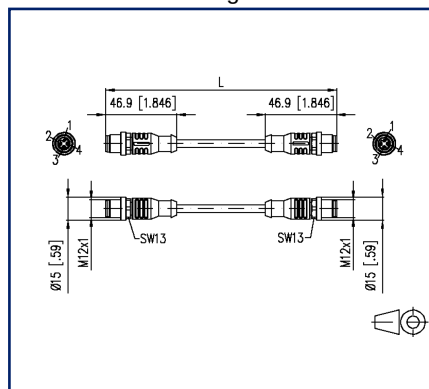

Wiring diagram

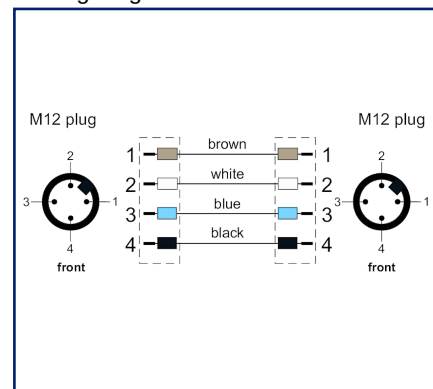

See enlarged drawings at the end of document

### Product specification

PVC-cable for measurement, control and sensor technology. Suitable for applications in dry areas on packaging machines, assembly and conveyor technology. High flexibility with unstressed movement (conditional drag chain application possible). Predestined for applications in food and beverage industry. Special features: seawater resistant, recyclable, LABS free, RoHs compliant, acid and alkali resistant, ozone resistant, UV resistant.

- Standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m.
- Other cable lengths on request.



## Data sheet

Page 2/6

# M12 Sensor/actuator cable, A-coded, 1.0 m, M12 plug straight - M12 plug straight, unshielded, 4-pole, PVC

P/N

142MIA11010

EAN 4251394647579

2025/06/16

Version: I

## Technical Data

| General Data                                  |                                              |
|-----------------------------------------------|----------------------------------------------|
| Fields of application                         | Industrial Ethernet                          |
| Design                                        | Sensor/actuator connection line M12, A-coded |
| Shielding                                     | unshielded                                   |
| Transmission technology                       | Copper                                       |
| Color coding fiber/ wire(s)                   | brown, white, blue, black                    |
| Color                                         | gray                                         |
| Dimensions                                    |                                              |
| Dimension - Interface 1 (L x W x H)           | 46.9 mm x 15 mm x 15 mm                      |
| Dimension - Interface 1 (L x W x H)           | 1.846 in. x 0.591 in. x 0.591 in.            |
| Dimension - Interface 2 (L x W x H)           | 46.9 mm x 15 mm x 15 mm                      |
| Dimension - Interface 2 (L x W x H)           | 1.846 in. x 0.591 in. x 0.591 in.            |
| Cable length (m)                              | 1 m                                          |
| Cable length (ft)                             | 3.28 ft                                      |
| Labeling option                               | identification label carrier                 |
| Connections/interfaces                        |                                              |
| Connector technology interface 1              | M12-plug                                     |
| Connector technology interface 2              | M12-plug                                     |
| Coding interface 1                            | A-coded                                      |
| Coding interface 2                            | A-coded                                      |
| Number of positions/contacts interface 1      | 4                                            |
| Number of positions/contacts interface 2      | 4                                            |
| Termination data, stranded wire (min. - max.) |                                              |
| Conductor cross section, stranded wire        | AWG 22/19                                    |
| Conductor cross section, stranded wire        | 0.34 mm <sup>2</sup>                         |
| Stranded wire structure                       | 19x0.15mm                                    |
| Cable sheath diameter (min. - max.)           |                                              |
| Cable sheath diameter                         | 4.5 mm                                       |
| Cable sheath diameter                         | 0.177 in.                                    |



## Data sheet

Page 3/6

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 plug straight - M12 plug straight,  
unshielded, 4-pole, PVC**

P/N

142MIA11010

EAN 4251394647579

2025/06/16

Version: I

## Technical Data

## Electrical characteristics

|                           |               |
|---------------------------|---------------|
| Current carrying capacity | 4 A at 40 °C  |
| Rated voltage             | 60 V DC       |
| Insulation resistance     | min. 100 MOhm |

## Mechanical data

|                                  |          |
|----------------------------------|----------|
| Life - Number of mating cycles   | min. 100 |
| Maximum operating bending radius | 45 mm    |
| Alternating bending radius       | 45 mm    |

## Materials and material properties

|                                         |                |
|-----------------------------------------|----------------|
| Material - Conductor                    | Cu (copper)    |
| Material - Conductor Insulation         | PVC            |
| Material - Cable jacket                 | PVC            |
| Material - Body interface 1             | Plastics       |
| Material - Body interface 2             | Plastics       |
| Material - Contact interface 1          | CuSn           |
| Material - Contact interface 2          | CuSn           |
| Material - Contact finish interface 1   | Au (gold)      |
| Material - Contact finish interface 2   | Au (gold)      |
| Material - Contact carriers interface 1 | Plastics       |
| Material - Contact carriers interface 2 | Plastics       |
| Material - Union nut interface 1        | CuZnPb (brass) |
| Material - Union nut interface 2        | CuZnPb (brass) |
| Material - Union nut finish interface 1 | Ni (nickel)    |
| Material - Union nut finish interface 2 | Ni (nickel)    |
| UV-resistance                           | yes            |
| RoHS                                    | compliant      |



## Data sheet

Page 4/6

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 plug straight - M12 plug straight,  
unshielded, 4-pole, PVC**

P/N

142MIA11010

EAN 4251394647579

2025/06/16

Version: I

## Technical Data

### Environmental conditions

Temperature (min. - max.)

|                                      |                                  |
|--------------------------------------|----------------------------------|
| Temperature - Operating °C           | -25 °C - 80 °C                   |
| Temperature - Operating °F           | -13 °F - 176 °F                  |
| Temperature - Installation °C        | 0 °C - 80 °C                     |
| Temperature - Installation °F        | 32 °F - 176 °F                   |
| Particulate ingress interface 1      | IP6X when plugged in             |
| Liquid ingress/immersion interface 1 | IPX5, IPX7, IPX8 when plugged in |
| Particulate ingress interface 2      | IP6X when plugged in             |
| Liquid ingress/immersion interface 2 | IPX5, IPX7, IPX8 when plugged in |
| Pollution degree interface 1         | 3                                |
| Pollution degree interface 2         | 3                                |

### Approvals

UL listed (file no.) Approval pending

### Standards/Regulations

Connectors for electronic equipment

|                    |                    |
|--------------------|--------------------|
| circular connector | DIN EN 61076-2-101 |
|--------------------|--------------------|

### Classifications

|          |          |
|----------|----------|
| ETIM 7.0 | EC001855 |
| ETIM 8.0 | EC001855 |
| ETIM 9.0 | EC001855 |

### Packing details

Type of packaging 1 pc(s) / plastic bag

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



## Data sheet

Page 5/6

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 plug straight - M12 plug straight,  
unshielded, 4-pole, PVC**

P/N

142MIA11010


EAN 4251394647579

2025/06/16


Version: I

## Illustrations

### Dimensional drawing

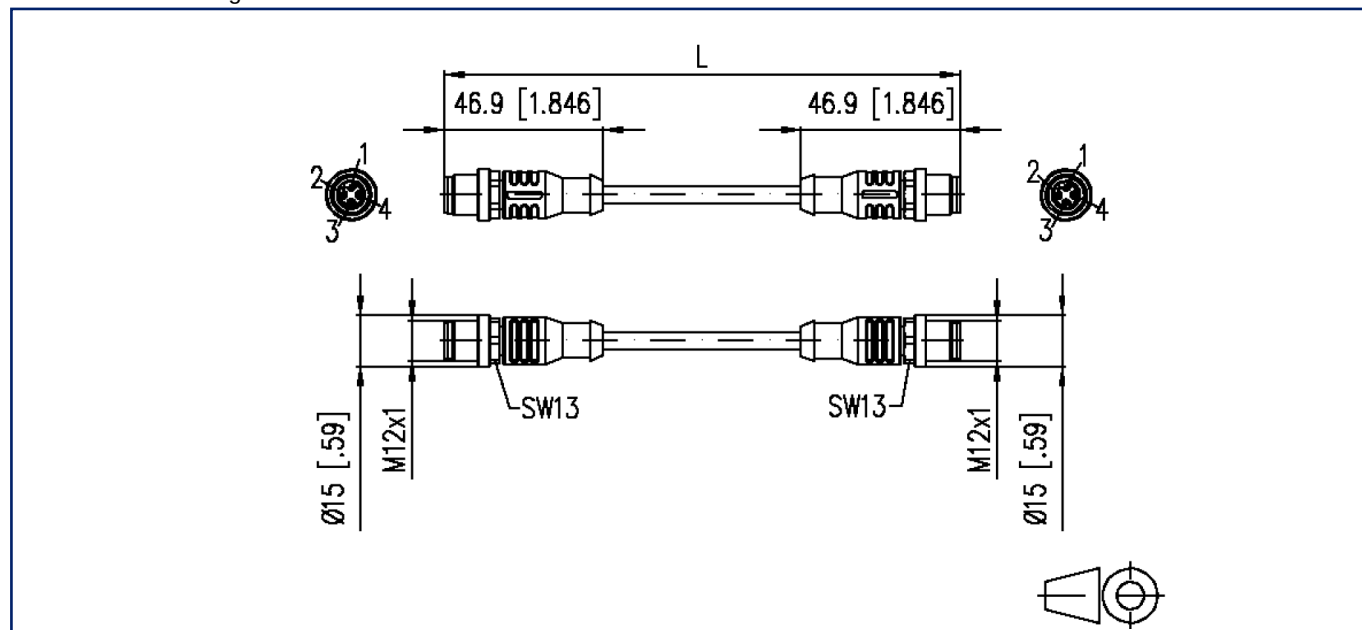

### Wiring diagram

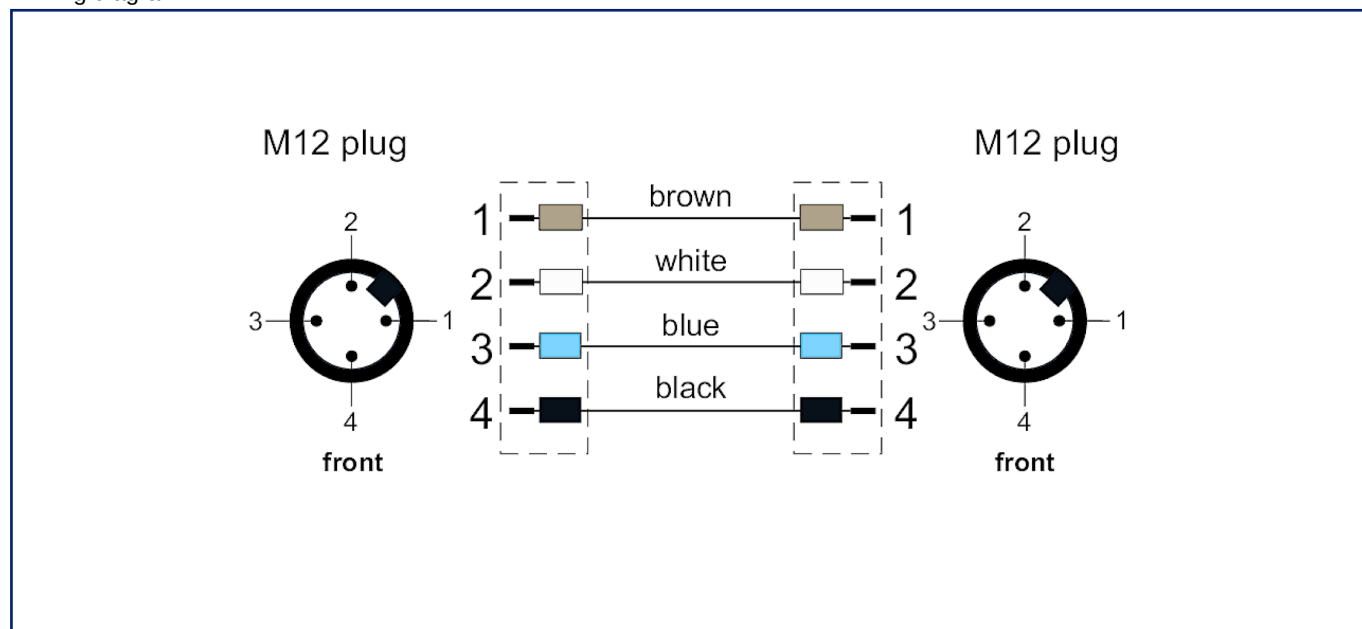

## Data sheet

Page 6/6

**M12 Sensor/actuator cable, A-coded, 1.0 m,  
M12 plug straight - M12 plug straight,  
unshielded, 4-pole, PVC**

P/N

142MIA11010

EAN 4251394647579

2025/06/16

Version: I

**Illustrations**

Principle diagram

