

Data sheet

RP035xxIBLN Type 013

Page 1/6

P/N
310131xx

xx=number of poles


2025/08/21

Version: X

Illustrations



Dimensional drawing as an example

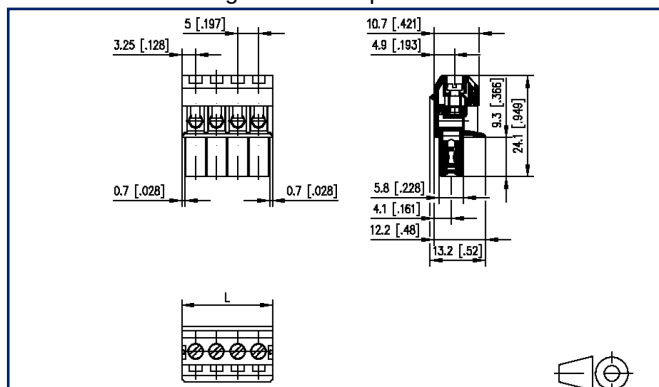

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 5.00 mm, direction of connection 90°
- lift system
- color black
- wire entry uncodeable side perpendicular to plug direction, lamella



Data sheet

RP035xxIBLN Type 013

Page 2/6

P/N
310131xx

xx=number of poles

2025/08/21

Version: X

Technical Data

General Data

Tightening torque SEV	0.5 Nm		
Tightening torque UL	4.4 lb-in		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	3.4 mm		
Protection category	IP20		
Insul. strip length	7 mm		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	4 kV	4 kV	4 kV

Terminal data

rat.wiring solid AWGmax	0.33 mm ² - 2.5 mm ² / AWG 22 - AWG 12
rat.wiring strand.AWGmax	0.33 mm ² - 2.5 mm ² / AWG 22 - AWG 12

Approvals

 V / A / AWG	300 / 15 / 22 - 12
approval UL - File No.	E121004
	320 V / 4 kV / 13.5 A

Material

insulating material	PA66
flammability class	V0
contact material	CuBe
Contact surface	Ni + Ag
terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni
screw thread	M3
screw material	8,8

Data sheet

RP035xxIBLN Type 013

Page 3/6

P/N
310131xx

xx=number of poles

2025/08/21

Version: X

Technical Data

screw surface	Zn Cr(VI)-frei/free
wire protector material	CuNiZn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
-----------	--------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 4/6

RP035xxIBLN Type 013

P/N

310131xx

xx=number of poles

2025/08/21

Version: X

Accessories

P/N	Designation
360176	360176



Data sheet

Page 5/6

RP035xxIBLN Type 013

P/N

310131xx**xx=number of poles**

2025/08/21

Version: X

Counterpart

P/N	Designation
310191	PT045xxVBEC Type 019
310201	PT045xxVBBN Type 020
310291	PT045xxHBEC Type 029
310301	PT045xxHBBN Type 030
310311	PT045xxHBVC Typ 031
310321	PT045xxHBVN Typ 032



Data sheet

RP035xxIBLN Type 013

Page 6/6

P/N

310131xx


xx=number of poles

2025/08/21

Version: X

Illustrations

Dimensional drawing as an example

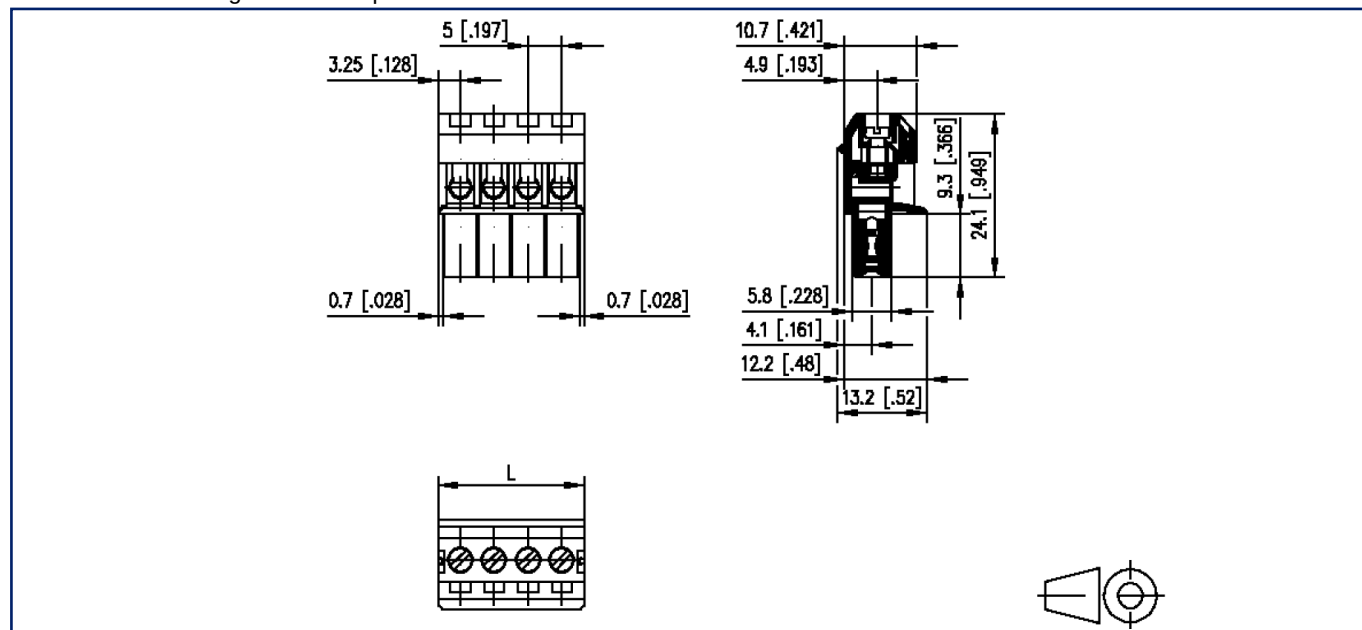

$L = (\text{pole size} - 1) \times \text{centerline} + 6.5 \text{ mm} [0.256]$