

Data sheet

Coding pin long for type 007

Page 1/4

P/N
710122-2


2023/06/23

Version: O

Illustrations



Dimensional drawing

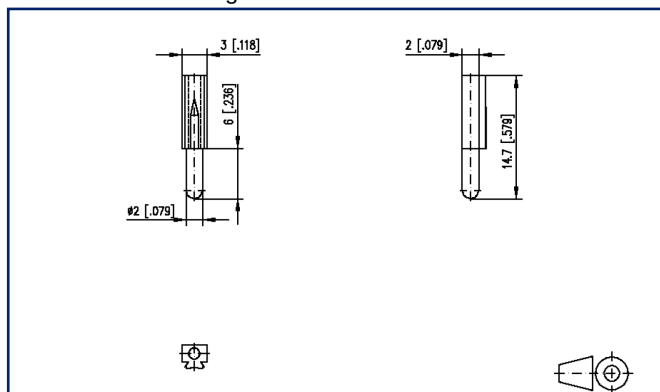

See enlarged drawings at the end of document

Product specification

- The coding pin is inserted into the groove in the back of the terminal block
- This method of coding does not result in any circuit loss
- Variants: 710121-2 short, 710122-2 long



U | Contact

Data sheet

Page 2/4

Coding pin long for type 007

P/N

710122-2

2023/06/23

Version: O

Technical Data

Material

insulating material	PA66
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13



U | Contact

Data sheet

Page 3/4

Coding pin long for type 007

P/N

710122-2

2023/06/23

Version: O

Accessories from

P/N	Designation
310071	RP025xxIBWC Type 007
310072	RP029xxIBWC Type 007
310771	RP025xxIBWU Typ 077
310772	RP029xxIBWU Typ 077
310791	RP026xxIBWU Type 079
310792	RP02AxxIBWU Typ 079
311071	RP025xxHBWC Type 107
311072	RP029xxHBWC Typ 107
311081	RP025xxMBWC Typ 108
311082	RP029xxMBWC Typ 108



U | Contact

Data sheet

Coding pin long for type 007

Page 4/4

P/N
710122-2

2023/06/23

Version: O

Illustrations

Dimensional drawing

