

U | Contact

Data sheet

Coding pin short for type 166

Page 1/4

P/N
720159-01-2


2023/06/23

Version: P

Illustrations



Dimensional drawing

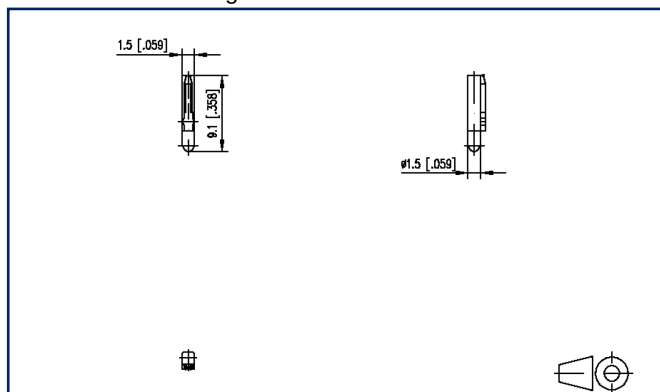

See enlarged drawings at the end of document

Product specification

- The coding pin is inserted into the groove in the back of the terminal block
- This method of coding does not result in any circuit loss
- Variants: 720159-01-2 short, 720159-02-2 long



U | Contact

Data sheet

Page 2/4

Coding pin short for type 166

P/N
720159-01-2

2023/06/23

Version: P

Technical Data

Material

insulating material	PA66
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13



U | Contact

Data sheet

Page 3/4

Coding pin short for type 166

P/N
720159-01-2

2023/06/23

Version: P

Accessories from

P/N	Designation
311651	RP023xxHBNF Type 165
311652	RP02JxxHBNF Typ 165
311661	RP023xxHBWC Type 166
311662	RP02JxxHBWC Typ 166
312071	RP025xxHBLC Type 207
312072	RP029xxHBLC Typ 207
312081	RP025xxMBLC Typ 208
312082	RP029xxMBLC Typ 208

U | Contact

Data sheet

Coding pin short for type 166

Page 4/4

P/N
720159-01-2

2023/06/23

Version: P

Illustrations

Dimensional drawing

