


# Data sheet

## OpDAT outdoor cable 1x4 OS2 class F<sub>ca</sub>


Page 1/4

P/N  
150A00490120M  
EAN 4251394653808  
2025/06/17  
Version: J

### Illustrations

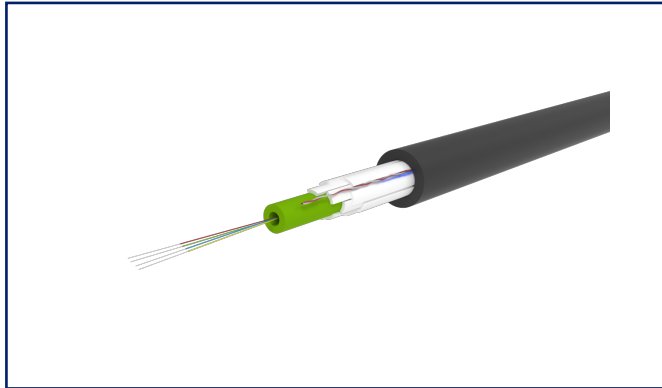

Principle diagram

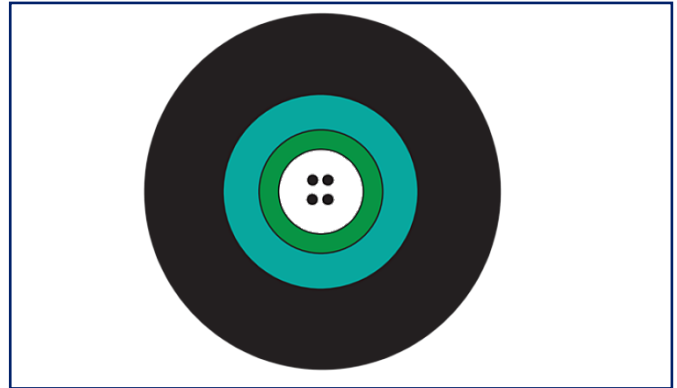

See enlarged drawings at the end of document

### Product specification

- OpDAT outdoor cable
- installation cable A-DQ(ZN)B2Y
- outdoor cable with central loose tube (up to 24 fibres)
- cable structure: filled loose tube
- cable diameter up to 24 fibres: Ø 7.0 mm
- bend insensitive fiber
- UV-resistant, metal-free, longitudinally waterproof, tensile strength and rodent repellent
- cable jacket: LLDPE
- strain relief: longitudinally waterproof wrapping, glass roving elements
- cable for laying in ducts or directly in the ground
- applicable standards: ISO 11801-1, EN50173-1:2002, IEC 60794-1
- all available variants can be created with the configurator



# OpDAT outdoor cable 1x4 OS2 class F<sub>ca</sub>

P/N  
**150A00490120M**  
**EAN 4251394653808**  
 2025/06/17  
 Version: J

## Technical Data

### General Data

Fields of application	structured building cabling
Transmission technology	Fiber optic
Color coding fiber/ wire(s)	IEC 60304
Mode type of the fiber	Singlemode
Fiber class	OS2
Cable Type	Outdoor cable
Number of cables/ buffered fibers	4
Number of fibres each cable/ wire	12
Weight	40 kg/km

### Geometric characteristics

Outer diameter cable jacket (mm)	7 mm
Outer diameter cable jacket (inch)	0.276 in.
Core-/ Fiber cladding diameter	250 µm

### Mechanical data

strain relief	central tension element
Tensile strength during operation	1000 N
Maximum installation load	140 mm
Maximum operating bending radius	70 mm
Impact resistance	20 Nm
Crush (compressive strength)	2000 N/100 mm
Torsion resistance	5 cycles ± 1 rotation

### Materials and material properties

Rodent protection	rodent repellent
Halogen free	yes
Metal-free	yes
UV-resistance	yes

# OpDAT outdoor cable 1x4 OS2 class F<sub>ca</sub>

P/N  
150A00490120M  
EAN 4251394653808  
2025/06/17  
Version: J

## Technical Data

### Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C	-40 °C - 60 °C
Temperature - Storage °F	-40 °F - 140 °F
Temperature - Operating °C	-30 °C - 70 °C
Temperature - Operating °F	-22 °F - 158 °F
Temperature - Installation °C	-15 °C - 70 °C
Temperature - Installation °F	5 °F - 158 °F

### Standards/Regulations

Common test methods for cables under fire conditions

Fire behaviour - class (EN 50399)



Fca

### Classifications

ETIM 7.0	EC000034
ETIM 8.0	EC000034

### Packing details

Type of packaging 1 pc(s) / drum

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 4/4

OpDAT outdoor cable 1x4 OS2 class F<sub>ca</sub>

P/N

150A00490120M

EAN 4251394653808

2025/06/17

Version: J

## Illustrations

Principle diagram

