

Data sheet

ENW-E12, 24 V AC

Page 1/8

P/N
11030810

EAN 4250184121251


2025/08/19

Version: J


Illustrations



Dimensional drawing

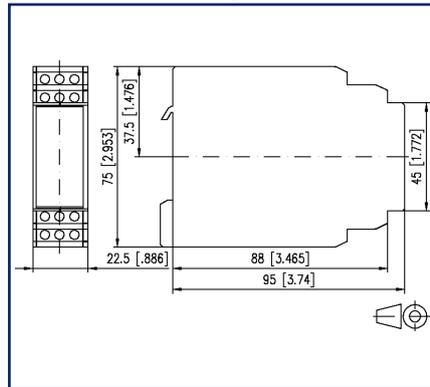

Wiring diagram

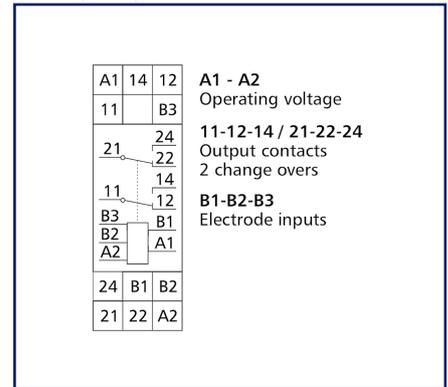

See enlarged drawings at the end of document

Product specification

The level sensor monitors filling levels or leakage of all conductive, noncombustible media. The trigger can be adjusted by means of a proportional potentiometer. As monitor, the device works with an electrode (EO) and the ground connection (EM), e.g. for minimum and maximum levels, to protect submersible pumps from overflowing or running dry. If the surface of the fluid is subject to disturbance, we recommend another electrode (EU). As two-level controller, the device controls pumps or valves for automatically filling and emptying containers by means of the EO and EU electrodes and the EM ground connection. A container wall, being conductive to the medium, can also be used as ground connection. With 2 electrodes connected the contacts B2 and B3 must be connected with a bridge! Variant: 24 V AC



Data sheet
ENW-E12, 24 V AC

Page 2/8

P/N
11030810
EAN 4250184121251
2025/08/19
Version: J

Technical Data

| Supply | |
|--|--|
| Operating voltage | 24 V AC -10% ... +10% |
| Frequency range | 50 ... 60 Hz |
| Recovery time | >= 250 ms |
| Inputs | |
| Response delay | 5 - 50 kOhm, adjustable |
| Release time typical | 20 ms |
| Shutter release delay | <= +/- 0.01 % |
| Outputs | |
| Contacts | 2 changeover contacts |
| Contact material | AgSnO ₂ |
| Switching voltage (max.) | 250 V |
| Continuous Current | 6 A |
| Switch-off delay | 230 V~ 6 A AC1, 230 V~ 3 A AC3, 230 V~ 0,12 A, 60 V~ 0,6 A, 24 V~ 3 A, 12 V~ 4 A DC1 |
| Switching frequency | 600 switching cycles/h |
| Mechanical life | 3x10 ⁷ switching cycles |
| Electrical life | 2x10 ⁵ switching cycles |
| Indicator | green LED |
| Insulation coil - contact set | |
| Nominal voltage of the power supply system | 230 / 400 V AC |
| Overvoltage category | III II |
| Degree of pollution | 2 2 |
| Rated test voltage | 4 kV 2.5 kV |
| Type of insulation | basic insulation reinforced insulation |
| Housing | |
| Dimensions | |
| Dimension (W x H x D) | 22.5 mm x 75 mm x 95 mm |
| Dimension (W x H x D) | 0.886 in. x 2.953 in. x 3.74 in. |
| Weight | 300 g |
| Mounting style | Standard rail TH35 |
| Mounting position | any |
| Apposition | without distance |
| Connection type | Screw type terminal blocks |

Data sheet
ENW-E12, 24 V AC

Technical Data

Terminal blocks

| | |
|--------------------------------------|--|
| Wire cross section solid | 0.2 mm ² - 2.5 mm ² / AWG 22-12 |
| Wire cross section multi | 0.25 mm ² - 2.5 mm ² / AWG 22-12 |
| Wire cross section with wire ferrule | 0.25 mm ² - 2.5 mm ² / AWG 22-12 |
| Screw torque (max.) | 0.5 Nm |
| Stripping length (min.) | 8 mm |

Material

| | |
|---------------------------|-----------------|
| Material - Housing | Polyamid 6.6 V0 |
| Color | gray |
| Material - Terminal block | Polyamid 6.6 V0 |
| Material - Covers | Polyamid 6.6 V0 |

Protection category according to IEC 60529

| | |
|---|------|
| Protection category - housing (acc. to IEC 60529) | IP40 |
| Protection category - terminal blocks (acc. to IEC 60529) | IP20 |

Climatic Data

| | |
|----------------------------|--------------------------|
| Operating | |
| Temperature - Operating °C | 0 °C - 55 °C |
| Temperature - Operating °F | 32 °F - 131 °F |
| Relative humidity | max. 85 % non-condensing |
| Storage | |
| Temperature - Storage °C | -20 °C - 70 °C |
| Temperature - Storage °F | -4 °F - 158 °F |

Power loss

| | |
|-----------------------------------|--------|
| Power loss (typical) coil | 2 W |
| Power loss (typical) Contact rate | 500 mW |

Classifications

| | |
|-----------|----------|
| ETIM 7.0 | EC001447 |
| ETIM 8.0 | EC001447 |
| ETIM 9.0 | EC001447 |
| ETIM 10.0 | EC001447 |

Data sheet
ENW-E12, 24 V AC

Page 4/8

P/N
11030810

EAN 4250184121251

2025/08/19

Version: J

Technical Data**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet
ENW-E12, 24 V AC

Page 5/8

P/N

11030810

EAN 4250184121251

2025/08/19

Version: J


Accessories

| P/N | Designation |
|----------|-----------------------------|
| 11032401 | Submersible electrode TE2 |
| 110329 | Leakage sensor LKS1 |
| 11032901 | Leakage sensor LKS1 brown |
| 11032902 | Leakage sensor LKS-ZD black |




Illustrations

Dimensional drawing

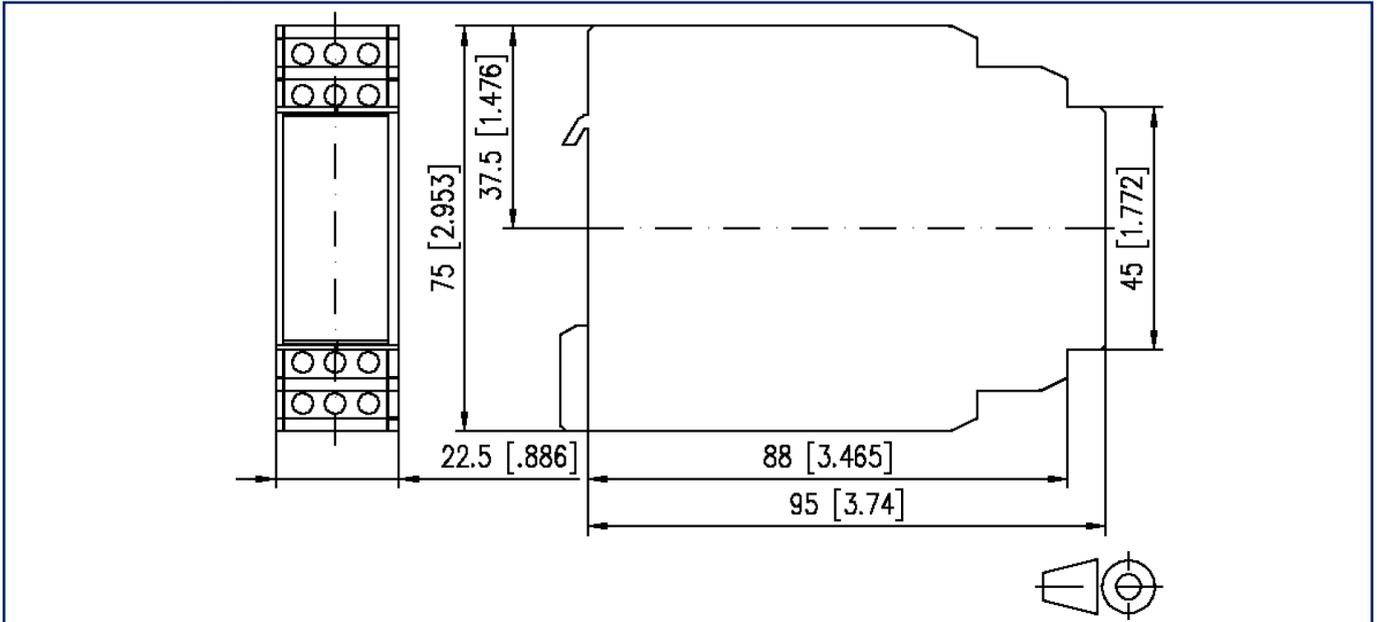

Wiring diagram

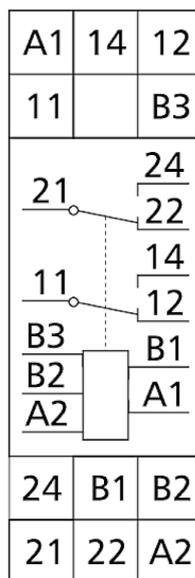

A1 - A2

Operating voltage

11-12-14 / 21-22-24

Output contacts

2 change overs

B1-B2-B3

Electrode inputs


Data sheet
ENW-E12, 24 V AC

Page 7/8


P/N
11030810
EAN 4250184121251
 2025/08/19
 Version: J

Illustrations

Connection example

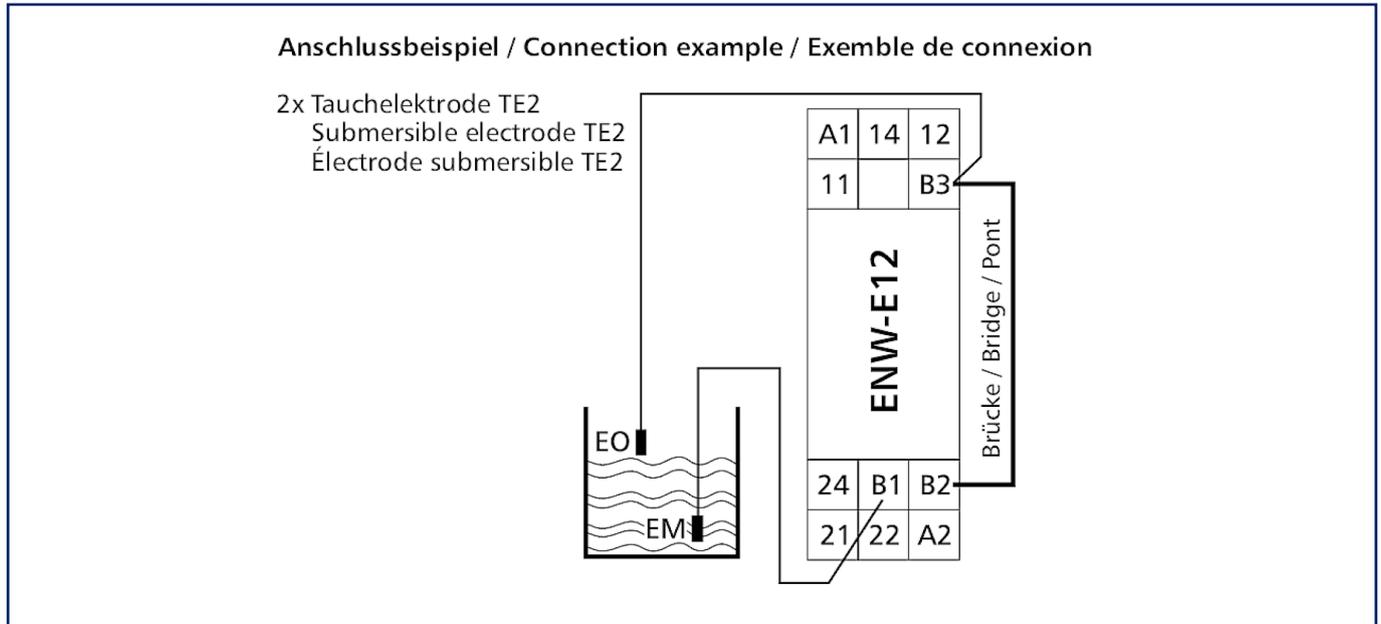

Connection example

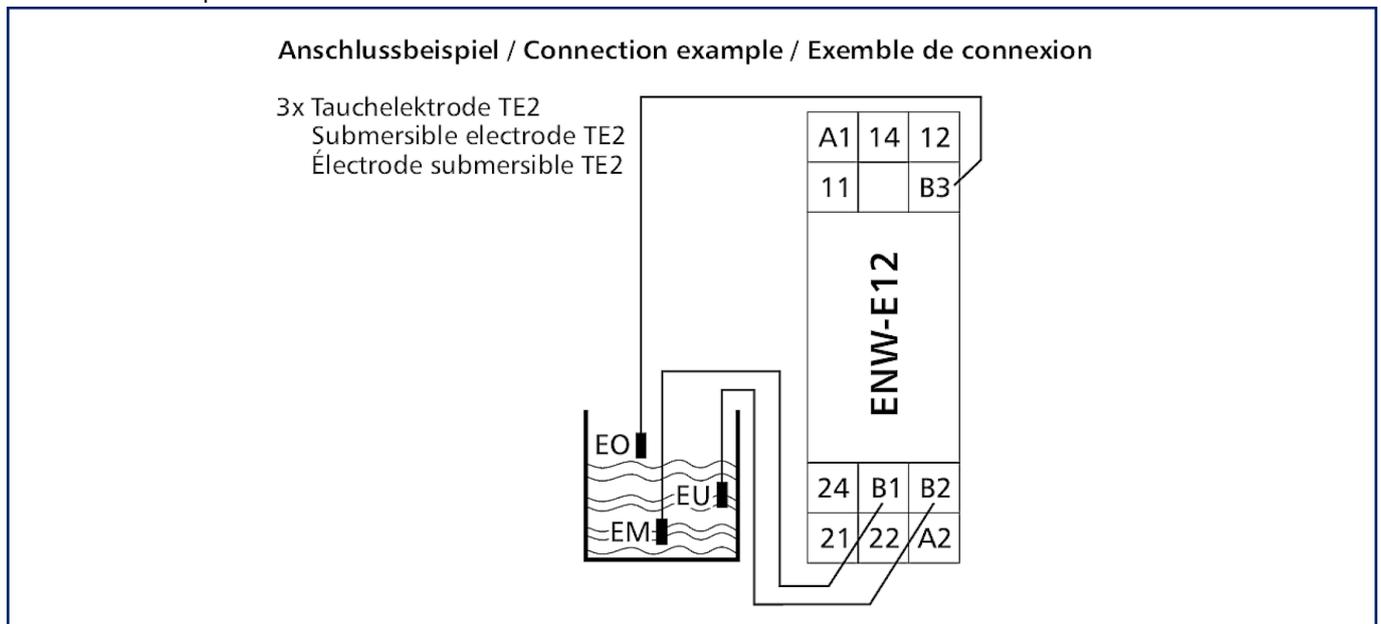

Illustrations

Function diagram

