

# Data sheet

## KRA-M4/1, 1 normally open contact (SPST-NO), 230 V AC

Page 1/7

P/N

11061305

EAN 4250184122586


2025/08/19

Version: G


### Illustrations



Dimensional drawing

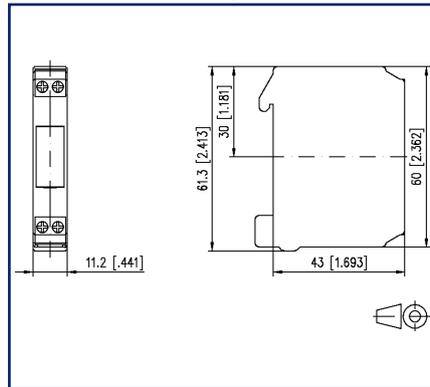

Wiring diagram

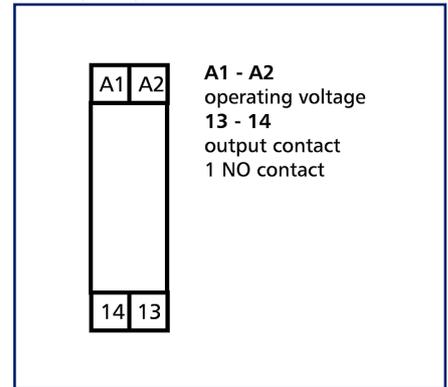

See enlarged drawings at the end of document

### Product specification

Coupling devices are used to secure electrical isolation between logic and load.

- Connection with screw-type terminals
- closed compact series
- integrated protective circuit
- safe separation



Data sheet

**KRA-M4/1, 1 normally open contact (SPST-NO), 230 V AC**

P/N

11061305

EAN 4250184122586

2025/08/19

Version: G

**Technical Data**

**Supply**

Operating voltage	230 V AC -10% ... +10%
Power consumption (max.)	5 mA
Response time typical	10 ms
Release time typical	5 ms

**Outputs**

Contacts	1 normally open contact
Contact material	AgSnO <sub>2</sub>
Switching voltage (max.)	250 V AC/DC
Switch-on current	8 A
Continuous Current	6 A
Switching frequency	600 switching cycles/h
Breaking capacity (resistive load)	
Mechanical life	2x10 <sup>7</sup> switching cycles
Electrical life	1x10 <sup>5</sup> switching cycles
Indicator	red LED

**Insulation coil - contact set**

Nominal voltage of the power supply system	230 / 400 V AC
Overvoltage category	III   II
Degree of pollution	2   2
Rated test voltage	4 kV   2.5 kV
Type of insulation	basic insulation   reinforced insulation

**Housing**

Dimensions	
Dimension (W x H x D)	11.2 mm x 61.3 mm x 43 mm
Dimension (W x H x D)	0.441 in. x 2.413 in. x 1.693 in.
Weight	45 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance
Connection type	Screw type terminal blocks

Data sheet

**KRA-M4/1, 1 normally open contact (SPST-NO), 230 V AC**

P/N

11061305

EAN 4250184122586

2025/08/19

Version: G

**Technical Data**

**Terminal blocks**

Wire cross section solid	0.2 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 22-12
Wire cross section multi	0.25 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 22-12
Wire cross section with wire ferrule	0.25 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm

**Material**

Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0

**Protection category according to IEC 60529**

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

**Climatic Data**

Operating	
Temperature - Operating °C	-20 °C - 55 °C
Temperature - Operating °F	-4 °F - 131 °F
Relative humidity	max. 85 % non-condensing

**Storage**

Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F

**Power loss**

Power loss (typical) coil	300 mW
Power loss (typical) Contact rate	500 mW

**Classifications**

ETIM 7.0	EC001437
ETIM 8.0	EC001437
ETIM 9.0	EC001437
ETIM 10.0	EC001437

Data sheet

Page 4/7

**KRA-M4/1, 1 normally open contact (SPST-NO), 230 V AC**

P/N

11061305

EAN 4250184122586

2025/08/19

Version: G

## Technical Data

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 5/7

**KRA-M4/1, 1 normally open contact (SPST-NO), 230 V AC**

P/N

11061305

EAN 4250184122586

2025/08/19

Version: G

## Accessories

P/N	Designation
820234-01-9	Labeling plate white
850349-02	Connecting bridge, 10 pole



Data sheet

Page 6/7

**KRA-M4/1, 1 normally open contact (SPST-NO), 230 V AC**

P/N

11061305


EAN 4250184122586

2025/08/19


Version: G

## Illustrations

Dimensional drawing

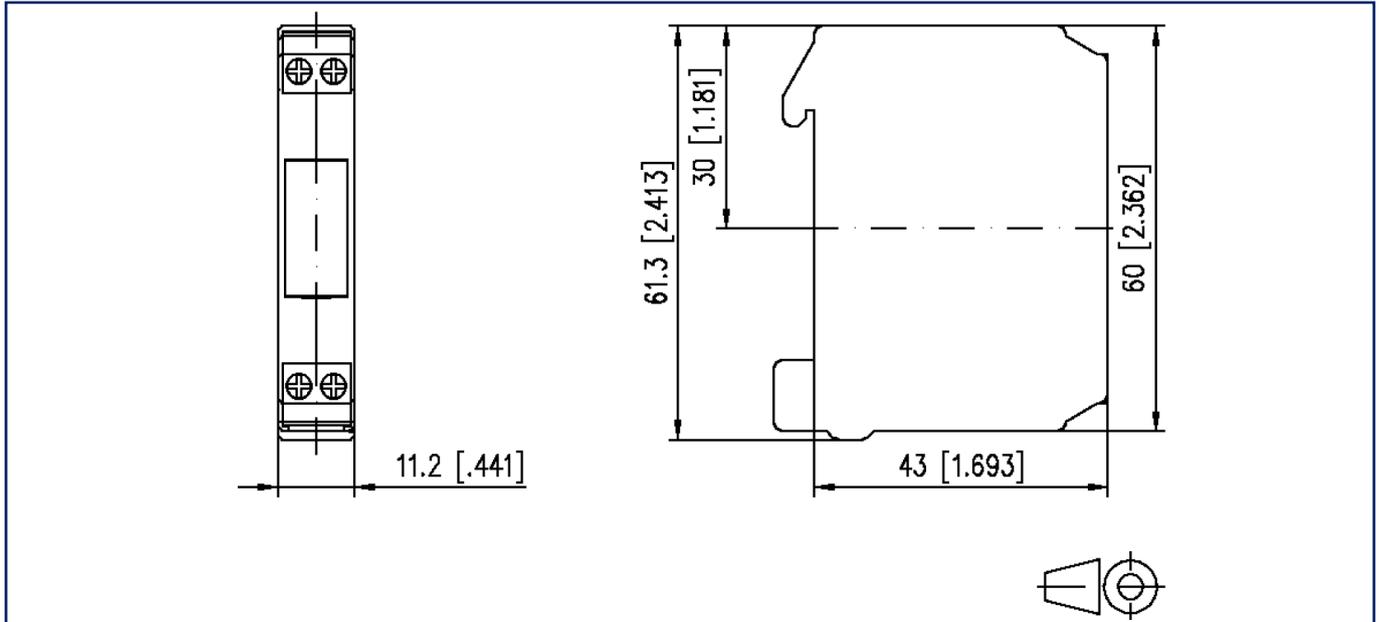

Wiring diagram

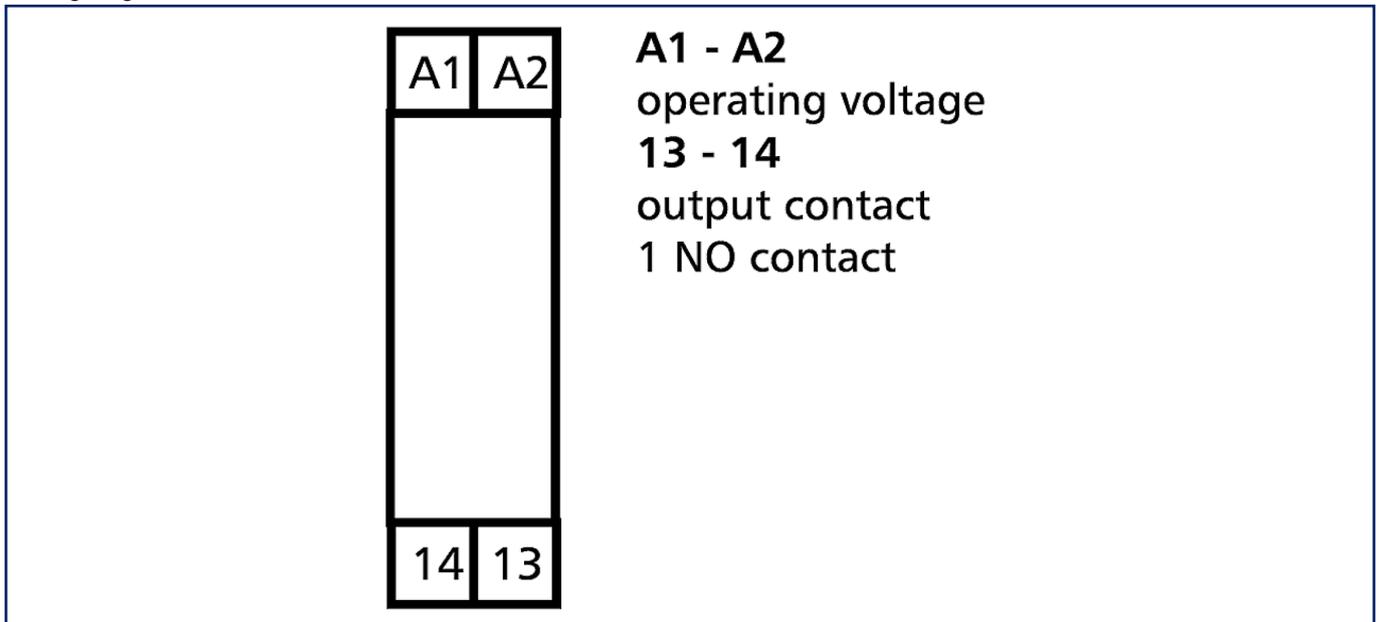

Data sheet

**KRA-M4/1, 1 normally open contact (SPST-NO), 230 V AC**

Page 7/7

P/N

11061305

EAN 4250184122586

2025/08/19

Version: G

## Illustrations

Circuit diagram

