


Flat

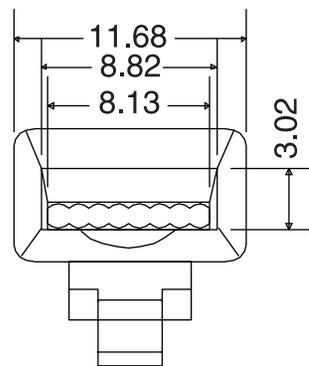

Round

Specifications

Description AJP25A

Unshielded
8 positions

Technical Data AJP25A

Electrical: UL applications: 250 volts AC max at 2 amps

Dielectric withstanding voltage: 500 volts AC

Insulation resistance: 500 megohms

Termination: resistance 35 milliohms max after environmental testing

Mechanical: Cable-to-plug tensile strength: 20lbs min

Durability: 2000 mating cycles

Material & Finish: Housing: polycarbonate, UL94V-2

Color: clear

Contact: high strength copper alloy
50u" Au plating over 100u" nickel in contact area

Conductor: stranded & solid wire, 24, 26, 28 AWG

Ordering Information

AJP25A	8	8	X	3	-	1	2	5
Type	Positions	Contacts	Wire Type	Plating				
			1=Flat 2=Round	3=30u"				
				1=Stranded Wire 2=94V2 Plastic Type 5=Short Body				



P/N: AJP25A88X3-125

Desc.: Unshielded plug, CAT 5e

Date: 4-13-06

Drawn By: Donna Mears

Dimensions in mm

Verified By: Mike Balekdjian