

Data sheet

**M12 Industrial Ethernet cable, D-coded, 2.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N
142M1D25020
EAN 4251122186301
2025/07/09
Version: C

Technical Data

| General Data | |
|-------------------------------------|-----------------------------------|
| Design | Ethernet-Connection cable |
| Shielding | shielded |
| Transmission technology | Copper |
| Cable Type | SF/FTP |
| Number of twisting elements | 2 |
| Twisting element | Pair |
| Wiring | Profinet |
| Color coding fiber/ wire(s) | yellow, white, orange, blue |
| Color | green |
| Dimensions | |
| Dimension - Interface 1 (L x W x H) | 52 mm x 21.5 mm x 21.5 mm |
| Dimension - Interface 1 (L x W x H) | 2.047 in. x 0.846 in. x 0.846 in. |
| Dimension - Interface 2 (L x W x H) | 45.5 mm x 13.3 mm x 13.6 mm |
| Dimension - Interface 2 (L x W x H) | 1.791 in. x 0.524 in. x 0.535 in. |
| Cable length (m) | 2 m |
| Cable length (ft) | 6.56 ft |
| Labeling option | identification label carrier |

| Transmission characteristics | |
|--|-------------|
| Category (ISO) | 5e |
| Transmission rate up to 100 MBit (Fast Ethernet) | IEEE 802.3u |

| Connections/interfaces | |
|--|-----------|
| Connector technology interface 1 | M12-jack |
| Connector technology interface 2 | RJ45 plug |
| Coding interface 1 | D-coded |
| Number of positions/contacts interface 1 | 4 |
| Number of positions/contacts interface 2 | 8P/4C |

**M12 Industrial Ethernet cable, D-coded, 2.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N
142M1D25020
EAN 4251122186301
2025/07/09
Version: C

Technical Data

Connections/interfaces

Termination data, stranded wire (min. - max.)

| | |
|---|----------|
| Conductor cross section, stranded wire | AWG 22/7 |
| Conductor diameter, stranded wire (bare copper) | 0.75 mm |
| Conductor diameter, stranded wire (bare copper) | 0.03 in. |
| Cable sheath diameter (min. - max.) | |
| Cable sheath diameter | 6.5 mm |

Electrical characteristics

| | |
|---------------------------|---------------|
| Current carrying capacity | 4 A at 40 °C |
| Rated voltage | 60 V DC |
| UL rating (cable) | 600 V |
| Insulation resistance | min. 100 MOhm |

Mechanical data

| | |
|--|--------------------------|
| Life - Number of mating cycles | min. 100 |
| Bending radius without load | min. 49 mm |
| Maximum operating bending radius | 26 mm |
| Maximum installation load | 52 mm |
| Number of alternating bending cycles (mechanical resistance) at: | 3 million bending cycles |
| Alternating bending radius | 100 mm |
| velocity | 4 m/s |
| acceleration | 4 m/s ² |
| Shielding braid coverage | 85 % |
| Installation method | PROFINET type C |

Materials and material properties

| | |
|---------------------------------|-------------------------------|
| Material - Conductor | Cu (copper) |
| Material - Conductor Insulation | Polyethylene |
| Material - Cable jacket | PUR |
| Material - Inner cable jacket | FRNC, with an aluminized film |
| Material - Body interface 1 | Plastics |
| Material - Body interface 2 | Plastics |
| Material - Contact interface 1 | CuZnPb (brass) |

Data sheet

**M12 Industrial Ethernet cable, D-coded, 2.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N
142M1D25020
EAN 4251122186301
2025/07/09
Version: C

Technical Data

Materials and material properties

| | |
|---|----------------------------|
| Material - Contact interface 2 | CuZnPb (brass) |
| Material - Contact finish interface 1 | Au (gold) |
| Material - Contact finish interface 2 | Au (gold) |
| Material - Contact carriers interface 1 | Plastics |
| Material - Contact carriers interface 2 | Plastics |
| Material - Union nut interface 1 | CuZnPb (brass) |
| Material - Union nut finish interface 1 | Ni (nickel) |
| Material - Pair shield | plastic film |
| Material - Pair shield finish | Al (Aluminium) |
| Material - Main shield | Cu (copper) braid |
| Material - Main shield finish | Sn |
| Flame retardancy | according to IEC 60332-1-2 |
| Halogen free | yes |
| Oil resistance | yes |
| drag chain suitable | yes |
| RoHS | compliant |

Environmental conditions

| | |
|--------------------------------------|----------------------------|
| Temperature (min. - max.) | |
| Temperature - Operating °C | -30 °C - 90 °C |
| Temperature - Operating °F | -22 °F - 194 °F |
| Particulate ingress interface 1 | IP6X when plugged in |
| Liquid ingress/immersion interface 1 | IPX5, IPX7 when plugged in |
| Particulate ingress interface 2 | IP2X when plugged in |
| Liquid ingress/immersion interface 2 | IPX0 when plugged in |
| Pollution degree interface 1 | 3 |
| Pollution degree interface 2 | 1 |

**M12 Industrial Ethernet cable, D-coded, 2.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N
142M1D25020
EAN 4251122186301
2025/07/09
Version: C

Technical Data

Approvals

UL listed (file no.)



DUXR.E178484

Standards/Regulations

Generic cabling systems

| | |
|--|----------------------------------|
| General requirements | ISO/IEC 11801-1 DIN EN 50173-1 |
| Profinet | yes |
| Connectors for electronic equipment | |
| circular connector | DIN EN 61076-2-101 |
| Multi-element metallic cables used in analogue and digital communication and control | DIN EN 50288-2-1 |
| Common test methods for cables under fire conditions | |
| UN ECE-R 118.01 | R118 |
| Test for vertical flame propagation for a single insulated wire or cable | IEC 60332-1-2 |
| Measurement of smoke density of cables burning | DIN EN 61034 |

Classifications

| | |
|-----------|----------|
| ETIM 7.0 | EC002599 |
| ETIM 8.0 | EC002599 |
| ETIM 9.0 | EC002599 |
| ETIM 10.0 | EC002599 |

Packing details

| | |
|-------------------|-----------------------|
| Type of packaging | 1 pc(s) / plastic bag |
|-------------------|-----------------------|

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 7/8

**M12 Industrial Ethernet cable, D-coded, 2.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N

142M1D25020


EAN 4251122186301

2025/07/09


Version: C

Illustrations

Cut-out

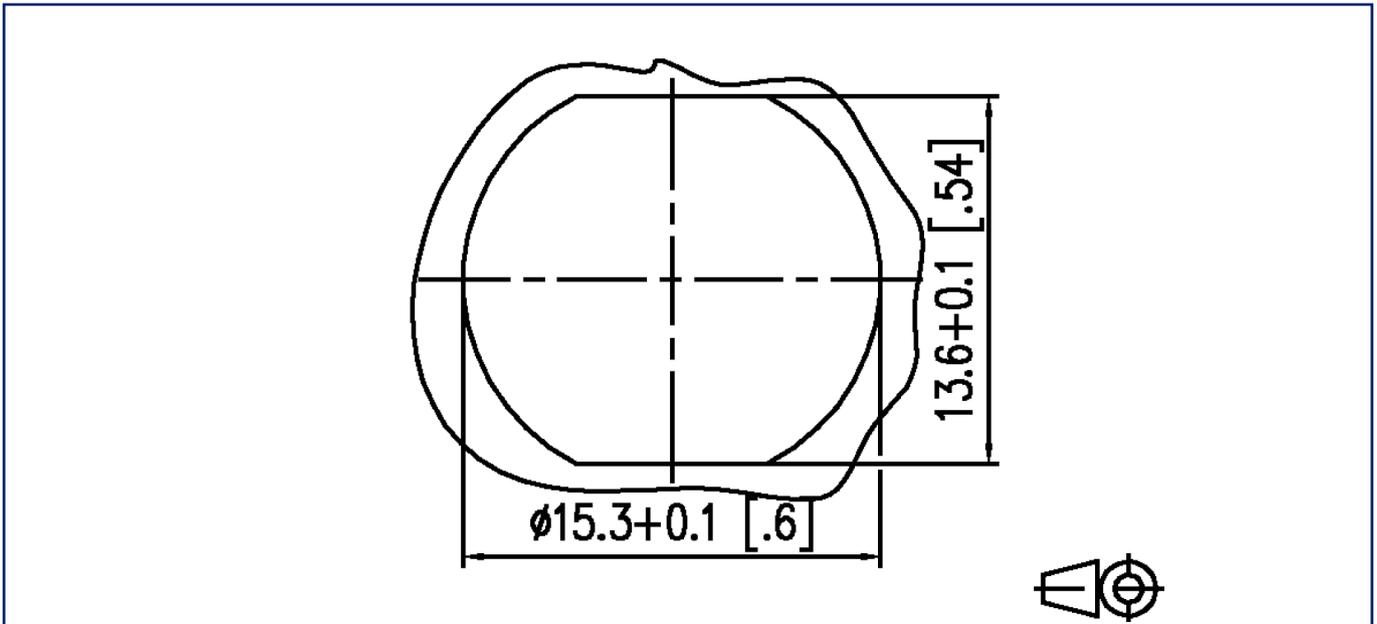

Wiring diagram

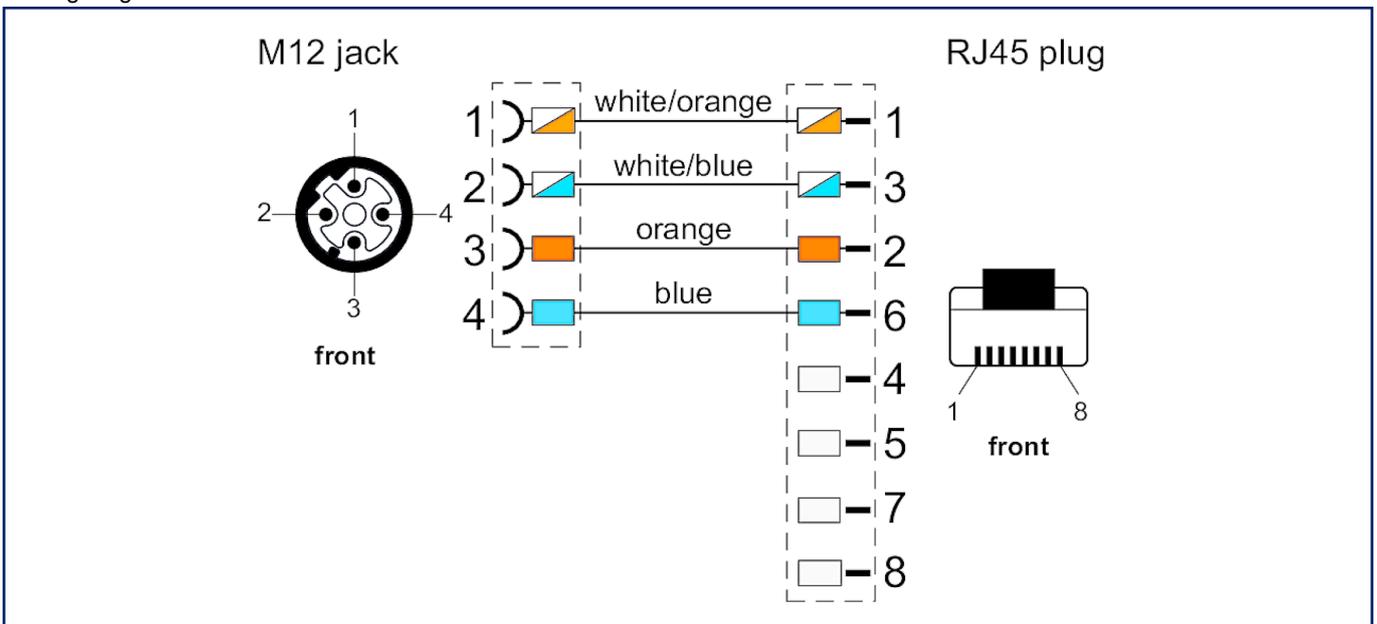

Data sheet

Page 8/8

**M12 Industrial Ethernet cable, D-coded, 2.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N

142M1D25020

EAN 4251122186301

2025/07/09

Version: C

Illustrations

Principle diagram

