

# Data sheet

## OpDAT REGpro front cover 6xE2000-D MM

Page 1/5

P/N

15024A5A06-E

EAN 4250184141709


2025/09/17

Version: AC

## Illustrations



Dimensional drawing

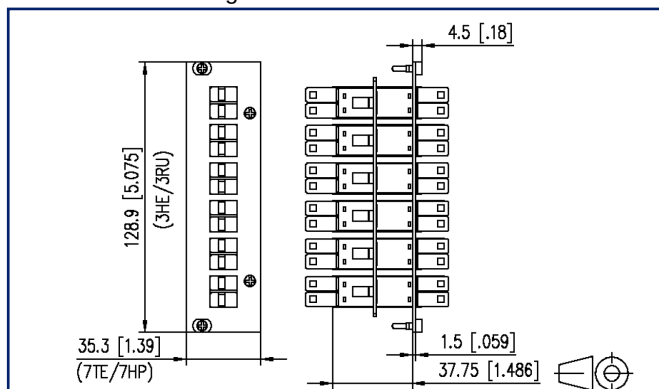

See enlarged drawings at the end of document

## Product specification

- front plate 3RU/HPE with 6 E2000-D adapters
- slotted ceramics sleeve for single mode and multi mode applications
- suitable for mounting in OpDAT REG pro and OpDAT REGpro24
- gray, powder-coated steel sheet
- variants: equipped with 6xE2000-D, each in blue (OS2), beige (OS2) or E2000-D APC green (OS2)



## Data sheet

Page 2/5

## OpDAT REGpro front cover 6xE2000-D MM

P/N

15024A5A06-E

EAN 4250184141709

2025/09/17

Version: AC

## Technical Data

## General Data

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Fields of application                         | structured building cabling<br>office areas<br>data center |
| Mechanical measurement according to MICE      | M1                                                         |
| Ingress measurement according to MICE         | I1                                                         |
| Climatic measurement according to MICE        | C1                                                         |
| Electromagnetic measurement according to MICE | E3                                                         |
| Design                                        | front plate                                                |
| Mounting style                                | 3RU/7HP                                                    |
| Transmission technology                       | Fiber optic                                                |
| Color                                         | beige                                                      |
| Dimensions                                    |                                                            |
| Dimension (L x W x H)                         | 43.75 mm x 128.9 mm x 35.3 mm                              |
| Dimension (L x W x H)                         | 1.722 in. x 5.075 in. x 1.39 in.                           |
| Height unit                                   | 3RU                                                        |
| Horizontal pitch                              | 7HP                                                        |
| Mode type of the fiber                        | Multimode                                                  |

## Connections/interfaces

|                                                  |                   |
|--------------------------------------------------|-------------------|
| Connector technology interface 1                 | E2000 DC Couplers |
| Connector technology interface 2                 | E2000 DC Couplers |
| Number of ports interface 1                      | 6                 |
| Number of ports interface 2                      | 6                 |
| Number of equipped ports interface 1             | 6                 |
| Number of ports interface 2 equipped             | 6                 |
| Number of ports with dust protection interface 1 | 6                 |
| Number of ports with dust protection interface 2 | 6                 |

## Mechanical data

|                                |           |
|--------------------------------|-----------|
| Cut-out                        | E2000 DC  |
| Life - Number of mating cycles | min. 1000 |



## Data sheet

Page 3/5

# OpDAT REGpro front cover 6xE2000-D MM

P/N

15024A5A06-E

EAN 4250184141709

2025/09/17

Version: AC

## Technical Data

### Materials and material properties

|                                  |                  |
|----------------------------------|------------------|
| Material - Mounting plate        | steel            |
| Material - Mounting plate finish | powder-coated    |
| Material - Sleeve                | ceramic, slotted |
| Material - Coupler housing       | Plastics         |
| Halogen free                     | yes              |
| RoHS                             | compliant        |

### Classifications

|           |          |
|-----------|----------|
| ETIM 7.0  | EC001130 |
| ETIM 8.0  | EC001130 |
| ETIM 9.0  | EC001130 |
| ETIM 10.0 | EC001130 |

### Packing details

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

## OpDAT REGpro front cover 6xE2000-D MM

P/N

15024A5A06-E

EAN 4250184141709

2025/09/17

Version: AC

### Accessories from

| P/N           | Designation                                                   |
|---------------|---------------------------------------------------------------|
| 15024A10-24-E | OpDAT REGpro24 housing without splice tray                    |
| 15024A10-E    | OpDAT REGpro housing without splice tray                      |
| 15024A10S-E   | OpDAT REGpro housing with splice tray and crimp splice holder |
| 15024B10-E    | OpDAT REG S for pre-terminated cables                         |
| 15024B10S-E   | OpDAT REG S for crimp splice holder                           |
| 15024B10S-S   | OpDAT REG S for shrink splice holder                          |



Data sheet

Page 5/5

## OpDAT REGpro front cover 6xE2000-D MM

P/N

15024A5A06-E

EAN 4250184141709

2025/09/17

Version: AC

### Illustrations

Dimensional drawing

