

# Data sheet

## OpDAT REGpro front cover 6xLC-D OM3

Page 1/4

P/N


15024A7706-E

EAN 4251122199592


2025/09/18

Version: G

### Illustrations

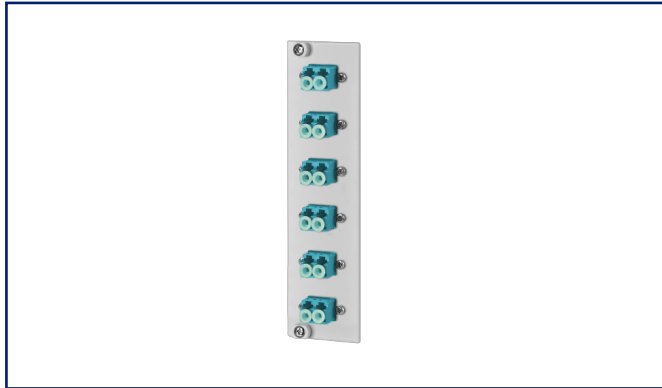

Dimensional drawing

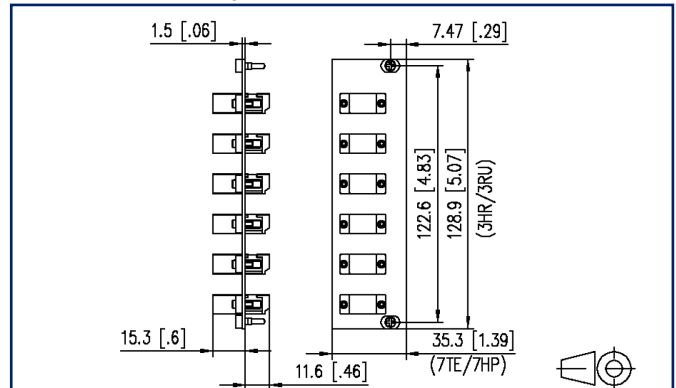

See enlarged drawings at the end of document

### Product specification

- front plate 3RU/7HP with LC-D adapters
- slotted ceramics sleeve for single mode and multimode applications
- suitable for mounting in OpDAT REGpro and OpDAT REG S
- gray, powder-coated steel sheet
- variants: equipped with LC-D-adapters each blue (OS2), lime green (OM5), violet (OM4), aqua (OM3), beige (OM2) or green (OS2 APC)



# OpDAT REGpro front cover 6xLC-D OM3

P/N

15024A7706-E

EAN 4251122199592

2025/09/18

Version: G

## Technical Data

### General Data

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Fields of application                         | structured building cabling<br>office areas<br>data center |
| Mechanical measurement according to MICE      | M1                                                         |
| Ingress measurement according to MICE         | I1                                                         |
| Climatic measurement according to MICE        | C1                                                         |
| Electromagnetic measurement according to MICE | E3                                                         |
| Design                                        | front plate                                                |
| Mounting style                                | 3RU/7HP                                                    |
| Transmission technology                       | Fiber optic                                                |
| Color                                         | aqua                                                       |
| Dimensions                                    |                                                            |
| Dimension (L x W x H)                         | 26.9 mm x 128.9 mm x 35.3 mm                               |
| Dimension (L x W x H)                         | 1.059 in. x 5.075 in. x 1.39 in.                           |
| Height unit                                   | 3RU                                                        |
| Horizontal pitch                              | 7HP                                                        |

### Connections/interfaces

|                                                  |               |
|--------------------------------------------------|---------------|
| Connector technology interface 1                 | LC-D Couplers |
| Connector technology interface 2                 | LC-D Couplers |
| Number of ports interface 1                      | 6             |
| Number of ports interface 2                      | 6             |
| Number of equipped ports interface 1             | 6             |
| Number of ports interface 2 equipped             | 6             |
| Number of ports with dust protection interface 1 | 6             |
| Number of ports with dust protection interface 2 | 6             |

### Mechanical data

|                                |                 |
|--------------------------------|-----------------|
| Cut-out                        | SC, LC-D, E2000 |
| Life - Number of mating cycles | min. 1000       |

**OpDAT REGpro front cover 6xLC-D OM3**

P/N

15024A7706-E

EAN 4251122199592

2025/09/18

Version: G

**Technical Data****Materials and material properties**

|                                  |                  |
|----------------------------------|------------------|
| Material - Mounting plate        | steel            |
| Material - Mounting plate finish | powder-coated    |
| Material - Sleeve                | ceramic, slotted |
| Material - Coupler housing       | Plastics         |
| Halogen free                     | yes              |
| RoHS                             | compliant        |

**Classifications**

|           |          |
|-----------|----------|
| ETIM 7.0  | EC001130 |
| ETIM 8.0  | EC001130 |
| ETIM 9.0  | EC001130 |
| ETIM 10.0 | EC001130 |

**Packing details**

|                   |                       |
|-------------------|-----------------------|
| Type of packaging | 1 pc(s) / plastic bag |
|-------------------|-----------------------|

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



**Illustrations**

Dimensional drawing

