

Data sheet

OpDAT slide² K patch panel splice 6xLC-D APC OS2 gray

P/N


1504997606-F

EAN 4251394688763


2025/10/09

Version: B

Illustrations

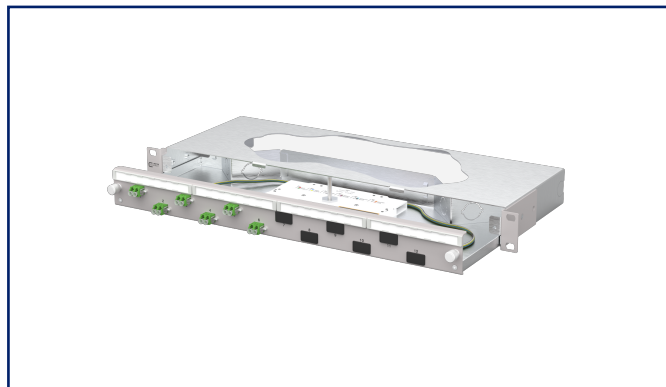

Dimensional drawing

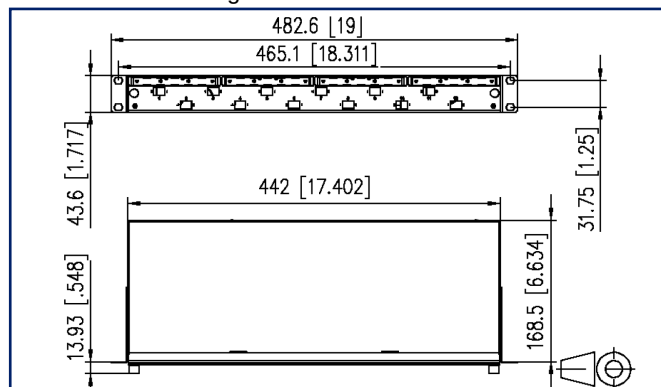

See enlarged drawings at the end of document

Product specification

- 19-inch, 1RU patch panel with pull-out drawer
- 30 % shorter than OpDAT slide²
- Equipped with 6xLC-D couplers and 12xLC OS2 APC pigtails
- Offset coupling arrangement for easy handling
- Pigtails inserted and set down in standard splice cassette with crimp splice holders
- Pigtail visually inspected and inserted into couplers
- Color coding according to IEC 60304
- Tool-free metal bayonet catch for locking the drawer
- Drawer can be tilted and completely removed for easier installation (pull-out stop)
- Depth adjustable by 30 mm
- Front panel with labelling field
- Front panel powder-coated in gray RAL 7035
- Several possibilities for inclined cable entry on the back: 4xM20 (for splice variant), 4xPrefab installation cut-outs (for Prefab variant)



Data sheet

Page 2/6

OpDAT slide² K patch panel splice

6xLC-D APC OS2 gray

P/N

1504997606-F

EAN 4251394688763

2025/10/09

Version: B

Technical Data

General Data

Fields of application	data center office areas structured building cabling interior Distributed building services
Features variant	Prefab
Design	Eithdrawable short
Mounting style	screwable
Transmission technology	Fiber optic
Port numbering	yes
Color housing	metal
Color front plate	RAL 7035 - light gray
Dimensions	
Dimension (L x W x H)	183 mm x 483 mm x 44 mm
Dimension (L x W x H)	7.205 in. x 19.016 in. x 1.732 in.
Inches	19 inches
Height unit	1RU
Installation depth	169 mm
Installation depth	6.654 in.
Number of cables/ buffered fibers	12
Cable Type	pigtail(s)
Fiber class	OS2
Mode type of the fiber	Singlemode
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm
Labeling option	label strip / labeling strip

Connections/interfaces

Adapter type	LC-D
Adapter interface outside	LC-D
Adapter interface inside	LC-D
Number of adapters	6
Number of breakouts front panel	12
Number of blind	6



Data sheet

Page 3/6

OpDAT slide² K patch panel splice 6xLC-D APC OS2 gray

P/N

1504997606-F

EAN 4251394688763

2025/10/09

Version: B

Technical Data

Connections/interfaces

Cable access/outlet several possibilities for inclined cable entry on the back

Optical characteristics

Insertion loss max. 0,3 dB
Return loss min. 65 dB

Mechanical data

Cut-out SC-S/LC-D/E2000-S
Connector type duplex
Life - Number of mating cycles min. 1000
strain relief optional

Materials and material properties

Material - Housing sheet steel
Material - Housing finish Zn (zinc)
Material - Front cover sheet steel
Material - Front cover finish powder-coated
Material - Sleeve ceramic, slotted
Material - Coupler housing Plastics

Standards/Regulations

FO connector interfaces LC - IEC 61754-20
Fiber standard ISO/IEC 60793-2-50 (B6_a1) | ITU-T G.657.A1
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods
Fibre optic interconnecting devices and passive components - Insertion loss IEC 61300-3-4
Fibre optic interconnecting devices and passive components - Return loss IEC 61300-3-6
Fibre optic interconnecting devices and passive components - Visual inspection of plug end face IEC 61300-3-35
Color coding fiber/ wire(s) IEC 60304 /VDE 0888



Data sheet

Page 4/6

**OpDAT slide² K patch panel splice
6xLC-D APC OS2 gray**

P/N

1504997606-F

EAN 4251394688763

2025/10/09

Version: B

Technical Data**Classifications**

ETIM 8.0	EC001130
ETIM 9.0	EC001130
ETIM 10.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 5/6

OpDAT slide² K patch panel splice 6xLC-D APC OS2 gray

P/N

1504997606-F

EAN 4251394688763

2025/10/09

Version: B

Accessories

P/N	Designation
150240M20Z-E	OpDAT strain relief M20
150240M25Z-E	OpDAT strain relief M25
150240Z20Z-E	OpDAT strain relief for M20
1509010000-E	OpDAT splice tray for 12 splices, unequipped
1509010001-E	OpDAT splice tray with 1 crimp protection cover
1509010002-E	OpDAT splice tray with 2 splice protection cover
15090200-E	OpDAT cover for splice tray



Data sheet

Page 6/6

OpDAT slide² K patch panel splice 6xLC-D APC OS2 gray

P/N

1504997606-F

EAN 4251394688763

2025/10/09

Version: B

Illustrations

Dimensional drawing

