

# Data sheet

Page 1/6

## OpDAT Wall-mounted distributor S 6xSC-D APC OS2 splice

P/N

150329F206-E

EAN 4251394608969


2025/05/27

Version: F


### Illustrations



Dimensional drawing

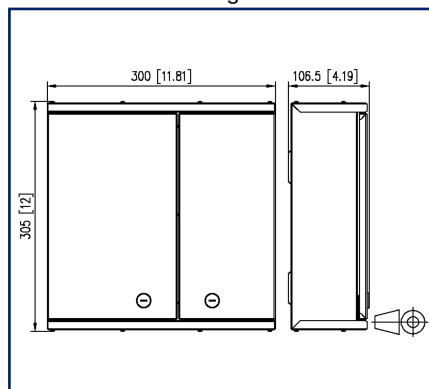

Drill pattern

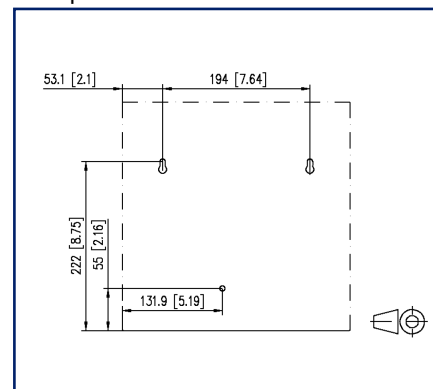

See enlarged drawings at the end of document

### Product specification

- distributor for universal use in floor cabling or as a building distribution point in the equipment room
- equipped with SC-D APC-adapters and pigtails
- pigtails inserted and stripped in standard splice tray with crimp splice holders
- unused openings are closed by blind plugs
- wall-mount housing with two lockable swing doors, two different locks to separate network and building cabling
- easy, space saving wall mounting
- easy access possibilities and a secure routing of the pigtails
- four cable infeeds (scope of supply): 2x for M20/PG16, 2x for patch cords
- variants: size S: 305x300x107 mm or size M: 405x400x107 mm



## Data sheet

Page 2/6

## OpDAT Wall-mounted distributor S 6xSC-D APC OS2 splice

P/N

150329F206-E

EAN 4251394608969

2025/05/27

Version: F

## Technical Data

## General Data

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Fields of application                         | structured building cabling<br>office areas<br>data center |
| Mechanical measurement according to MICE      | M1                                                         |
| Ingress measurement according to MICE         | I1                                                         |
| Climatic measurement according to MICE        | C1                                                         |
| Electromagnetic measurement according to MICE | E3                                                         |
| Design                                        | Wall-mounted distributor                                   |
| Mounting style                                | AP                                                         |
| Transmission technology                       | Fiber optic                                                |
| Port numbering                                | yes                                                        |
| Color                                         | green                                                      |
| Dimensions                                    |                                                            |
| Dimension (L x W x H)                         | 106.5 mm x 300 mm x 305 mm                                 |
| Dimension (L x W x H)                         | 4.193 in. x 11.811 in. x 12.008 in.                        |
| Number of cables/ buffered fibers             | 12                                                         |
| Cable Type                                    | pigtail(s)                                                 |
| Fiber class                                   | OS2                                                        |
| Mode type of the fiber                        | Singlemode                                                 |
| Shape                                         | APC (Angled Physical Contact)                              |
| Fiber construction                            | 9/125 µm                                                   |
| Labeling option                               | printed numbers                                            |

## Connections/interfaces

|                                      |                    |
|--------------------------------------|--------------------|
| Connector technology interface 1     | SC-D Couplers      |
| Connector technology interface 2     | SC-D Couplers      |
| Number of ports interface 1          | 12                 |
| Number of ports interface 2          | 12                 |
| Number of equipped ports interface 1 | 6                  |
| Number of ports interface 2 equipped | 6                  |
| Cable access/outlet                  | from top or bottom |



## Data sheet

Page 3/6

# OpDAT Wall-mounted distributor S 6xSC-D APC OS2 splice

P/N

150329F206-E

EAN 4251394608969

2025/05/27

Version: F

## Technical Data

### Mechanical data

|                |                  |
|----------------|------------------|
| Cut-out        | SC-D, LC-Q, ST-D |
| Connector type | duplex           |

### Materials and material properties

|                               |               |
|-------------------------------|---------------|
| Material - Housing            | sheet steel   |
| Material - Housing finish     | powder-coated |
| Material - Front cover        | sheet steel   |
| Material - Front cover finish | powder-coated |
| Halogen free                  | yes           |
| RoHS                          | compliant     |

### Standards/Regulations

|                                                                                                    |                                              |
|----------------------------------------------------------------------------------------------------|----------------------------------------------|
| FO connector interfaces                                                                            | IEC 61754-4                                  |
| Optical fibers: Indoor optical cables                                                              |                                              |
| Sectional specification for class A B single-mode fibres                                           | ISO/IEC 60793-2-50 type B.1.3 & B6_a         |
| Optical fibers - Interconnecting devices and passive components - basic test and measuring methods |                                              |
| Fibre optic interconnecting devices and passive components - Insertion loss                        | IEC 61300-3-4                                |
| Fibre optic interconnecting devices and passive components - Return loss                           | IEC 61300-3-6                                |
| Fibre optic interconnecting devices and passive components - Visual inspection of plug end face    | IEC 61300-3-35                               |
| Standard colours for insulation for low-frequency cables & wires                                   | IEC 60304                                    |
| ITU-T standard                                                                                     | ITU-T G.657.A1 compatible with ITU-T G.652.D |

### Classifications

|          |          |
|----------|----------|
| ETIM 7.0 | EC001130 |
| ETIM 8.0 | EC001130 |
| ETIM 9.0 | EC001130 |

### Packing details

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|



Data sheet

Page 4/6

**OpDAT Wall-mounted distributor S 6xSC-D APC OS2 splice**

P/N

**150329F206-E****EAN 4251394608969**

2025/05/27

Version: F

**Technical Data****Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 5/6

## OpDAT Wall-mounted distributor S 6xSC-D APC OS2 splice

P/N

150329F206-E

EAN 4251394608969

2025/05/27

Version: F

### Accessories

| P/N         | Designation                                                                 |
|-------------|-----------------------------------------------------------------------------|
| 15032Z001-E | Cable infeed for 2xM20 for OpDAT Wall-mounted distributor S                 |
| 15032Z003-E | Cable infeed for 1xM25 for OpDAT Wall-mounted distributor S                 |
| 15032Z004-E | Cable infeed for two mounting plates VIK for OpDAT Wall-mounted distributor |
| 15032Z005-E | Cable infeed for patch cords for OpDAT Wall-mounted distributor S           |
| 15032Z006-E | Cable infeed for single cable for OpDAT Wall-mounted distributor S          |
| 15032Z089-E | OpDAT WV rotary bolt                                                        |
| 150800119-E | One-Click™- Cleaner Mini SC/ST/FC/E2000                                     |
| 15090200-E  | OpDAT cover for splice tray                                                 |
| 15090505-I  | Blind cover<br>SC-Duplex/LC-Quad/ST-Duplex black, without overhang          |



# OpDAT Wall-mounted distributor S 6xSC-D APC OS2 splice

P/N

150329F206-E


EAN 4251394608969

2025/05/27

Version: F

## Illustrations

Dimensional drawing

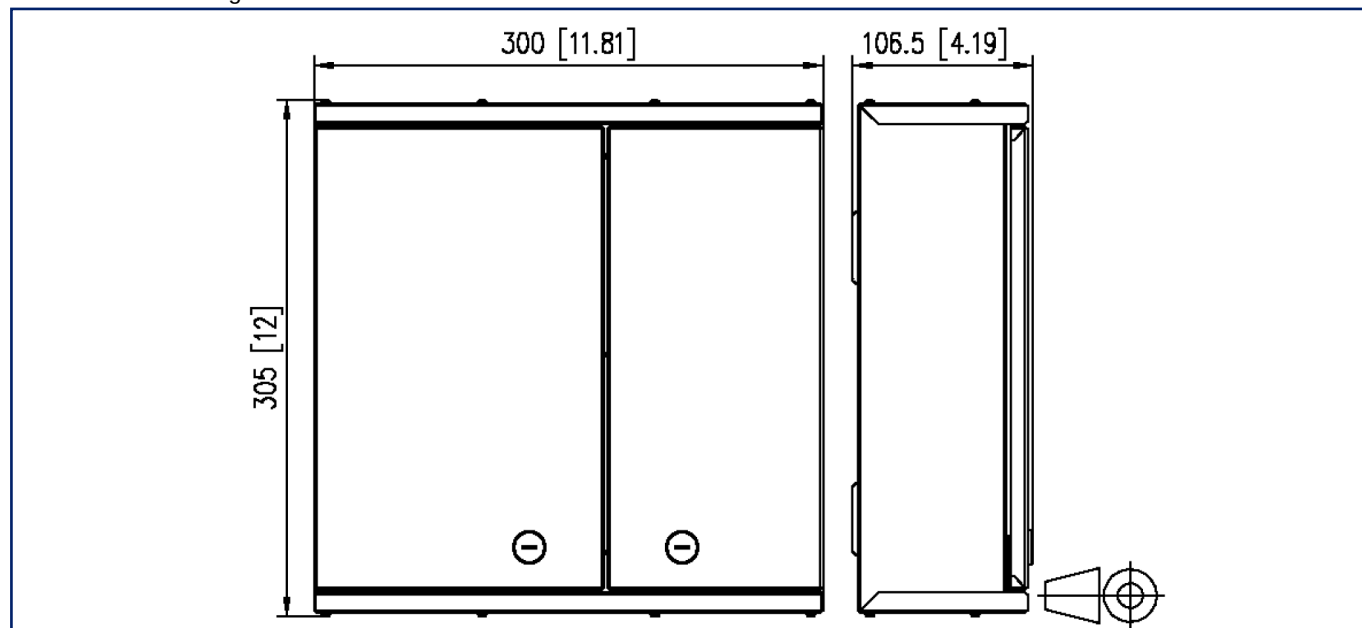

Drill pattern

