

Data sheet

DCCS subassembly OM4 6xMTP type A

Page 1/5

P/N


130D207M00000A

EAN 4251394644905


2025/06/11

Version: D

Illustrations

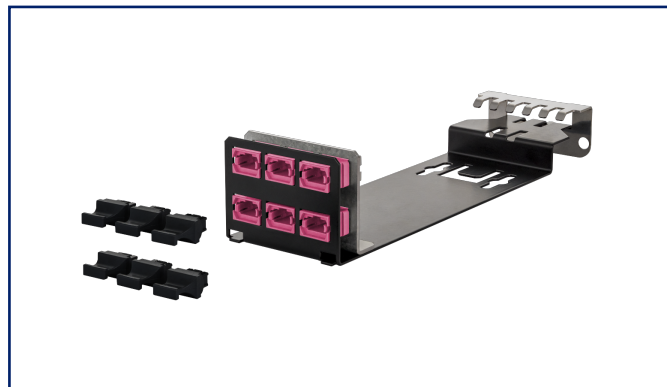

Dimensional drawing

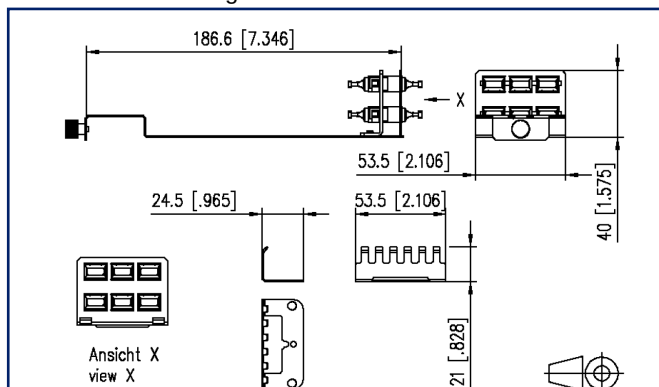

See enlarged drawings at the end of document

Product specification

- DCCS holder with 6 MPO/MTP adapters front mounted
- MM adapters available for "aligned" (key up/key up, type B) and "opposed" (key up/key down, type A) assignment
- SM adapters available for "opposed" assignment (key up/key down, type A)
- easy assembly/disassembly in DCCS subrack (19 inch, 1 RU)
- suitable for installation of MPO/MTP câbles de liaison in customer specific lengths
- housing: black powder-coated steel-sheet housing, strain relief via included holder
- variants: green (SM), lime green (OM5), violet (OM4), aqua (OM3), assignment type A, assignment type B
- all available variants can be created with the configurator



Data sheet

Page 2/5

DCCS subassembly OM4 6xMTP type A

P/N

130D207M00000A

EAN 4251394644905

2025/06/11

Version: D

Technical Data

General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	subassembly / assembly / module / unit
Mounting style	DCCS
Transmission technology	Fiber optic
Port numbering	yes
Color	violet
Dimensions	
Dimension (L x W x H)	211 mm x 53 mm x 40 mm
Dimension (L x W x H)	8.307 in. x 2.087 in. x 1.575 in.
Fiber class	for OM4
Mode type of the fiber	Multimode

Connections/interfaces

Connector technology interface 1	MPO/MTP adapters Key up / Key down
Number of ports interface 1	6
Number of equipped ports interface 1	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6

Mechanical data

Cut-out	DCCS
Life - Number of mating cycles	min. 500
strain relief	optional

Materials and material properties

Material - Assembly housing	sheet steel
Material - Coupler housing	PEI (polyetherimide)
Material - Dust protection	PC (polycarbonate)



Data sheet

Page 3/5

DCCS subassembly OM4 6xMTP type A

P/N

130D207M00000A

EAN 4251394644905

2025/06/11

Version: D

Technical Data
Materials and material properties

Halogen free	yes
RoHS	compliant

Classifications

ETIM 7.0	EC001129
ETIM 8.0	EC001129
ETIM 9.0	EC001129

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

DCCS subassembly OM4 6xMTP type A

P/N

130D207M00000A**EAN 4251394644905**

2025/06/11

Version: D

Accessories from

P/N	Designation
130D2B1B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B1G-E	DCCS2 BGT 19 inch 1RU subrack light gray
130D2B2B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B2G-E	DCCS2 BGT 19 inch 1RU subrack light gray



DCCS subassembly OM4 6xMTP type A

P/N

130D207M00000A

EAN 4251394644905

2025/06/11

Version: D

Illustrations

Dimensional drawing

