

Data sheet

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

Page 1/9

P/N

110310412231

EAN 4250184121275


2025/11/03

Version: K


Illustrations



Dimensional drawing

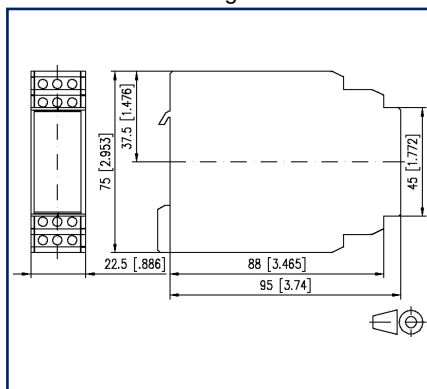

Wiring diagram

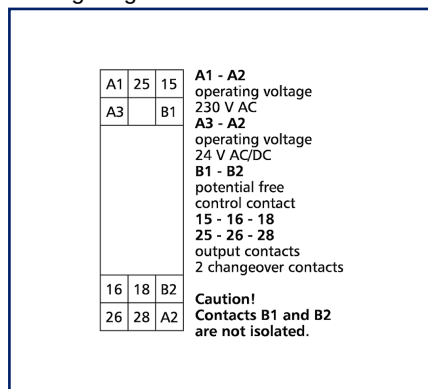

See enlarged drawings at the end of document

Product specification

Multi-functional timer relay with incorporated coding switches to set functions. The time is set by means of a linear potentiometer on a relative scale.

- Four adjustable time ranges for each device
- 0.1 min to 10 h
- Six selectable functions
- 1. On-delayed
- 2. Making-pulse interval
- 3. Off-delay
- 4. Breaking-pulse interval
- 5. Flashing for pause start
- 6. Flashing for pulse start



Data sheet

Page 2/9

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

P/N

110310412231

EAN 4250184121275

2025/11/03

Version: K

Technical Data

Supply

Operating voltage	230 V AC / 24 V AC/DC -10% ... +10%
Frequency range	50 ... 60 Hz
Duty cycle relative	100 %
Response time typical	20 ms
Release time typical	20 ms
Fallback voltage range	≥ 0.15 UN
Recovery time	≥ 250 ms
Time Ranges	
Time range adjustable	0.1 min - 10 h
Repeatability	± 0.01 %

Inputs

Minimum switch-on duration	
Minimum switch-on duration (control contact)	≥ 0.2 s

Outputs

Contacts	2 changeover contacts
Contact material	AgNi
Switching voltage (max.)	250 V
Continuous Current	6 A
Switching frequency	1200 switching cycles/h
Mechanical life	1×10^7 switching cycles
Electrical life	1×10^5 switching cycles
Indicator	green and red LED

Insulation coil - contact set

Nominal voltage of the power supply system	230 / 400 V AC
Overvoltage category	III II
Degree of pollution	2 2
Rated test voltage	4 kV 2.5 kV
Type of insulation	basic insulation reinforced insulation



Data sheet

Page 3/9

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

P/N

110310412231

EAN 4250184121275

2025/11/03

Version: K

Technical Data

Housing

Dimensions

Dimension (W x H x D)	22.5 mm x 75 mm x 95 mm
Dimension (W x H x D)	0.886 in. x 2.953 in. x 3.74 in.
Weight	150 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance
Connection type	Screw type terminal blocks

Terminal blocks

Wire cross section solid	0.2 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section multi	0.25 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section with wire ferrule	0.25 mm ² - 2.5 mm ² / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm

Material

Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polyamid 6.6 V0

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Climatic Data

Operating

Temperature - Operating °C	-10 °C - 55 °C
Temperature - Operating °F	14 °F - 131 °F
Relative humidity	max. 85 % non-condensing

Storage

Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F



Data sheet

Page 4/9

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

P/N

110310412231**EAN 4250184121275**

2025/11/03

Version: K

Technical Data**Classifications**

ETIM 7.0	EC001439
ETIM 8.0	EC001439
ETIM 9.0	EC001439
ETIM 10.0	EC001439

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 5/9

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

P/N

110310412231


EAN 4250184121275

2025/11/03

Version: K

Illustrations

Dimensional drawing

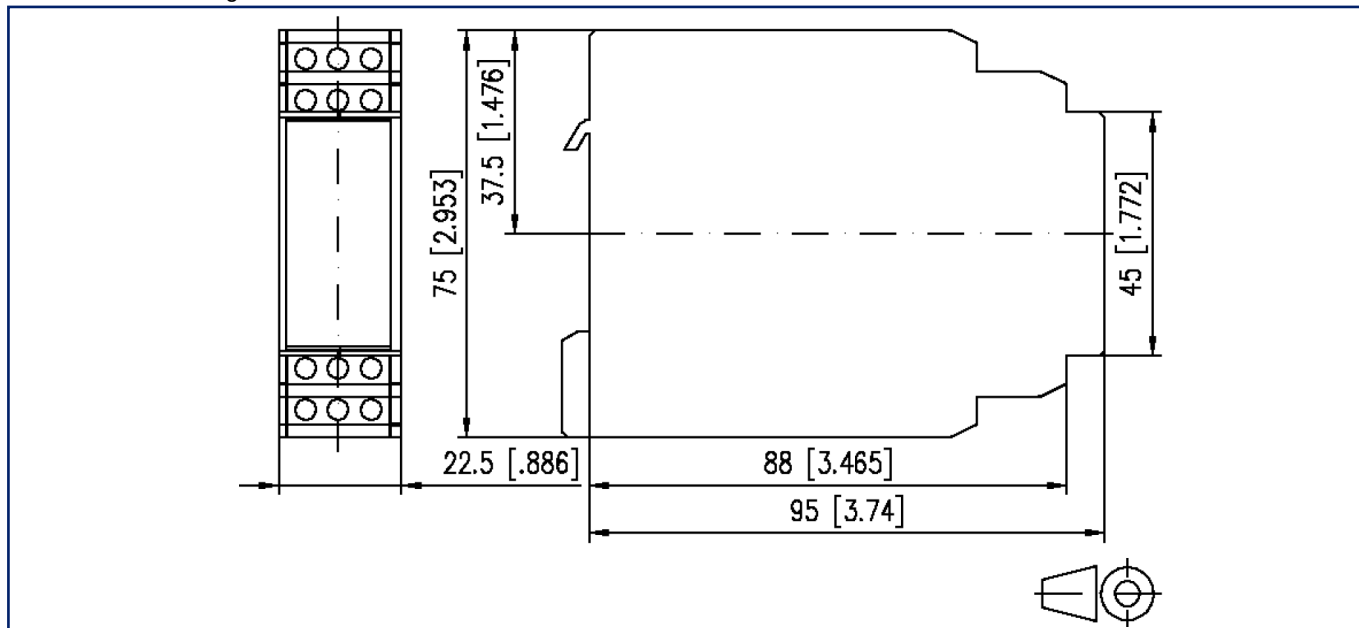

Wiring diagram

A1	25	15
A3		B1
16	18	B2
26	28	A2

A1 - A2
operating voltage
230 V AC
A3 - A2
operating voltage
24 V AC/DC
B1 - B2
potential free
control contact
15 - 16 - 18
25 - 26 - 28
output contacts
2 changeover contacts

Caution!
Contacts B1 and B2
are not isolated.



Data sheet

Page 6/9

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

P/N

110310412231


EAN 4250184121275

2025/11/03


Version: K

Illustrations

Circuit diagram

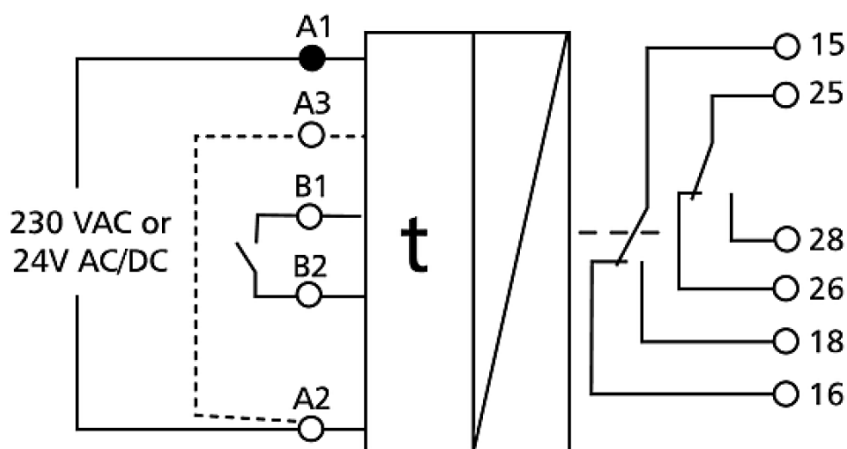


Function diagram

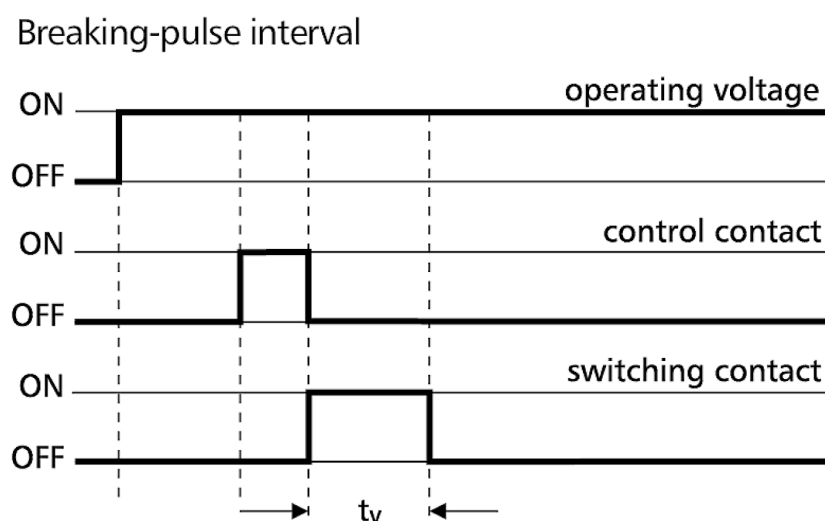

Illustrations


Function diagram

Flashing for pause start

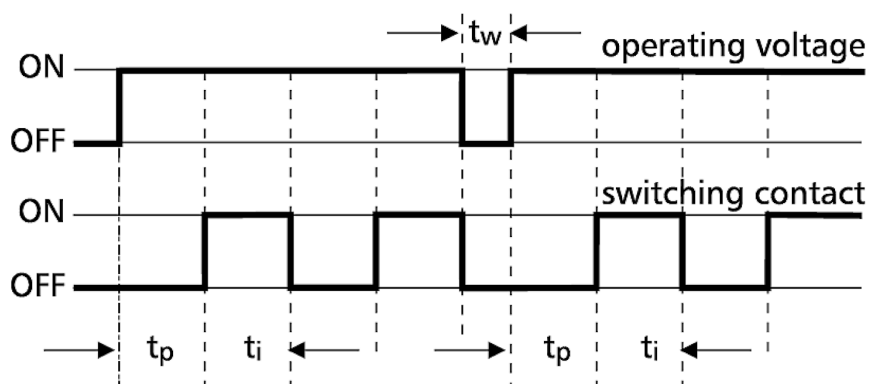

Function diagram

Flashing for pulse start

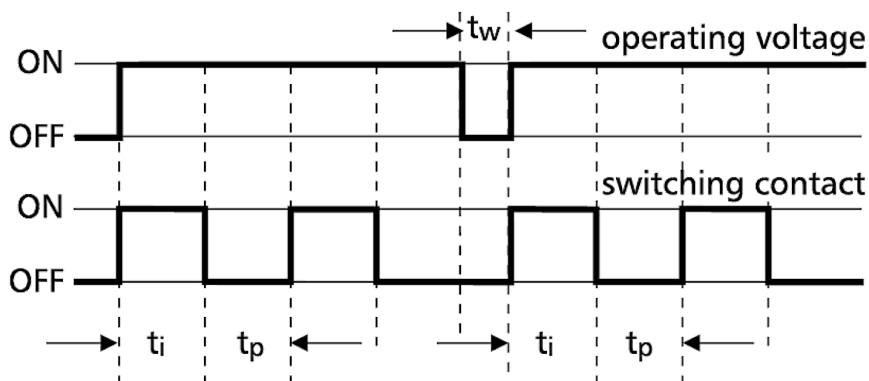

Data sheet

Page 8/9

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

P/N

110310412231

EAN 4250184121275


2025/11/03

Version: K

Illustrations


Function diagram

Making-pulse interval

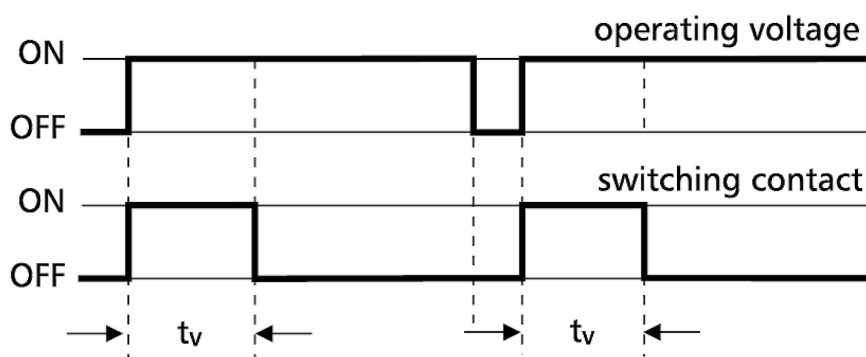

Function diagram

On-delayed

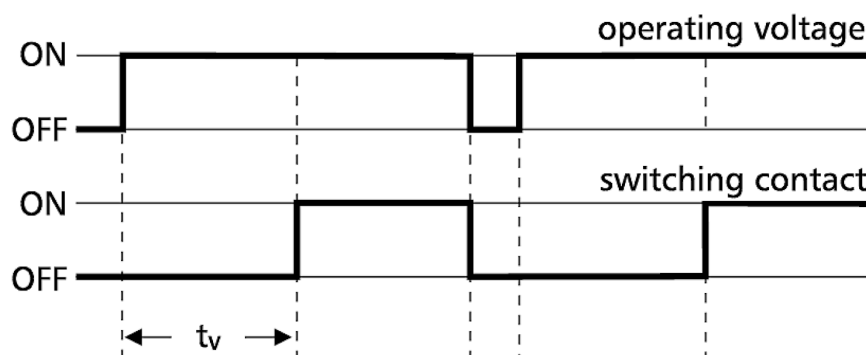

Data sheet

MFRk-E12, 230 V AC / 24 V AC/DC, 0,1 min-10 h

Page 9/9

P/N

110310412231

EAN 4250184121275

2025/11/03

Version: K

Illustrations

Function diagram

