

# Data sheet

## PM015xxVBHC Type 317

Page 1/5

P/N  
313171xx22

xx=number of poles


2025/08/22

Version: AW


### Illustrations



Dimensional drawing as an example

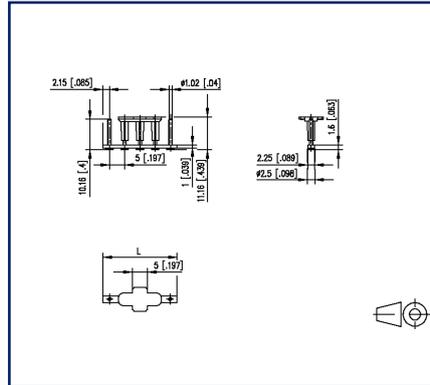

PCB-Layout

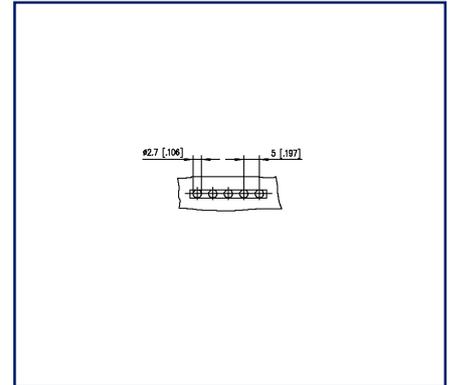

See enlarged drawings at the end of document

### Product specification

- pin header, SMT solderable
- centerline 5.00 mm, direction of connection vertical 0°
- fittable without loss of poles
- color black
- Tape & Reel packaging



**Data sheet**  
**PM015xxVBHC Type 317**

**P/N**  
**313171xx22**  
**xx=number of poles**  
2025/08/22  
Version: AW

**Technical Data**

**General Data**

min. number of poles	2		
max. number of poles	6		
Insulating material class	CTI 400		
clearance/creepage dist.	2.5 mm		
Protection category	IP00		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	320 V	320 V
Rated test voltage	4 kV	4 kV	4 kV

**Approvals**

 /	300 V / 10 A
---	--------------

**Material**

insulating material	PA
flammability class	V0
contact pin material	CuZn
contact pin surface	Ni + Sn
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

**Climatic Data**

upper limit temperature	105 °C
lower limit temperature	-40 °C

**general**

Tolerance	ISO 2768 -mH
Solderability	reflowable

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

**Data sheet**  
**PM015xxVBHC Type 317**

**P/N**  
**313171xx22**

**xx=number of poles**

2025/08/22

Version: AW

**Counterpart of**

P/N	Designation
311571	RP095xxRBWC Type 157 with clip system
31157102	RP09502RBWC Type 157 with clip system
31157103	RP09503RBWC Type 157 with clip system
31157104	RP09504RBWC Type 157 with clip system
31157105	RP09505RBWC Type 157 with clip system
31157106	RP09506RBWC Type 157 with clip system
31157107	RP09507RBWC Type 157 with clip system
31157108	RP09508RBWC Type 157 with clip system
31157109	RP09509RBWC Type 157 with clip system
31157110	RP09510RBWC Type 157 with clip system
31157111	RP09511RBWC Type 157 with clip system
31157112	RP09512RBWC Type 157 with clip system
311581	RP095xxRDVC Typ 158
ASP145	SP145xxHBNC ASP145
ASP145XX22-131	SP145xxHBPC0001
ASP155	SP155xxHBNC ASP155
ASP155XX22-131	SP155xxHBPC0001


Data sheet  
**PM015xxVBHC Type 317**

Page 4/5

P/N  
**313171xx22**  
 xx=number of poles  
 2025/08/22  
 Version: AW

**Illustrations**

Dimensional drawing as an example

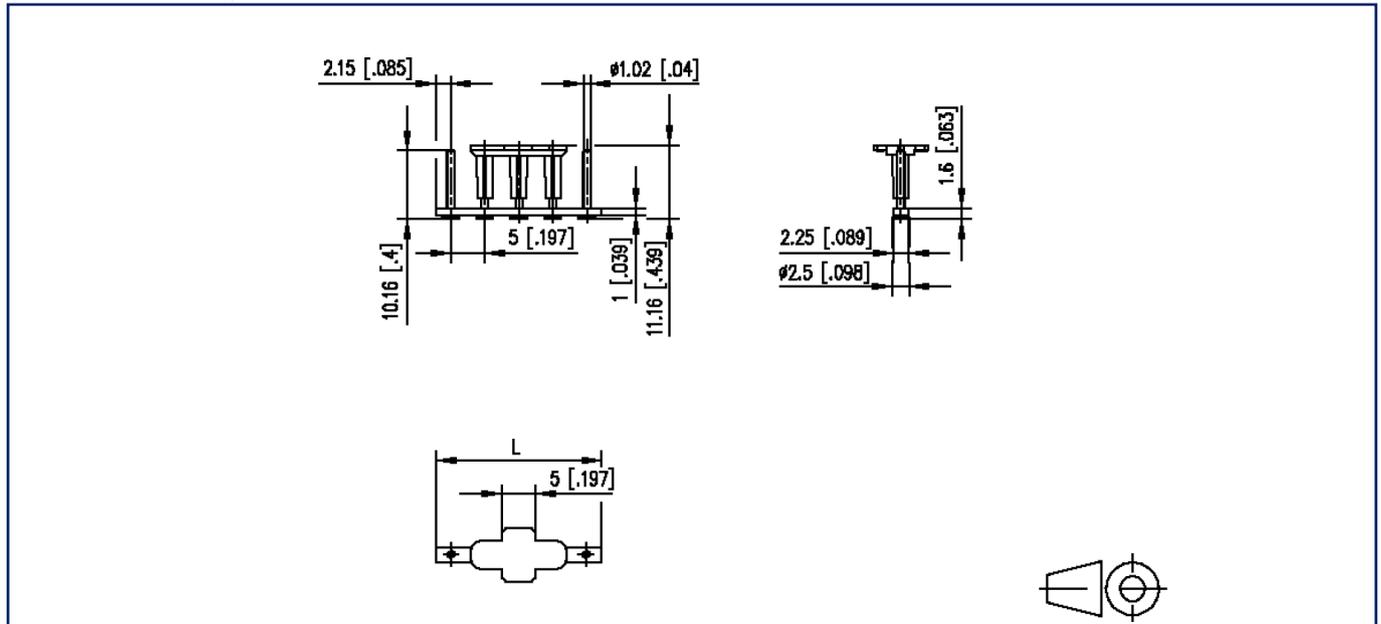

$L = (\text{pole size} - 1) \times \text{centerline} + 4.3 \text{ mm} [0.169]$

Data sheet  
**PM015xxVBHC Type 317**

Page 5/5

P/N  
**313171xx22**  
xx=number of poles  
2025/08/22  
Version: AW

**Illustrations**

PCB-Layout

