

Data sheet

Smart meter coupler RJ12/RJ12 unshielded


Page 1/5

P/N
1401A0APZ-E
EAN 4251394692883
2026/01/19

Illustrations



Dimensional drawing

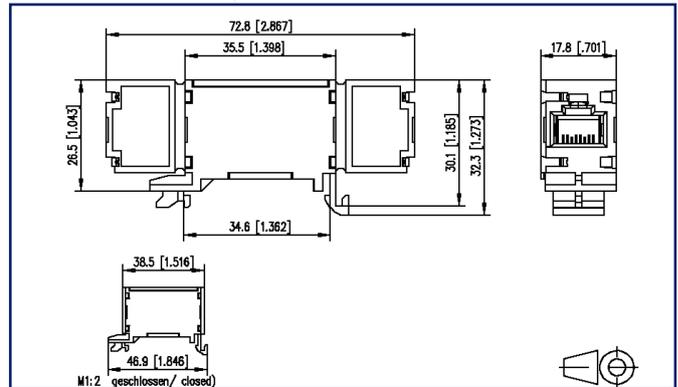

See enlarged drawings at the end of document

Product specification

- unshielded RJ12 Plug + Play solution with patch/patch design
- prevention of wiring errors
- one article for all applications (for DIN rail, meter cabinet or meter board)
- simple connection of smart meters with RJ12 patch cords
- application rule is implemented quickly and easily
- suitable for meter locations according to DIN VDE 0603-1
- transmission speed up to 10 Mbit/s
- housing in protection class 2



Smart meter coupler RJ12/RJ12 unshielded

P/N

1401A0APZ-E

EAN 4251394692883

2026/01/19

Technical Data

General Data

Fields of application	structured building cabling Distributed building services
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E2
Design	wall outlet
Shielding	unshielded
Transmission technology	Copper
Color	light gray - RAL 7035
Dimensions	
Dimension (L x W x H)	72.8 mm x 32.3 mm x 17.8 mm
Dimension (L x W x H)	2.866 in. x 1.272 in. x 0.701 in.

Transmission characteristics

Transmission rate up to 10 Mbit/s	IEEE 802.3i
-----------------------------------	-------------

Connections/interfaces

Connector technology interface 1	RJ12-jack
Connector technology interface 2	RJ12-jack
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Number of positions/contacts interface 1	6P/6C
Number of positions/contacts interface 2	6P/6C

Electrical/ optical properties

Current carrying capacity	max. 1 A at 60 °C
Rated voltage	max. 60 V DC
Contact resistance	max. 20 mOhm
Insulation resistance	min. 500 MOhm
Dielectric strength conductor-conductor (secondary)	min. 1000 V DC
Dielectric strength conductor-shield	min. 1500 V DC

Smart meter coupler RJ12/RJ12 unshielded

P/N

1401A0APZ-E

EAN 4251394692883

2026/01/19

Technical Data

Mechanical data

Insertion and withdrawal force	max. 20 N
Life - Number of mating cycles	min. 750
Position/mounting of latch standard installation position	top

Materials and material properties

Material - Housing	PA 66 UL V0
Material - Contact	Spring steel
Material - Contact finish	Ni + Au (nickel-gold)
Material - Protective cap	PA 66 UL V0
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Particulate ingress	IP2X
Liquid ingress/immersion	IPX0

Standards/Regulations

Generic cabling systems	
General requirements	ISO/IEC 11801-1 DIN EN 50173-1 ANSI/TIA-568.2-D
Connectors for electronic equipment - Tests and measurements	
Endurance tests	IEC 60512-9-3: 03-2009

Classifications

ETIM 9.0	EC001024
ETIM 10.0	EC001024

Data sheet

Page 4/5

Smart meter coupler RJ12/RJ12 unshielded

P/N

1401A0APZ-E

EAN 4251394692883

2026/01/19

Technical Data**Packing details**

Type of packaging 1 pc(s) / box

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Smart meter coupler RJ12/RJ12 unshielded

P/N

1401A0APZ-E

EAN 4251394692883

2026/01/19

Illustrations

Dimensional drawing

