

# Data sheet

## Modul module frame 3RU, 7HP 6 port stainless steel unequipped


P/N  
130B10E2E-E

EAN 4250184168225


2025/10/21

Version: W


### Illustrations

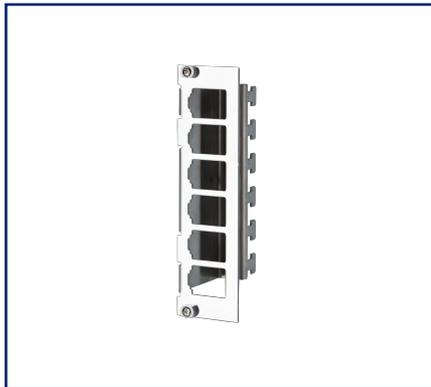

Dimensional drawing

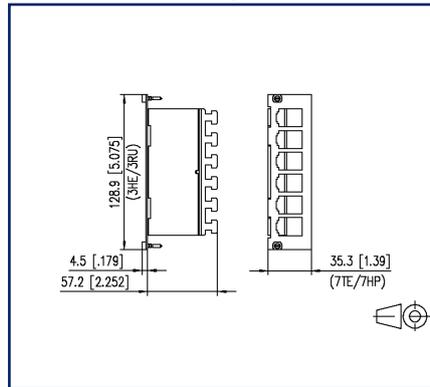

Cut-out

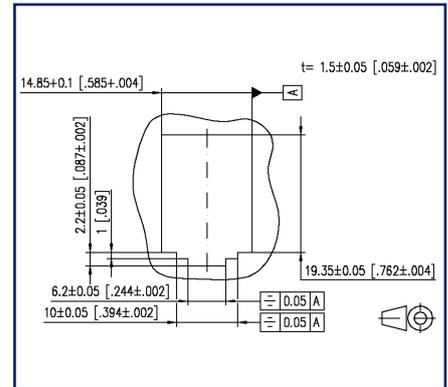

See enlarged drawings at the end of document

### Product specification

- stainless steel module frame for 6 individual modules in Modul design
- strain relief at the module
- 3RU 7HP module frame with very short dimensions
- mounts in OpDAT REGpro, OpDAT REGpro24, OpDAT CM, OpDAT REG S or 3HP module frame
- additional strain relief possible by cable tie
- grounding possible by flat plug



# Modul module frame 3RU, 7HP 6 port stainless steel unequipped

P/N  
130B10E2E-E

EAN 4250184168225

2025/10/21

Version: W

## Technical Data

### General Data

Fields of application	office areas
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	patch panel
Color	stainless steel
Dimensions	
Dimension (L x W x H)	57.2 mm x 35.3 mm x 128.9 mm
Dimension (L x W x H)	2.252 in. x 1.39 in. x 5.075 in.
Height unit	3RU
Horizontal pitch	7HP
Modularity	yes

### Connections/interfaces

Number of ports interface 1	6
Number of equipped ports interface 1	0
Number of ports interface 2	6
Number of ports interface 2 equipped	0
Ground connection	flat plug

### Mechanical data

Cut-out	MC module
strain relief	attached to module

### Materials and material properties

Material - Module support	stainless steel
Halogen free	yes
RoHS	compliant

**Modul module frame 3RU, 7HP 6 port stainless steel unequipped**P/N  
130B10E2E-E

EAN 4250184168225

2025/10/21

Version: W

**Technical Data****Environmental conditions**

Temperature (min. - max.)

Temperature - Storage °C -40 °C - 70 °C

Temperature - Storage °F -40 °F - 158 °F

Temperature - Operating °C -40 °C - 70 °C

Temperature - Operating °F -40 °F - 158 °F

**Classifications**

ETIM 7.0 EC001128

ETIM 8.0 EC001128

ETIM 9.0 EC001128

ETIM 10.0 EC001128

**Packing details**

Type of packaging 1 pc(s) / plastic bag

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



## Modul module frame 3RU, 7HP 6 port stainless steel unequipped

P/N  
130B10E2E-E

EAN 4250184168225

2025/10/21

Version: W

### Accessories

P/N	Designation
130898-00-I	BLIND module light gray
130898-00-RW-I	BLIND module pure white
130898-01-I	COAX modul F jack / F jack
130898-02-I	COAX modul IEC jack / F jack
130898-03-I	COAX modul IEC plug / F jack
130908-I-B1	UAE modul Cat.5e white
130909-I	UAE modul Cat.6 jack white
130910-DNV	E-DAT modul Cat.6 <sub>A</sub> 8(8) jack DNV
130910-I	E-DAT modul Cat.6 <sub>A</sub> 8(8) jack
130910-Z	E-DAT modul Cat.6 <sub>A</sub> 8(8) jack, (12 pcs)
1309A0-I	E-DAT modul coupler 8(8) 180° class E <sub>A</sub>
130A11-29-I	UAE modul 8(8) Cat.6 <sub>A</sub> black
130A11-I	UAE modul 8(8) Cat.6 <sub>A</sub> white
130B11-25-E	25Gmodul
130B11-25-Z	25Gmodul (12 pcs)
130B11-DNV	C6 <sub>A</sub> modul 180° jack DNV
130B11-E	C6 <sub>A</sub> modul 180° jack
130B11-Z	C6 <sub>A</sub> modul 180° jack (12 pcs)
15091001-I	OpDAT modul ST OS2
15091070-I	OpDAT modul LC (Ph-Br) MM beige
15091071-I	OpDAT modul LC-Duplex OS2
15091072-I	OpDAT modul LC-Duplex OM3
15091075-I	OpDAT modul LC-Duplex OM4
15091076-I	OpDAT modul LC-Duplex APC OS2
1509107B-I	OpDAT modul LC-Duplex MM

Data sheet

Page 5/6

**Modul module frame 3RU, 7HP 6 port stainless steel unequipped**

P/N

130B10E2E-E

EAN 4250184168225

2025/10/21

Version: W

**Accessories from**

P/N	Designation
15024A10-24-E	OpDAT REGpro24 housing without splice tray
15024A10-E	OpDAT REGpro housing without splice tray
15024A10S-E	OpDAT REGpro housing with splice tray and crimp splice holder
15024B10-E	OpDAT REG S for pre-terminated cables
15024B10S-E	OpDAT REG S for crimp splice holder
15024B10S-S	OpDAT REG S for shrink splice holder
1528SBGT19-E	OpDAT CM 19 inches/3RU subrack



Modul module frame 3RU, 7HP 6 port stainless steel unequipped

P/N  
130B10E2E-E


EAN 4250184168225

2025/10/21

Version: W

Illustrations

Dimensional drawing

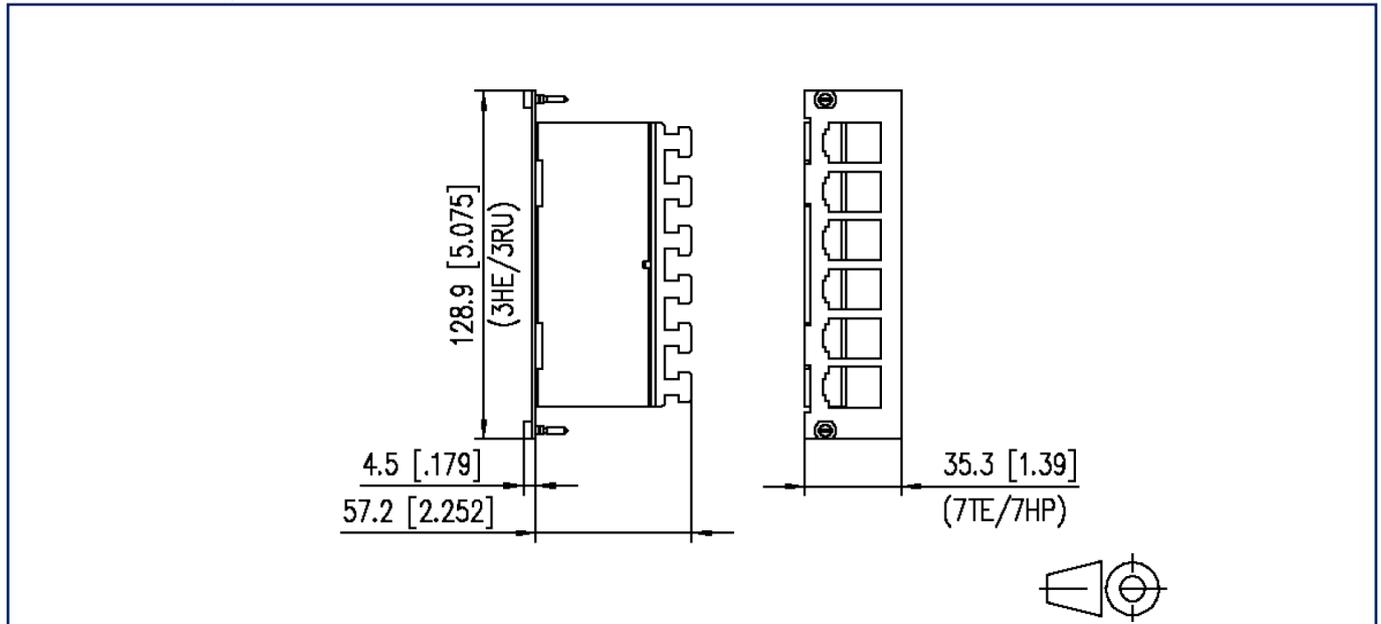

Cut-out

