


# Data sheet

## LF-F-DI230 LON


### Illustrations



Principle diagram

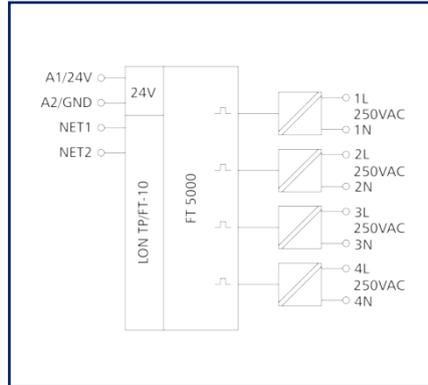

Wiring diagram

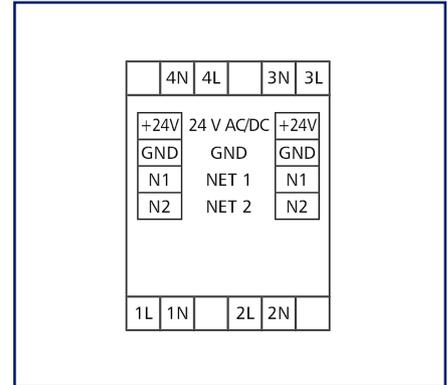

See enlarged drawings at the end of document

### Product specification

The LON module with 4 digital inputs was developed for decentralized switching tasks. It is suitable for detecting 230 V AC switch states, for example, switches or buttons for light control. The input terminals 1L to 4L are wired with 1N to 4N terminals to 230 V AC via switches or contacts. The inputs can be integrated individually or simultaneously by SNVT network variables. Suitable for decentralized mounting on DIN TH35 rail according to IEC 60715 in electrical distribution cabinets.

- Connection with spring clamp terminal blocks (push-in)



**Data sheet**  
**LF-F-DI230 LON**

**Technical Data**

<b>RS485 interface</b>	
Protocol	TP/FT-10, free topology
Neuron	FT5000
Data format	Standard network variables (SNVT)
Transmission parameters	
Transmission rate	78 Kbit/s
Line topology	2700 m / 64 nodes
Free topology	500 m / 64 nodes
Cabling	Twisted Pair
<b>Supply</b>	
Operating voltage	24 V AC/DC +/- 10 % (SELV)
Power consumption	
Power consumption AC (max.)	63 mA
Power consumption DC (max.)	24 mA
Duty cycle relative	100 %
Recovery time	550 ms
<b>Inputs</b>	
Digital inputs	4
Voltage input	230 V AC/DC
<b>Housing</b>	
Dimensions	
Dimension (W x H x D)	35 mm x 69.3 mm x 60 mm
Dimension (W x H x D)	1.378 in. x 2.728 in. x 2.362 in.
Weight	72 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance The maximum quantity of LON modules connected side-by-side is limited to 15 or to a maximum power consumption of 2 Amps (AC or DC) per connection to the power supply. For any similar block of additional modules a separate connection to the power supply is necessary.
Connection type	Spring clamp terminal blocks
Indicator	green and yellow LED

**Data sheet**  
**LF-F-DI230 LON**

Page 3/7

**P/N**  
**1108631370**  
**EAN 4251394620862**  
2026/02/03  
Version: K

**Technical Data**

**Terminal blocks**

Supply and bus

Terminal block	4-pole
Solid wire (AWG)	max. 1.5 mm <sup>2</sup> / max. 16 AWG
Stranded wire (AWG)	max. 1 mm <sup>2</sup> / max. 18 AWG
Wire diameter	min. 0.3 mm max. 1.4 mm

Module connection

Wire cross section solid	0.2 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 24-14
Wire cross section multi	0.25 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 24-12
Wire cross section with wire ferrule	0.25 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 24-16
Stripping length (min.)	8 mm

Protection circuit      Polarity reversal protection for DC operating voltage

**Material**

Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polycarbonat

**Protection category according to IEC 60529**

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

**Climatic Data**

Operating

Temperature - Operating °C	-5 °C - 55 °C
Temperature - Operating °F	23 °F - 131 °F
Relative humidity	max. 85 % non-condensing

Storage

Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

**Data sheet**  
**LF-F-DI230 LON**

Page 4/7

**P/N**  
**1108631370**  
**EAN 4251394620862**  
2026/02/03  
Version: K**Technical Data****Classifications**

ETIM 7.0	EC000688
ETIM 8.0	EC000688
ETIM 9.0	EC000688
ETIM 10.0	EC000688

**Software and additional documents**

Software and documentation Further documentation is available for free download at [www.metz-connect.com](http://www.metz-connect.com)

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



**Data sheet**  
**LF-F-DI230 LON**

Page 5/7

**P/N**  
**1108631370**  
**EAN 4251394620862**  
2026/02/03  
Version: K**Accessories**

<b>P/N</b>	<b>Designation</b>
110214	U10 USB Network Interface - TP/FT-10 Channel
110369	Terminal block Type 259
11056170	Power supply NG4-F 24 V DC
11087913	LF-FAM LON
31135104	Typ 135 RIACON 135_3.5




Data sheet  
**LF-F-DI230 LON**

Page 6/7


P/N  
1108631370  
EAN 4251394620862  
2026/02/03  
Version: K

**Illustrations**

Dimensional drawing

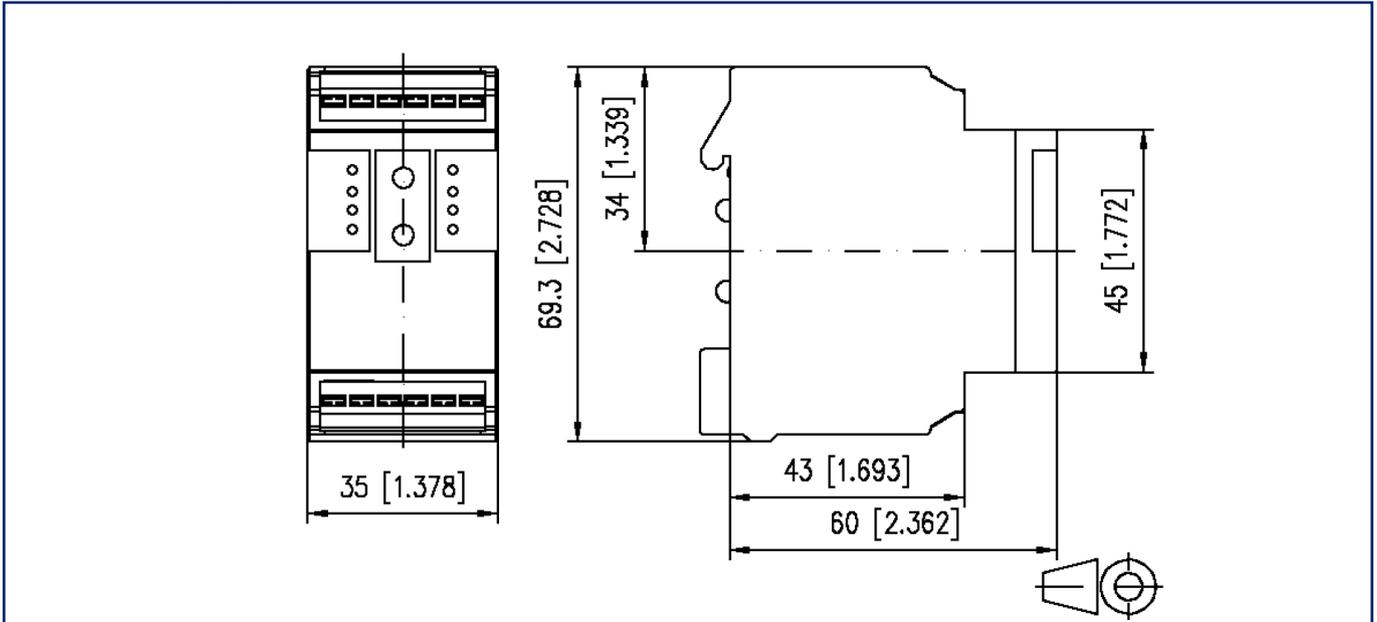

Wiring diagram

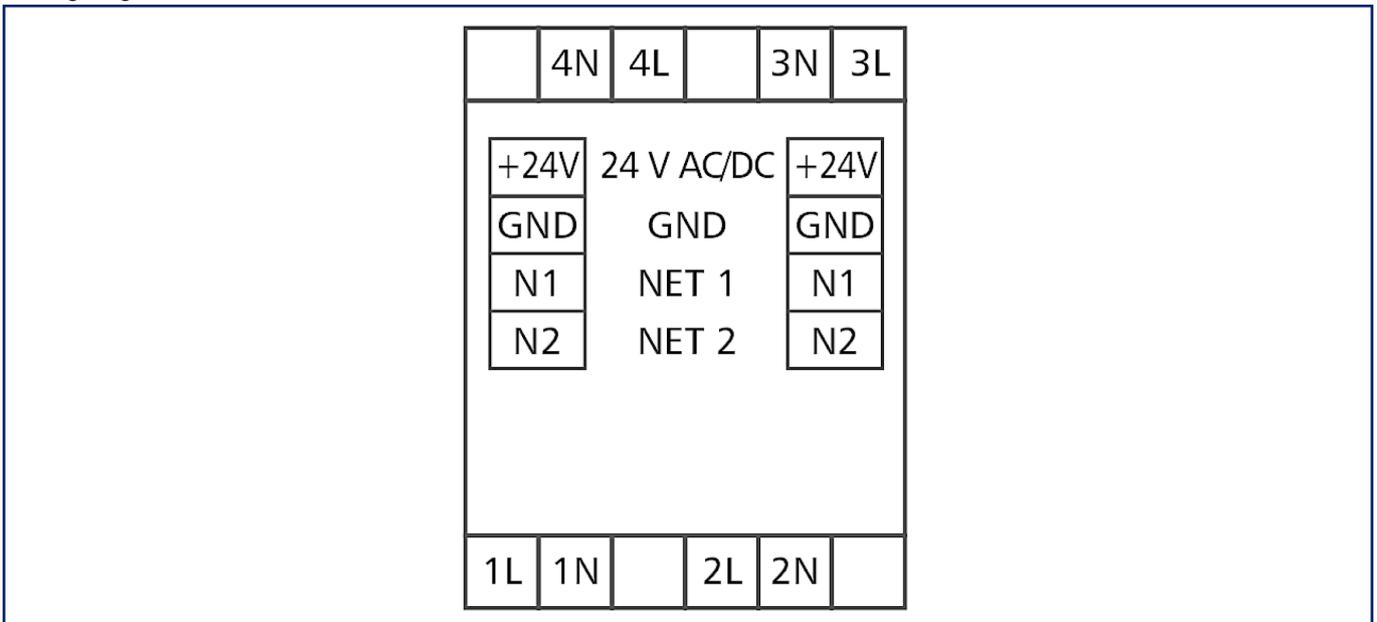

**Data sheet**  
**LF-F-DI230 LON**

Page 7/7

P/N  
1108631370  
EAN 4251394620862  
2026/02/03  
Version: K

**Illustrations**

Principle diagram

