

Data sheet

OpDAT slide² BO patch panel Prefab 24xLC-D OS2 gray

P/N


1504407424-E

EAN 4251394688657


2025/10/09

Version: B

Illustrations

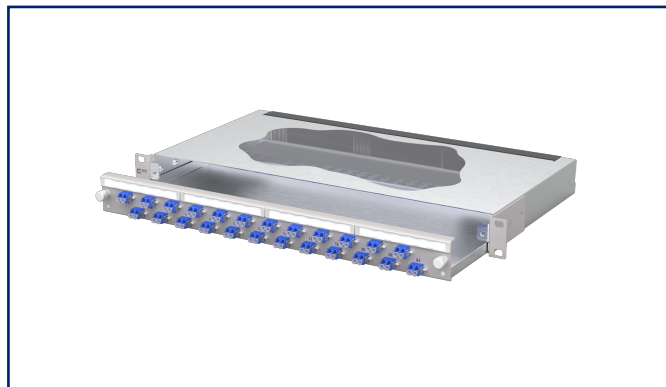

Dimensional drawing

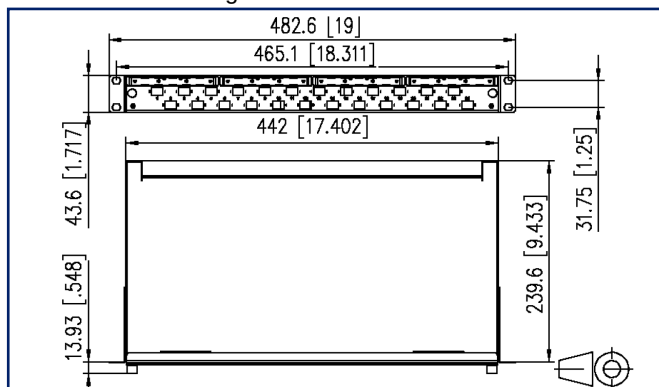

See enlarged drawings at the end of document

Product specification

- 19-inch, 1RU patch panel with pull-out drawer
- Equipped with 24xLC-D couplers
- Offset coupling arrangement for easy handling
- Tool-free metal bayonet catch for locking the drawer
- Drawer can be tilted and completely removed for easier installation (pull-out stop)
- Depth adjustable by 30 mm
- Front panel with labelling field
- Front panel powder-coated in gray RAL 7035
- Cable guide through brush strip
- Double strain relief by fixing with two cable ties
- Prepared for the installation of pre-assembled cables



Data sheet

Page 2/5

OpDAT slide² BO patch panel Prefab
24xLC-D OS2 gray

P/N

1504407424-E

EAN 4251394688657

2025/10/09

Version: B

Technical Data
General Data

Fields of application	data center office areas structured building cabling interior Distributed building services
Features variant	Prefab
Design	Eithdrawable
Mounting style	screwable
Transmission technology	Fiber optic
Port numbering	yes
Color housing	metal
Color front plate	RAL 7035 - light gray
Adapter color	blue
Dimensions	
Dimension (L x W x H)	254 mm x 483 mm x 44 mm
Dimension (L x W x H)	10 in. x 19.016 in. x 1.732 in.
Inches	19 inches
Height unit	1RU
Installation depth	240 mm
Installation depth	9.449 in.
Fiber class	OS2
Mode type of the fiber	Singlemode
Shape	UPC (Ultra Physical Contact)
Labeling option	label strip / labeling strip

Connections/interfaces

Adapter type	LC-D
Adapter interface outside	LC-D
Adapter interface inside	LC-D
Number of adapters	24
Number of breakouts front panel	24
Cable access/outlet	Brush strip



Data sheet

Page 3/5

OpDAT slide² BO patch panel Prefab 24xLC-D OS2 gray

P/N

1504407424-E

EAN 4251394688657

2025/10/09

Version: B

Technical Data

Mechanical data

Cut-out	SC-S/LC-D/E2000-S
strain relief	Double strain relief by fixing with two cable ties

Materials and material properties

Material - Housing	sheet steel
Material - Housing finish	Zn (zinc)
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics

Standards/Regulations

FO connector interfaces	LC - IEC 61754-20
-------------------------	-------------------

Classifications

ETIM 8.0	EC001130
ETIM 9.0	EC001130
ETIM 10.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

**OpDAT slide² BO patch panel Prefab
24xLC-D OS2 gray**

P/N

1504407424-E

EAN 4251394688657

2025/10/09

Version: B

Accessories

P/N	Designation
15090502-I	Blind cover LC-Duplex/SC-Simplex/E2000-Simplex black
15090552-I	Blind cover SC-Duplex/LC-Quad/ST-Duplex black



Data sheet

Page 5/5

OpDAT slide² BO patch panel Prefab 24xLC-D OS2 gray

P/N

1504407424-E

EAN 4251394688657

2025/10/09

Version: B

Illustrations

Dimensional drawing

