

Data sheet

OpDAT pre-assembled splice tray 12xLC UPC OS2

Page 1/5

P/N


150929JO00-E

EAN 4250184174448


2026/03/06

Version: AJ

Illustrations

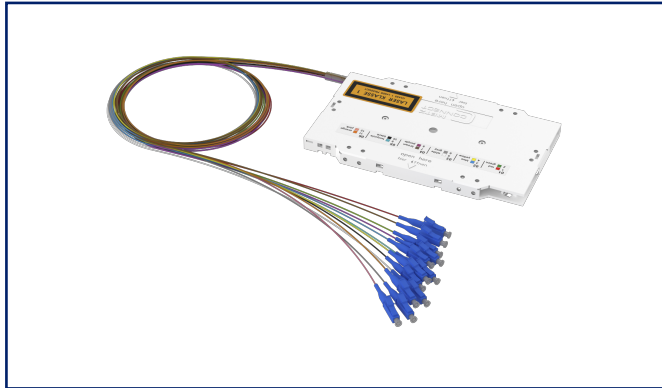

Dimensional drawing

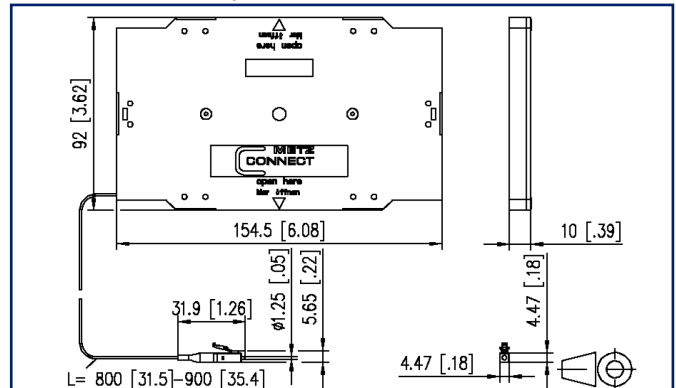

See enlarged drawings at the end of document

Product specification

- pre-assembled splice tray equipped with 12 pigtailed LC connectors
- suitable to be mounted in the following fiber optic patch panels: OpDAT fix, OpDAT slide, OpDAT PF and OpDAT PA
- standard splice tray (154.50 x 92 x 10 mm) equipped with crimp splice holder and cover
- 12 semi-tight buffered pigtailed LC connectors inserted and stripped
- assorted pigtail colors according to IEC 60304, primary and secondary coating in the same color
- with test report, insertion loss and return loss tested at 100 %
- lengths of the pigtailed LC connectors starting from tray are layered between 80 and 90 cm
- variants: available with fiber types OS2, OM5, OM4, OM3



OpDAT pre-assembled splice tray 12xLC UPC OS2

P/N

150929JO00-E

EAN 4250184174448

2026/03/06

Version: AJ

Technical Data

General Data	
Fields of application	data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	pre-assembled splice tray
Transmission technology	Fiber optic
Color	blue
Dimensions	
Dimension (L x W x H)	92 mm x 154.5 mm x 10 mm
Dimension (L x W x H)	3.622 in. x 6.083 in. x 0.394 in.
Mode type of the fiber	Singlemode
Fiber class	OS2 (ISO/IEC 11801/EN50173 & IEC 60793-2-50 B1.3, B6_a & ITU-T G.657.A1, G.652.D)
Cable Type	pigtail(s)
Number of cables/ buffered fibers	12
Number of fibres each cable/ wire	1
Shape	UPC (Ultra Physical Contact)
Fiber construction	9/125 µm
Minimum length	0.8 m
Minimum length	2.62 ft
Maximum length	0.9 m
Maximum length	2.95 ft
Connections/interfaces	
Connector technology interface 2	LC UPC
Optical characteristics	
Insertion loss	max. 0,3 dB
Return loss	min. 50 dB

Data sheet

Page 4/5

OpDAT pre-assembled splice tray 12xLC UPC OS2

P/N

150929JO00-E

EAN 4250184174448

2026/03/06

Version: AJ

Accessories from

P/N	Designation
1502000200-E	OpDAT PF 1HE Patchfeld festeinbau für 24xSC/LC-D, unbestückt
1502007300-E	OpDAT PF patch panel for 24xLC-D/SC-S/E2000-S
1502200200-E	OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray
1502507300-E	OpDAT fix patch panel for 24xLC-D/SC-S/E2000

OpDAT pre-assembled splice tray 12xLC UPC OS2

P/N

150929J000-E

EAN 4250184174448

2026/03/06

Version: AJ

Illustrations

Dimensional drawing

