


# Data sheet

Page 1/4


## OpDAT universal cable 1x24 OM4 class C<sub>ca</sub>

P/N  
150U0247C240D  
EAN 4251394687193  
2025/06/12  
Version: B

### Illustrations

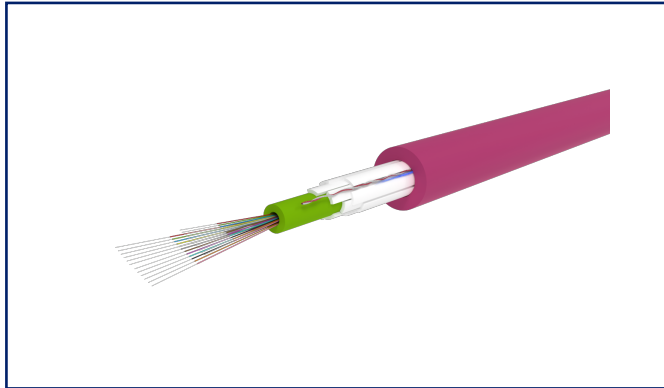

Principle diagram

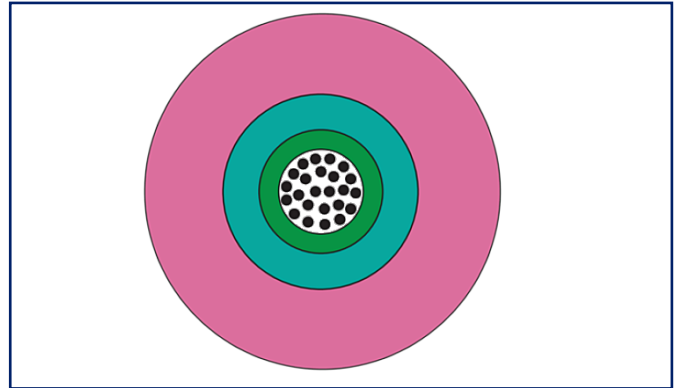

See enlarged drawings at the end of document

### Product specification

- installation cable U-DQ(ZN)BH
- Universal fibre optic cable for indoors/outdoors with double tube construction and central tube (up to 24 fibres)
- bend insensitive fiber
- UV-resistant, metal-free, longitudinally waterproof, tensile strength and rodent repellent
- cable jacket: LSHF (FireRes®)
- cable construction: filled double loose tubes, optimum fibre distribution
- cable diameter for central loose tube 7.5 mm with 24 fibers per loose tube
- strain relief: longitudinally waterproof wrapping, glasroving elements
- for laying in ducts or directly in the ground in a suitable layer of sand
- applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-1, EN 187000
- fire behaviour: class C<sub>ca</sub>- s1a, d1,a1 (classification acc. to EN 13501-6)
- all available variants can be created with the configurator



# OpDAT universal cable 1x24 OM4 class C<sub>ca</sub>

P/N  
150U0247C240D  
EAN 4251394687193  
2025/06/12  
Version: B

## Technical Data

### General Data

Fields of application	interior structured building cabling
Transmission technology	Fiber optic
Color coding fiber/ wire(s)	IEC 60304
Mode type of the fiber	Multimode
Fiber class	OM4
Cable Type	Universal cable
Number of cables/ buffered fibers	24
Number of fibres each cable/ wire	24
Weight	73 kg/km

### Geometric characteristics

Outer diameter cable jacket (mm)	7.5 mm
Outer diameter cable jacket (inch)	0.295 in.

### Mechanical data

strain relief	central tension element
Tensile strength during operation	1000 N
Maximum installation load (max.)	3000 N
Maximum installation load	75 mm
Maximum operating bending radius	150 mm
Impact resistance	20 Nm
Crush (compressive strength)	3000 N/100 mm
Torsion resistance	5 cycles ± 1 rotation
Fire load	1123 MJ/km

### Materials and material properties

Rodent protection	rodent repellent
Halogen free	yes
Metal-free	yes
UV-resistance	yes

**OpDAT universal cable 1x24 OM4 class C<sub>ca</sub>**

P/N  
**150U0247C240D**  
**EAN 4251394687193**  
 2025/06/12  
 Version: B

**Technical Data**

**Environmental conditions**

Temperature (min. - max.)	
Temperature - Storage °C	-30 °C - 60 °C
Temperature - Storage °F	-22 °F - 140 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Temperature - Installation °C	-15 °C - 60 °C
Temperature - Installation °F	5 °F - 140 °F

**Standards/Regulations**

Common test methods for cables under fire conditions

Fire behaviour - class (EN 50399)		Cca
-----------------------------------	--	-----

**Classifications**

ETIM 7.0	EC000034
ETIM 8.0	EC000034
ETIM 9.0	EC000034

**Packing details**

Type of packaging	1 pc(s) / drum
-------------------	----------------

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 4/4

OpDAT universal cable 1x24 OM4 class C<sub>ca</sub>

P/N

150U0247C240D

EAN 4251394687193

2025/06/12

Version: B

## Illustrations

Principle diagram

