

Data sheet

OpDAT adapter SC-Simplex APC OS2 with shutter

Page 1/5

P/N

1509001H-I

EAN 4251394603094


2025/09/18

Version: I

Illustrations



Dimensional drawing

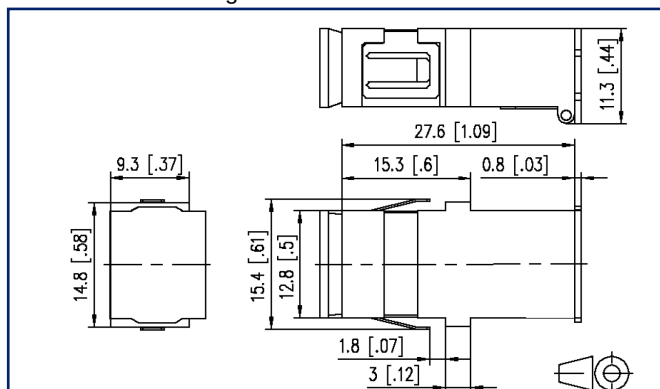

See enlarged drawings at the end of document

Product specification

- SC simplex plastic adapter with metal clip
- slotted ceramic guide sleeve for single mode applications
- with a laser protection shutter and dust protection cap
- high material stability, surface quality and durability
- durability min. 1000 mating cycles with a ceramic guide sleeve
- variants: blue (SM) or green (SM APC)



Data sheet

Page 2/5

OpDAT adapter SC-Simplex APC OS2 with shutter

P/N

1509001H-I

EAN 4251394603094

2025/09/18

Version: I

Technical Data

General Data

Fields of application	structured building cabling fiber to the desk data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	coupler / adapter (FO)
Color	green
Dimensions	
Dimension (L x W x H)	27.6 mm x 14.8 mm x 9.3 mm
Dimension (L x W x H)	1.087 in. x 0.583 in. x 0.366 in.
Mode type of the fiber	Singlemode
Shape	APC (Angled Physical Contact)

Connections/interfaces

Connector interfaces	SC
----------------------	----

Mechanical data

Cut-out	SC, LC-D, E2000
Connector type	simplex
Life - Number of mating cycles	min. 1000

Materials and material properties

Material - Housing	Plastics
Material - Sleeve	ceramic, slotted
Halogen free	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 80 °C
Temperature - Storage °F	-40 °F - 176 °F
Temperature - Operating °C	-40 °C - 80 °C



Data sheet

Page 3/5

OpDAT adapter SC-Simplex APC OS2 with shutter

P/N

1509001H-I

EAN 4251394603094

2025/09/18

Version: I

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Operating °F -40 °F - 176 °F

Standards/Regulations

Fibre optic connector interfaces SC - IEC 61754-4

Classifications

ETIM 7.0 EC000752

ETIM 8.0 EC000752

ETIM 9.0 EC000752

ETIM 10.0 EC000752

Packing details

Type of packaging 1 pc(s) / plastic bag

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

OpDAT adapter SC-Simplex APC OS2 with shutter

P/N

1509001H-I

EAN 4251394603094

2025/09/18

Version: I

Accessories from

P/N	Designation
14040000-E	MCO IP69k protective housing for outdoor use, set for exposed installation
14040010-E	MCO IP69k Protective housing for outdoor use, set with mounting bracket
14040100-E	MCO IP69k Protective housing for outdoor use, set wall/ housing bushing
1501100000HS	OpDAT ADT for 4xSC/2xLC-D, unequipped
1501101H02HS	OpDAT ADT VIK 2xSC APC (ceramic, green) with laser protection
1501191H02HS	OpDAT ADT splice 2xSC APC (ceramic, green) with laser protection, pigtails OS2 placed and stripped



Data sheet

Page 5/5

OpDAT adapter SC-Simplex APC OS2 with shutter

P/N

1509001H-I

EAN 4251394603094

2025/09/18

Version: I

Illustrations

Dimensional drawing

