

Fiber In The Home –

Your way to fast Internet



Our strengths – your benefit

Your fiber optic connection – Instructions for preparation

2



Only 3 steps to a ready connection!

Fiber In The Home - What does that actually mean? It is the English translation for fiber optics in the home, and as such, the technology of the future when it comes to the basis for fast data connection. But what do you need to do in order to use fiber optics in your house or apartment? The following brochure will help you and your electrician to create the necessary conditions.

1. Network owner

In the course of network expansion, the network owner (municipality or association established for a special purpose) has laid a fiber optic line to your house. That's why you have concluded a house connection with the network owner. The line ends, for example, in your cellar with the house transfer point APL.

2. Customer/Owner – What do you need to do?

In order for the network operator to eventually send a signal into your living space, it's up to you to provide the specific cabling.

This means for a

> One family house: the network terminal device provided by the operator located near the APL requires a power connection. If your house already has a network cabling, you can immediately use this for your advantage. Otherwise, you will find cabling suggestions in this brochure.


> Multi-family dwelling: installation of a fiber optic distributor in the cellar and the installation of fiber optic cables up to individual apartments, ending at the respective flat entry point.

3. Network operator (Provider)


As soon as steps 1 and 2 are completed, i.e. the house connection is finished and the cabling is in place, you can make an appointment with the network operator. The prerequisite for this is a concluded signal supply contract. A technician sets the network terminal device, which then supplies your router and your terminal devices with fast Internet.

Single family house

4

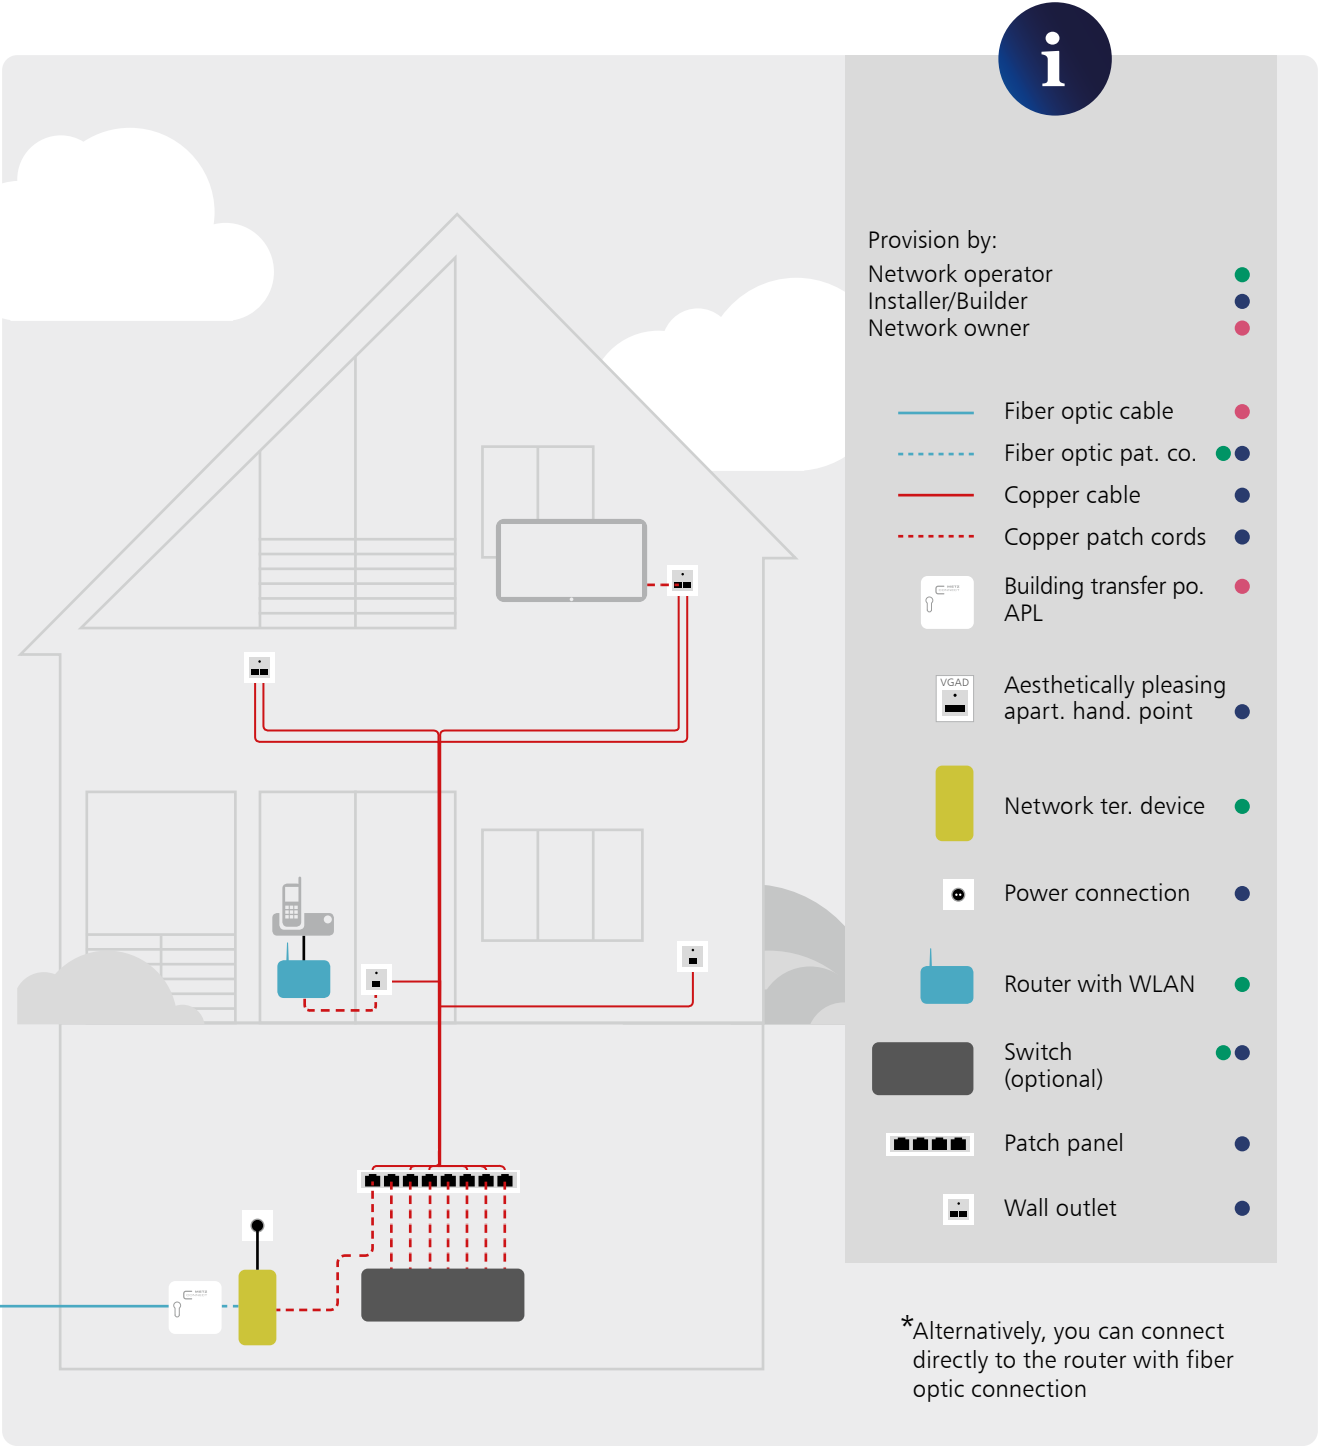


Single family house with self-contained apartment

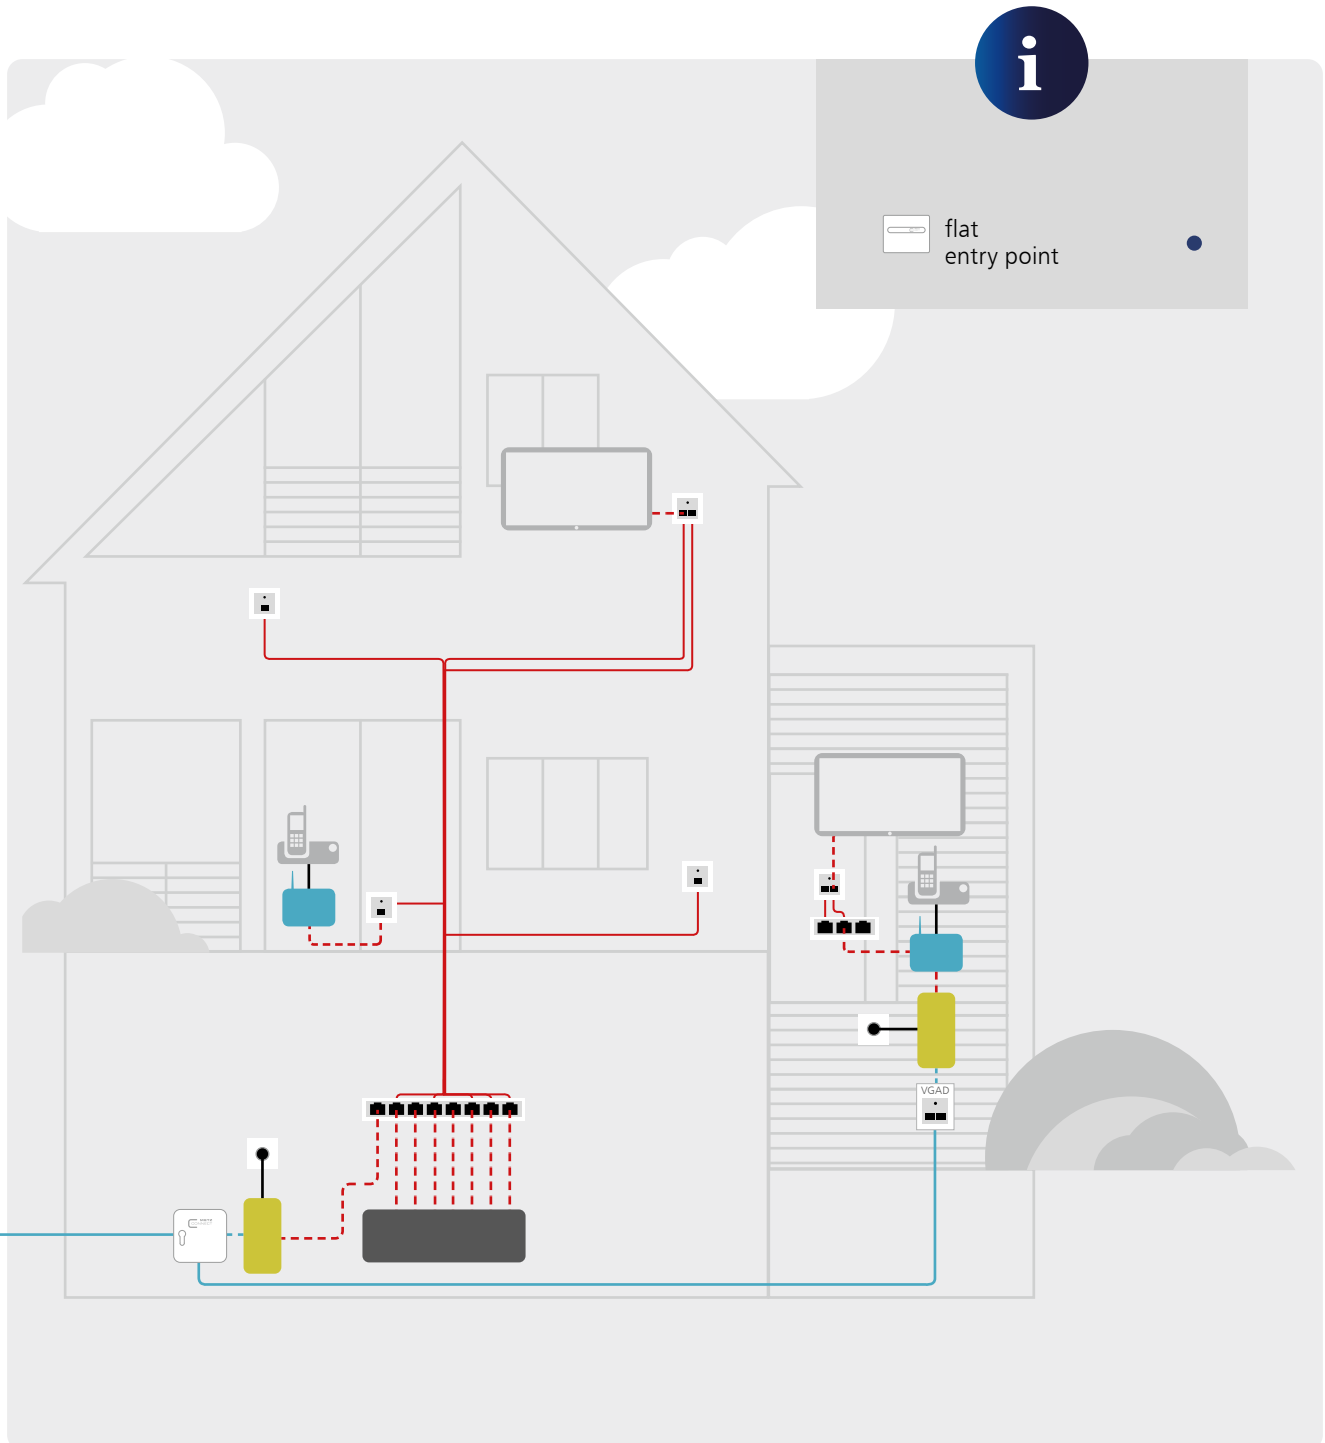


Multi-family house

6


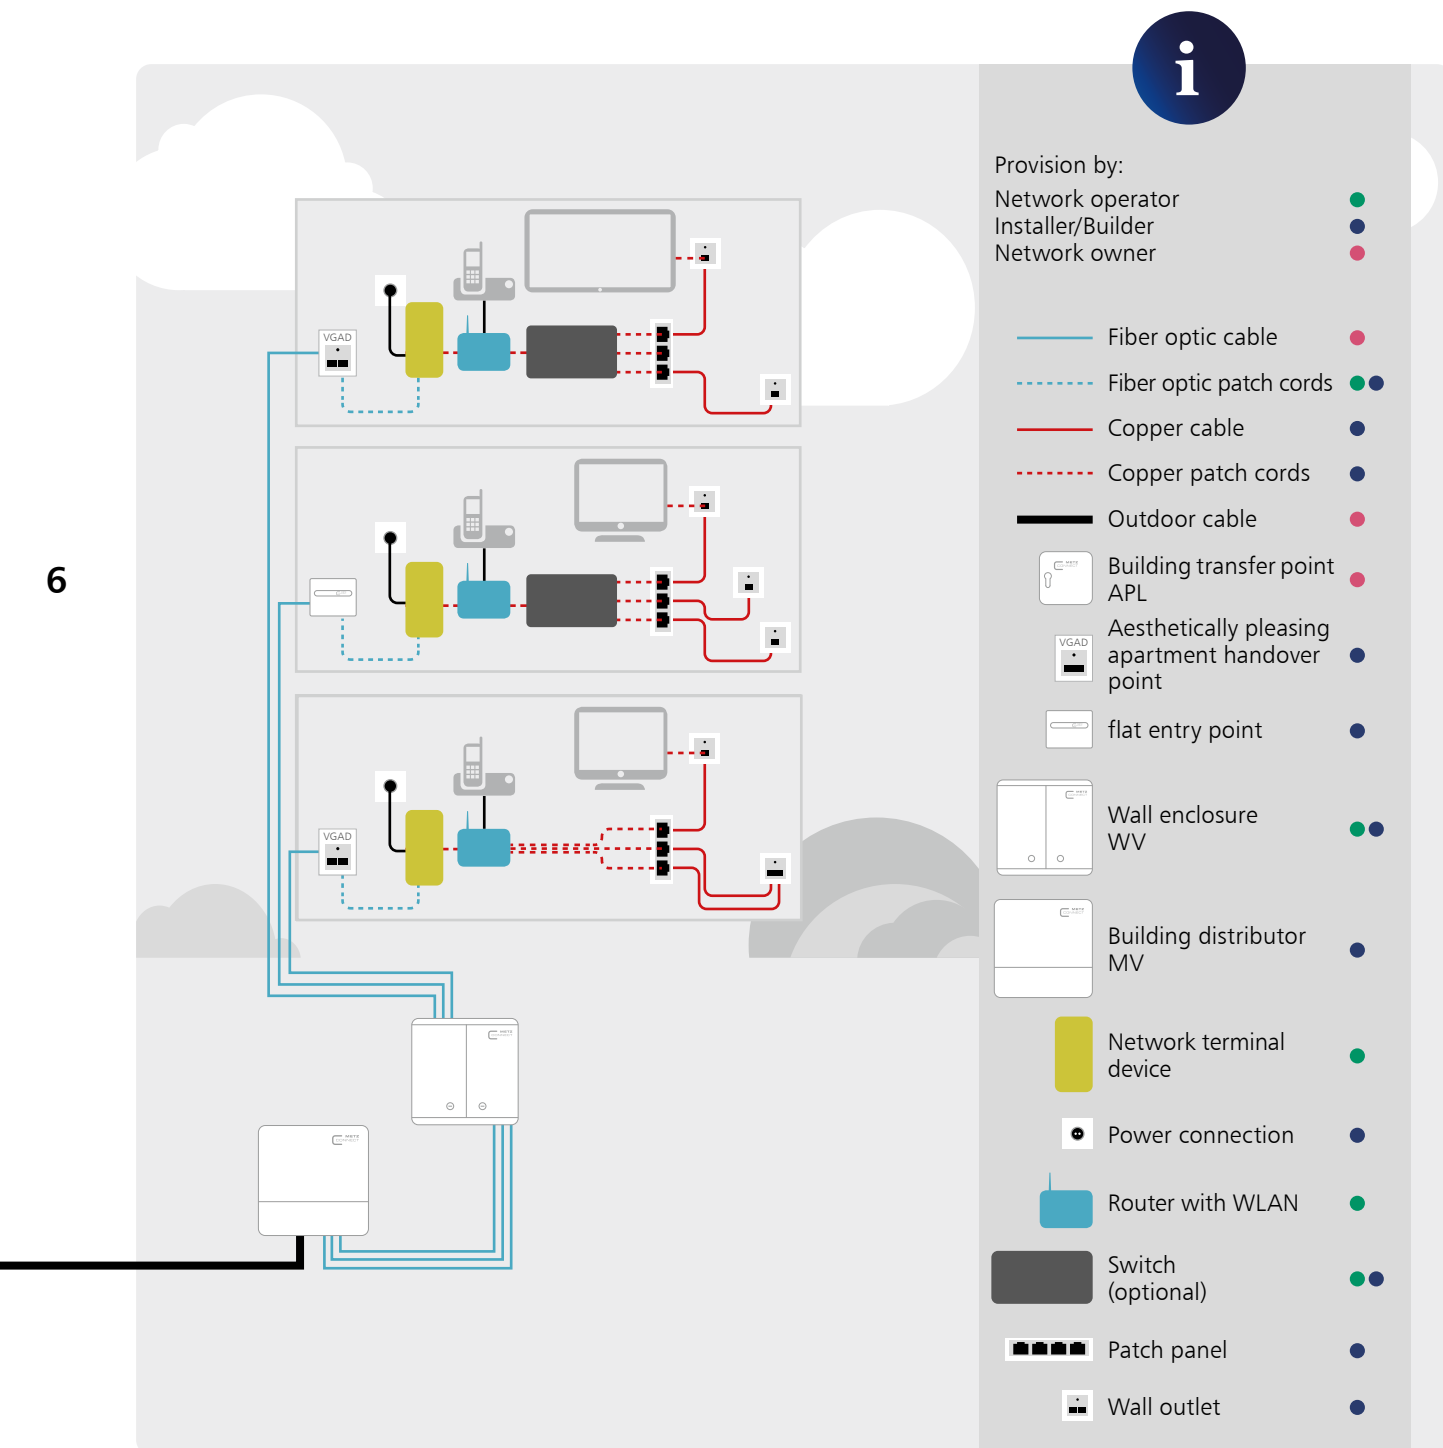



Properties with two or more houses

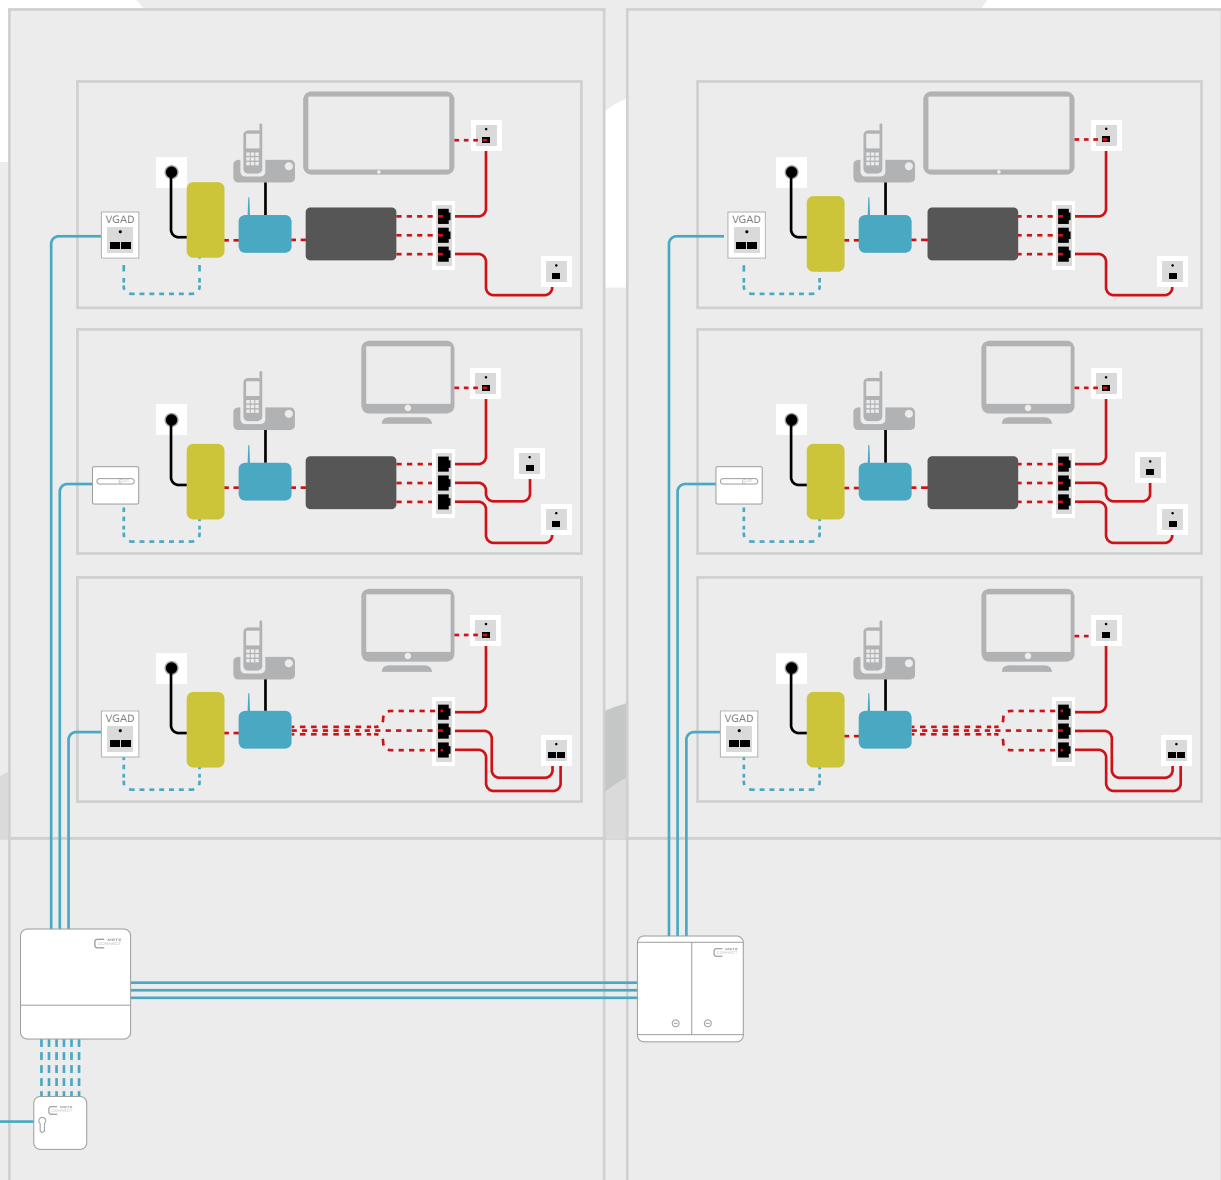

Once installed – enjoy unlimited freedom!

Fiber optic components

	Description	METZ CONNECT	Provider	Installer	Network owner
	Building transfer point OpDAT APL The building transfer point connects the external fiber optic cable with the internal cabling	1501597GXXHC 1501591HXXHC			
	Flat entry point without cable drum (ADT) Without cable, suitable for VIK, for up to 4 fibers prepared	1501107G02HC			
	Flat entry point with cable drum WÜP/OpDAT VGAD Connection from apartment to fiber optic distributor, with open end for splicing or assembled on both sides	150C049HKxxxE 150F049HK00xxE			
	Wall distributor OpDAT WV (apartment building) Serves as a central floor splice distributor for forwarding the fiber optic cables to the apartments	1503397AXX-C			
	Aesthetically pleasing apartment handover point with cable spool WÜP/OpDAT Connection from the apartment to the fiber optic distribution point, with an open end for splicing or pre-terminated at both ends. Fully design-compatible – compatible with the central inserts and cover plates from leading switch manufacturer ranges.	150C049DK00xxE 150F049DK00xxE			
	Building distributor OpDAT MV Is a universally applicable distributor for floor cabling or as a house distribution point in the equipment room	1503600RJ00-E 15036C97609-E 15036C97612-E			
	Network terminal device (NAG) The network terminal device converts a fiber optic technology to a copper technology. A power connection is necessary. Connection to the building transfer point via the fiber optic patch cords.	-			
	Internet router Interface between your own network and the Internet. With a WLAN function. Recommended: AVM FRITZ!Box 7490 4 x LAN, WLAN, AC + N, ISDN, DECT	-			
	Switch (copper 10 MB/100 MB/1 GB) Duplicates the network connections from the router and controls the communication in the network; it is required if more than three terminal devices are to be connected	-			
	WLAN repeater Can be optionally used if the WLAN range is not sufficient	-			

	Description	METZ CONNECT	Provider	Installer	Network owner
	Fiber optic patch cable For connection of the house transfer point or network termination device. Length available from 0.2 to 10 m.	151P7AJAxxE	●	●	
	Pre-assembled Installation cables (VIK) For connection of the apartment transfer point. 4 fibers, ready mounted with connectors on both sides. Length available from 5 to 200 m.	152C049KK0xxxE		●	
	Universal cable For outdoor installation such as building connection. Without connector, number of fibers between 4 and 48	150UXXX9E120M 150UXXX9C120D		●	
	Mini breakout cable compact Suitable for cable laying in the house, without connector, 4 fibers	150C0049D010M		●	
	FITH cable Suitable for cable laying in the house, without connector, 4 fibers	150F0049B040M		●	
	Fibre optic tool bag, complete the most common tools for the preparation of optical fibers and fiber optic cables	150800200-E			
	Fiber optic cleaning case All necessary means for dry cleaning and subsequent inspection of fiber optic connectors	150800100-E			
	OpDAT FAST™ Hybrid LC APC field-terminable fiber optic connector; for cables and fibers	1509QAJA010C-E			


Practical examples

Make sure there is sufficient space for your installation.
Consult your installer!

Network terminal device



Patch panel module
AP housing 16 port

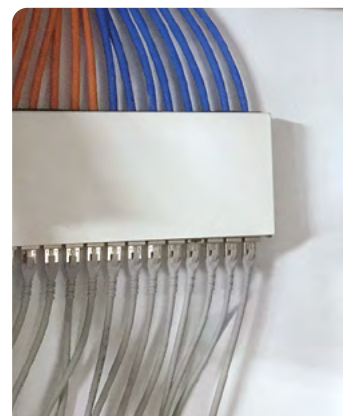



For a smooth data flow in the building

Copper Components

	Description	METZ CONNECT	Provider	Installer
	Ethernet installation cable MC GC1300 pro22 Cat.7A S/FTP 4P LSHF-FR 500 m Fire performance: class D _{ca} s2 d2 a1, suitable for 10 Gigabit Ethernet	simplex 1308427B34141 duplex 1308427B34143		●
	Flush-mounted wall outlet with one or two RJ45 jacks E-DAT C6 _A UP IDC Suitable for up to 10 Gigabit Ethernet, pure white RAL 9010 & traffic white RAL 9016	1 x RJ45 pure white 130D371002-I 1 x RJ45 traffic white 130D371027-I 2 x RJ45 pure white 130D381002-I 2 x RJ45 traffic white 130D381027-I		●
	Surface-mounted wall outlet with one or two RJ45 jacks E-DAT C6 _A AP IDC Suitable for up to 10 Gigabit Ethernet, pure white RAL 9010 & traffic white RAL 9016	1 x RJ45 pure white 130D370002-I 1 x RJ45 traffic white 130D370027-I 2 x RJ45 pure white 130D380002-I 2 x RJ45 traffic white 130D380027-I		●
	Network connection unit for DIN rails Mounting for installation in the switch cabinet REGplus incl. C6 _A module 180°M Suitable for up to 10 Gigabit Ethernet	130B117003-E		●
	Module AP housing 6/12/16, unequipped	130861-0602-E		
	Module housing surface-mounted unequipped for single modules in a module design, pure white	130861-1202-E 130861-1602-E		●
	Multimedia distributor 12; 16; 24 Port Module frame empty to hold data, KOAX- and fiber optic modules, mounting types: module	130927-1200-E 130927-1600-E 130927-2400-E		●
	C6 _A modul 24 Port 180°M 1 RU 19 inch 1 RU module frame incl. 24 single modules C6 _A modul 180° suitable for 10 Gigabit Ethernet	130B11P0-E		●

	Description	METZ CONNECT	Provider	Installer
	KOAX connector for installation in module AP housing KOAX modul F-socket/F-socket Coax connector with adapter in module design, suitable for module applications. For installation in module AP housing and network socket.	130898-01-I		●
	C6Amodul 180° Jack Modular Cat.6A connector unit RJ45 for 10 Gigabit-Ethernet. For installation in module AP housing and network socket.	130B11-E		●
	Patch cords Cat.6A AWG 26 0.5 m Suitable for 10 Gigabit Ethernet, available in various colours and lengths from 0.5 up to 20 m	1308450588-E		●
	Patch cords Cat.6 Ultraflex500 VoIP AWG 26 0.3 m Especially suitable for unshielded and shielded Class E _A systems, available in white, grey and black and lengths from 0.3 to 20 m	13084U0333-E		●
	RJ45 connector suitable for field assembly C6A RJ45 field plug pro Direct connection, e.g. access point camera, suitable for 10 Gigabit Ethernet	130E405032-E		●
	IP44 surface-mounted modular housing with hinged cover and lock Particularly suitable for use in roofed outdoor areas, in damp rooms or in indoor areas subject to heavy mechanical stress. Available in pure white and gray	pure white 1309470002-I gray 1309470003-I		●
	Module flush-mounted housing with hinged cover and lock Particularly suitable for use in roofed outdoor areas, in damp rooms or in indoor areas subject to heavy mechanical stress. Available in pure white and gray	pure white 1309471002-I gray 1309471003-I		●
	Smart Meter Coupling RJ45/RJ45 shielded METZ CONNECT offers innovative plug & play smart metering couplers for secure and flexible data transmission in modern meter cabinets. Unpack, snap on, plug in – done. The RJ45 coupler for secure, fast, and easy cabling.	140120APZ-E		●
	RJ45 field plug – ultra short As one of the shortest field assembly RJ45 connectors in its class, it offers the ideal solution for applications where standard connectors reach their limits.	130E507032-E		●

Building transfer point

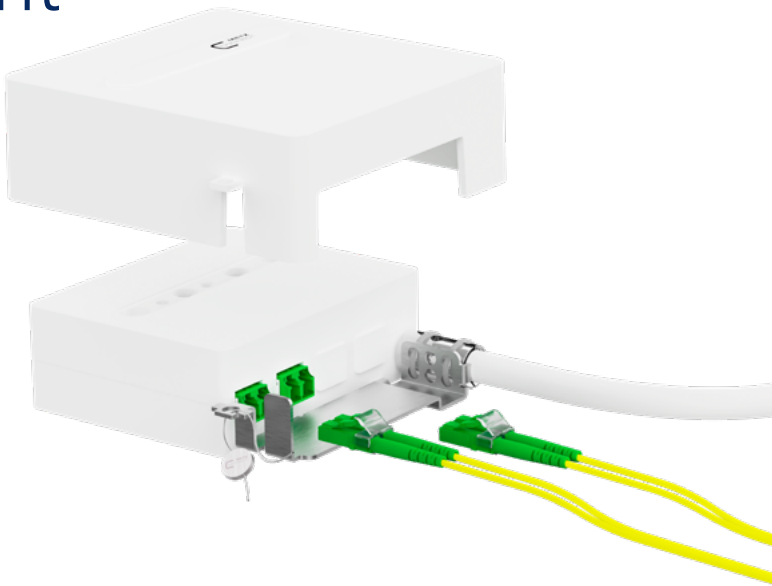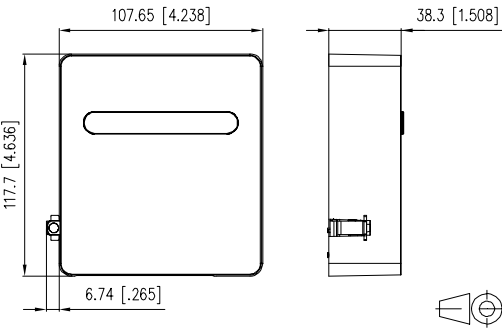

OpDAT APL

Part number	Color	Variant 1	Variant 2
1501597G02HC	pure white RAL 9010	2 x LC-D APC (OS2)	Surface mount
1501597G04HC	pure white RAL 9010	4 x LC-D APC (OS2)	Surface mount
1501591H04HC	pure white RAL 9010	4 x SC-S APC (OS2)	Surface mount

Main features


- > compact termination point in minimalist design
- > accommodates microducts with a diameter of up to 10 mm
- > suitable for up to 2 x LC Duplex, 4 x SC Simplex or 4 x E2000 Simplex adapters
- > sealable and tamper-proof due to safety screw
- > prepared for splicing incoming fibers to pigtails
- > all singlemode adapters are equipped with laser shutters
- > unused openings are sealed with blind plugs
- > splice tray incl. Shrink splice protection
- > easy installation due to foldable and removable splice tray
- > space for fiber reserve available
- > mountable as surface mount housing
- > break-out latches for vertical and horizontal and horizontal mounting on DIN rail systems
- > dimensions (W x H x D): 108 x 118 x 39 mm

Flat entry point with a cable drum

Figure: variant Plug-In



Configurator

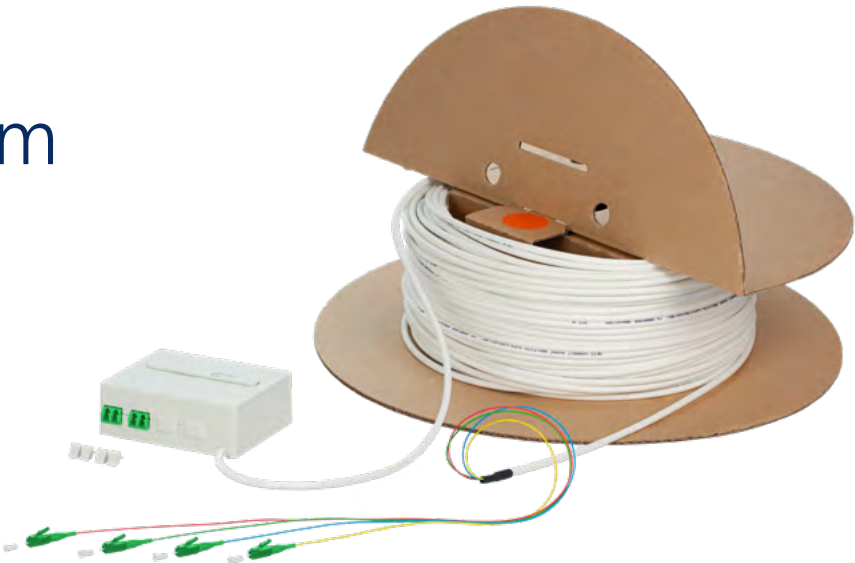

OpDAT VADT

Part number	Color	Length	Variant
150C049HK0030E	white	30 m	Wall outlet with 4 x LC APC – Variant Splice
150C049HK0050E	white	50 m	Wall outlet with 4 x LC APC – Variant Splice
150C049HK00A0E	white	100 m	Wall outlet with 4 x LC APC – Variant Splice
150C049HKK330E	white	30 m	Wall outlet with 4 x LC APC both sides pull-out aid – Compact version Plug-In
150C049HKK350E	white	50 m	Wall outlet with 4 x LC APC both sides pull-out aid – Compact version Plug-In
150C049HKK530G	white	30 m	Wall outlet 4 x LC APC both sides incl. IP50 Feeding aid + Mounting kit – Variant Plug-In
150C049HKK550G	white	50 m	Wall outlet 4 x LC APC both sides incl. IP50 Feeding aid + Mounting kit – Variant Plug-In
150C049HKK5A0G	white	100 m	Wall outlet 4 x LC APC both sides incl. IP50 Feeding aid + Mounting kit – Variant Plug-In

Main features

- >

compact fiber optic connection unit for surface mounting on flush-mounted or cavity wall outlets

>

equipped with LC APC adapters including laser protection

>

for the connection of up to four fiber optic patch cables (SM, 9/125µm, OS2)

>

ready to mount, pre-terminated with mini breakout cable compact (inner cable)

>

lengths between 10 and 100 m

>

fixing material included in delivery
- >

splice variant: with an open cable end for splicing to a distributor

>

Plug-In variant: with SC, LC or E2000 plugs for a direct plug connection. To protect the fan-out, bubble wrap, an IP50 pull-in aid, or a Compact pull-in aid are available

>

for cable details see p.21

>

color of cover parts pure white RAL 9010

>


further variants on request

Aesthetically pleasing apartment handover point with cable spool

Figure: variant splice



Konfigurator

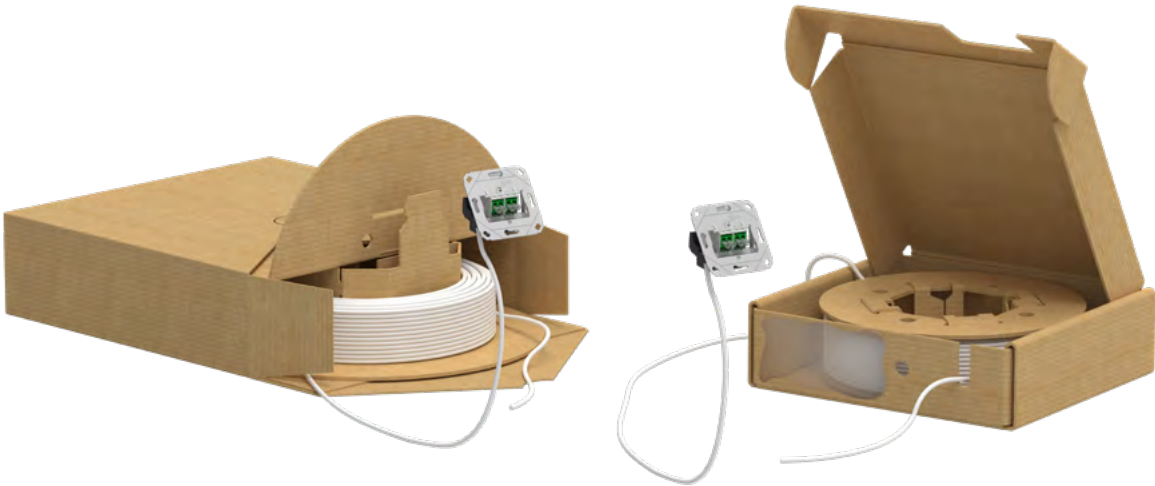

14


OpDAT VGAD

P/N	Color	Length	Variant
150C049DK0030E	white	30 m	Wall outlet with 4 x LC APC – variant splice
150C049DK0050E	white	50 m	Wall outlet with 4 x LC APC – variant splice
150C049DK00A0E	white	100 m	Wall outlet with 4 x LC APC – variant splice
150F049DK0020E	white	20 m	Wall outlet with 4 x LC APC – variant splice
150F049DK0030E	white	30 m	Wall outlet with 4 x LC APC – variant splice
150F049DK0040E	white	40 m	Wall outlet with 4 x LC APC – variant splice

Main features

- > compact fiber-optic connection box (UP0) for mounting in flush-mounted, cavity wall, and parapet trunking boxes with a minimum depth of 45 mm
- > fully design-compatible – compatible with the central inserts and cover plates from the product ranges of leading switch manufacturers.
- > Wall outlet pre-assembled with a single-mode indoor cable and equipped with two LC-D APC adapters for connecting up to four fiber optic patch cables
- > Cable wound onto a cardboard drum for easy installation
- > OS2 single-mode fiber, E9/125 μm , bend-insensitive according to ITU-T G.657.A2, compatible with G.652.D
- > Lengths between 10 and 150 m
- > Splice version: with an open cable end for splicing at a distribution point
- > Plug-in version: with SC, LC, or E2000 connectors for a direct plug-in connection. Bubble wrap, an IP50-rated pulling aid, or a compact pulling aid are available to protect the fan-outs
- > Also available as UP and UPK
- > All available variants can be configured in the configurator

Flat entry point without a cable drum

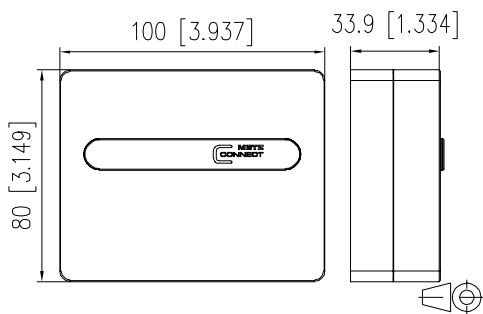

15

OpDAT ADT

Part number	Color	Variant
1501107G01HC	white	Wall outlet VIK for 2 x LC APC
1501107G02HC	white	Wall outlet VIK for 4 x LC APC

Main features

- › compact fiber optic walloutlet for surface mounting on flush-mounted or cavity wall outlets. Also suitable for DIN rail mounting in the switch cabinet.
- › equipped with LC APC adapters including laser protection
- › prepared for connecting of VIK with compact mini breakout cable (interior cable) or FITH cable
- › cover is removable without tools
- › color of cover parts pure white RAL 9010
- › fixing material included in delivery
- › further variants on request

Pre-terminated installation cable (VIK)

Figure: with compact insertion aid



Configurator



16

OpDAT VIK C

Part number	Color	Length	Variant
152C049KK2030E	white	30 m	4 x LC APC / 4 x LC APC
152C049KK2050E	white	50 m	4 x LC APC / 4 x LC APC
152C049KK2080E	white	80 m	4 x LC APC / 4 x LC APC


Main features

- > pre-terminated installation cables (VIK) with mini break-out cables compact are equipped fiber optic (FO) cables equipped with connectors on one or both sides. These are individually manufactured by hand under the highest quality requirements at METZ CONNECT in Blumberg.
- > they enable a quick and easy to install point-to-point connection between the house and flat entry point
- > suitable for indoor use. For outdoor installation, e.g. between 2 buildings, we recommend VIKs with an universal cable (see page 20)
- > with four SM fibers, for more details about the cable, see page 20
- > assembled with LC APC connectors
- > available as cable ring or on wooden spool (depending on length and cable type)
- > for further variants, see the cable configurator below: www.metz-connect.com/configurator

Patch cords



Configurator

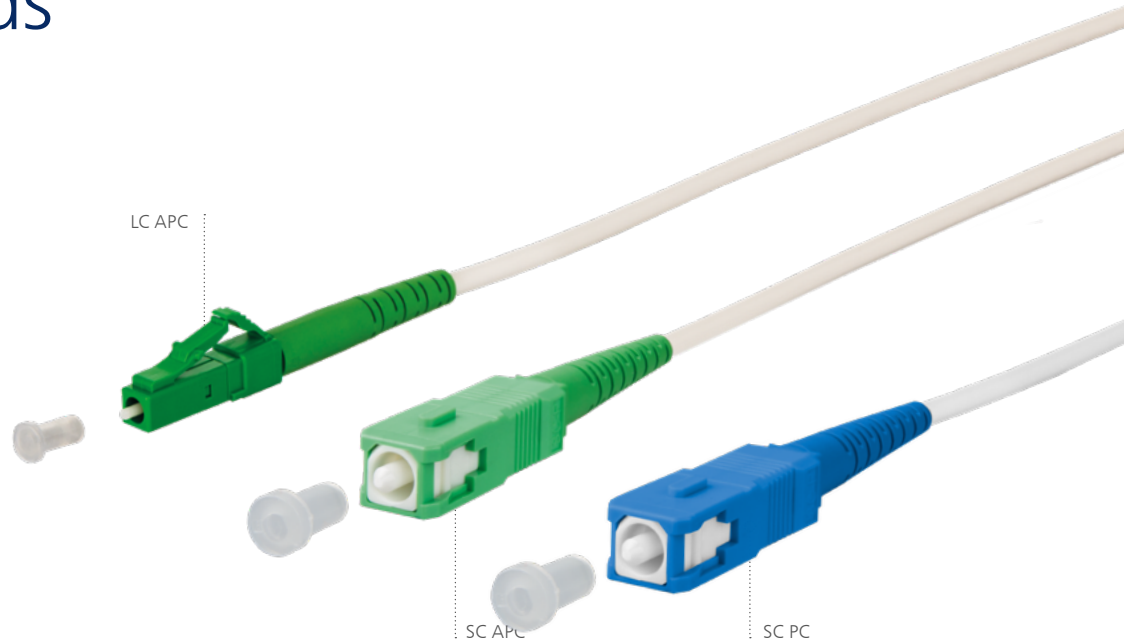

17



OpDAT PK

Part number	Color	Length	Variant
151P7AJA10E	white	1.0 m	LC APC/ LC APC
151P7EAJA10E			LC APC/ SC APC
151P7EOJA10E			LC APC/ SC UPC
151P7AJA20E	white	2.0 m	LC APC/ LC APC
151P7EAJA20E			LC APC/ SC APC
151P7EOJA20E			LC APC/ SC UPC
151P7AJA30E	white	3.0 m	LC APC/ LC APC
151P7EAJA30E			LC APC/ SC APC
151P7EOJA30E			LC APC/ SC UPC

Main features

- > simplex patch cords with LC APC connectors at both ends
- > for connecting the building transfer point or the network terminal device
- > single mode fiber OS2, E9/125 μ m insensitive to bending in accordance with IEC 60793-2-50 type B6_a and B6_b and G.657.A2, compatible with G.652.D
- > outer diameter: 2.8 mm
- > color: white
- > cable sheath is halogen-free with low smoke emission LSHF-FR (Low smoke, halogen free, flame retardant)
- > 100 % tested for insertion loss and return loss
- > all patch cords are provided with a serial number
- > for further variants, see the cable configurator below: www.metz-connect.com/configurator
- > available in different lengths (between 0.2 and 20 m)

Wall-mounted distributor (Multi-family dwelling) OpDAT WVV

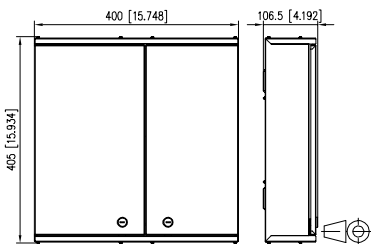

18

OpDAT WV


Part number	Variant
1503397A06-C	6 x LC-Q APC
1503397A12-C	12 x LC-QAPC
1503397A18-C	18 x LC-Q APC
1503397A24-C	24 x LC-Q APC
1503397A30-C	30 x LC-Q APC

Main features

- > up to 5 single circuit splice tray blocks with 6 splice trays each enable the fibers of each individual residential unit to be placed and spliced separately
- > each splice tray is equipped with 4 pigtails each. The pigtails are placed down and ready to splice.
- > each LC-Q adapter is directly assigned to a splice tray and therefore a residential unit
- > the innovative cable catch provides secure strain relief for the incoming cables
- > in the patch area, incoming patch cords can be safely routed and inserted through a foam cable feeding from top to bottom
- > alternatively, a pre-assembled cable can be screwed in and caught between the building transfer point and the wall-mounted distributor
- > wall-mounted distributor size M
- > labeling fields in the doors

Multifunctional distributor

OpDAT MV

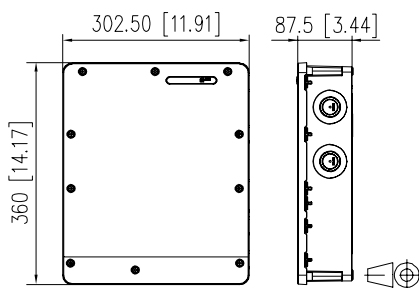

19



OpDAT MV

Part number	Variant 1	Variant 2
1503600RJ00-E	unequipped, IP54	12 x Module excerpts IP54
15036C97609-E	equipped, IP54	9 x LC-D APC splice IP54
15036C97612-E	equipped, IP54	12 x LC-D APC splice IP54

Main features

- > up to 24 fiber optic connectors or 12 module slots
- > alternative: perforated sheet for flexible equipment
- > stackable housings for more capacity
- > single circuit cassettes for crimp or shrink splices
- > space for up to 144 splices
- > 12 x M12/M16 and 2 x M20/M25 cable inputs
- > variable cable outputs for patch cables with different diameters
- > IP54 version sealable and with two separate lockable doors
- > IP65 variant for harsh environments
- > mounting option for gas blockers and microducts
- > strain relief for incoming and outgoing cables
- > elegant design from METZ CONNECT
- > plastic housing in white (RAL 9010)
- > dimensions (W x H x D): 360 x 302.5 x 87.5 mm

Universal cable E_{ca}

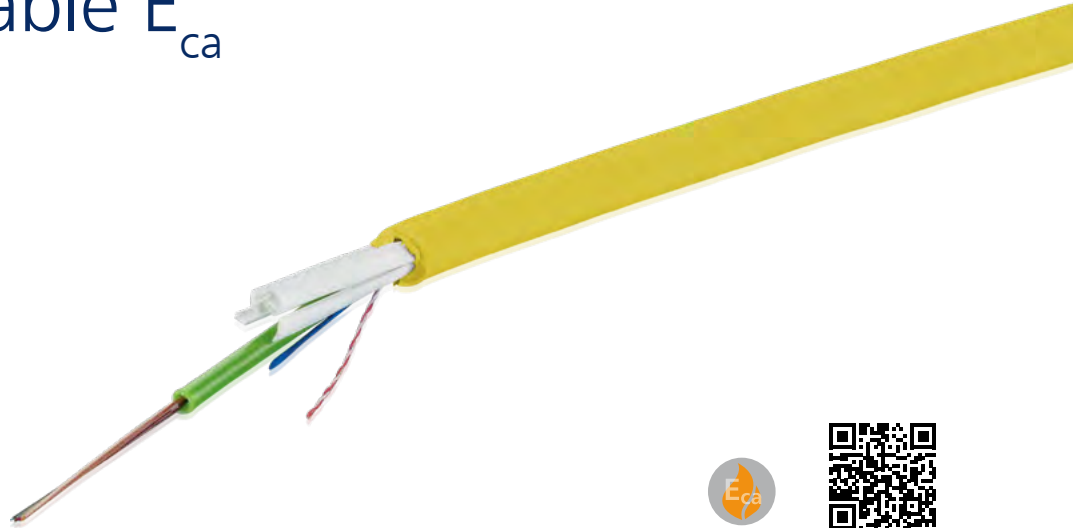

Configurator

20



OpDAT Universal cable E_{ca}

Part number	Outer diameter	Number of fibers	Fiber type
150U0049E120M	7.5 mm	1 x 4	E9/125 μ m (OS2)
150U0089E120M	7.5 mm	1 x 8	E9/125 μ m (OS2)
150U0129E120M	7.5 mm	1 x 12	E9/125 μ m (OS2)
150U0249E120M	11.2 mm	2 x 12	E9/125 μ m (OS2)
150U0249E240M	11.2 mm	1 x 24	E9/125 μ m (OS2)
150U0489E120M	11.2 mm	4 x 12	E9/125 μ m (OS2)

Main features

- > Loose tube cable for indoor and outdoor use
- > single mode fiber OS2, E9/125 μ m, insensitive to bending in accordance with IEC 60793-2-50 type B6_a and B6_b and G.657.A1, compatible with G.652.D
- > UV-resistant, metal-free, longitudinally watertight, guaranteed tensile strength and rodent-repellent
- > strain relief: longitudinal watertight winding, Glass roving elements
- > cable sheath: LSHF
- > for pipe installation or direct buried installation in a suitable sand bed
- > applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-1, EN 187000
- > fire performance: class E_{ca}
- > for further variants, see the cable configurator below: www.metz-connect.com/configurator

Universal cable C_{ca}

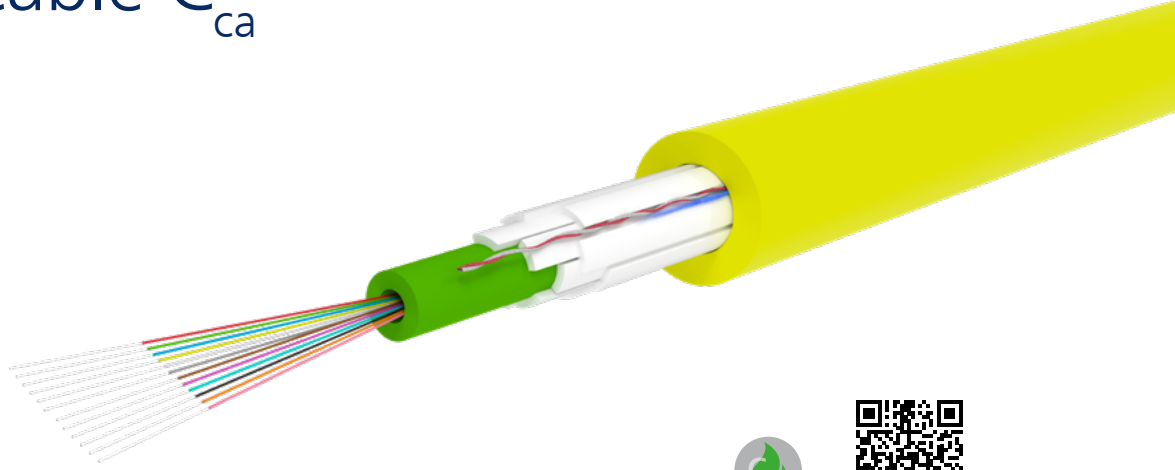

Configurator



OpDAT Universal cable C_{ca}

Part number	Outer diameter	Number of fibers	Fiber type
150U0049C120D	7.5 mm	1 x 4	E9/125 μm (OS2)
150U0089C120D	7.5 mm	1 x 8	E9/125 μm (OS2)
150U0129C120D	7.5 mm	1 x 12	E9/125 μm (OS2)
150U0249C120D	11.2 mm	2 x 12	E9/125 μm (OS2)
150U0249C240D	11.2 mm	1 x 24	E9/125 μm (OS2)

Main features

- › loose tube cables for indoor and outdoor use
- › single mode fiber OS2, E9/125 μm, insensitive to bending in accordance with IEC 60793-2-50 type B6_a and B6_b and G.657.A1, compatible with G.652.D
- › UV-resistant, metal-free, longitudinally watertight, guaranteed tensile strength and rodent-repellent
- › strain relief: longitudinal watertight winding, Glass roving elements
- › cable sheath: LSHF
- › for pipe installation or direct buried installation in a suitable sand bed
- › applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-1, EN 187000
- › fire performance: class C_{CA}- s1a, d1,a1
- › for further variants, see the cable configurator below: www.metz-connect.com/configurator

Mini breakout cable compact

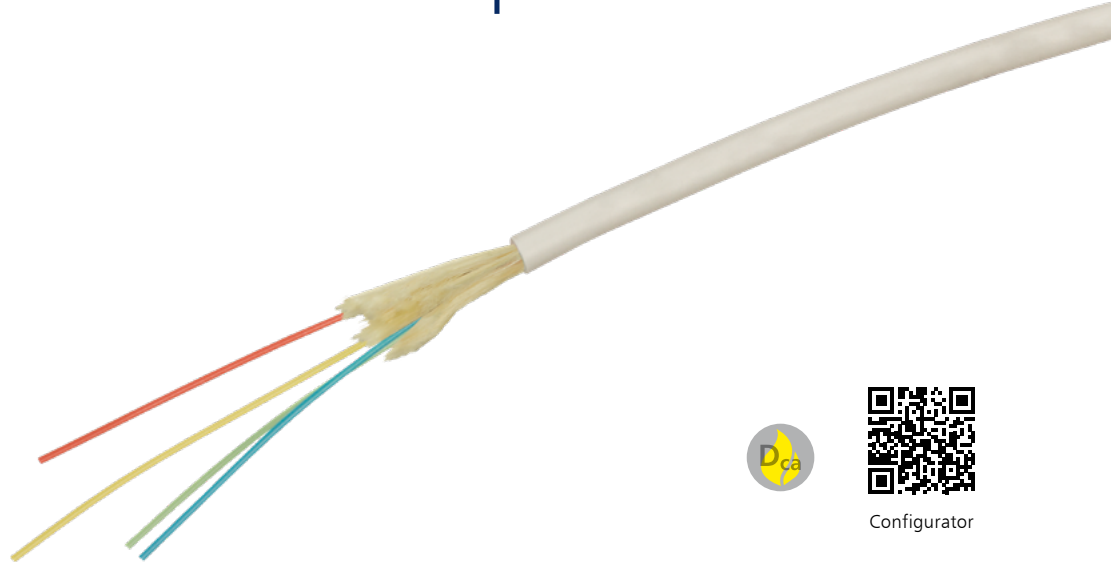

Configurator

22



OpDAT MBO C

Artikelnummer	Aussendurchmesser	Faseranzahl	Fasertyp
150C0049D010M	4,5 mm	4 Fasern	E9/125 μ m (OS2)

Hauptmerkmale

- > kompaktes Mini-Breakoutkabel für Innenanwendungen für Horizontal- und Backbone-Verkabelung
- > Singlemodefaser OS2, E9/125 μ m biegeunempfindlich gemäß IEC 60793-2-50 Typ B6_a und B6_b und G.657.A1, kompatibel zu G.652.D
- > mit 4-farbigen Volladern ($\varnothing$ 0,9 mm) und Aramid-Garn zur Zugentlastung
- > Kabelmantel halogenfrei mit niedriger Rauchentwicklung und selbstlöschend. LSHF-FR („Low smoke, halogen free, flame retardant“)
- > Außendurchmesser: 4,5 mm
- > Farbe: weiß
- > geltende Normen: IEC 60794-2-20
- > Brandverhalten: Klasse D_{ca}

FITH cable

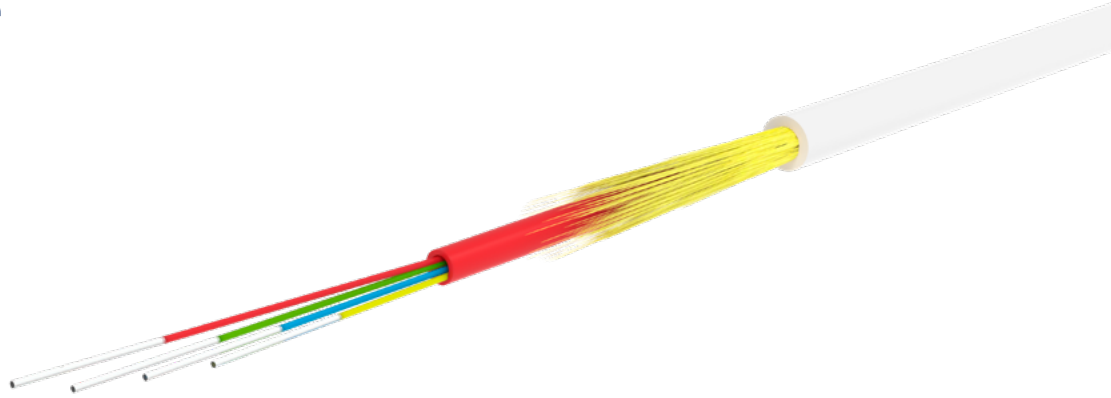

Configurator

23


OpDAT FITH

Part number	Outer diameter	Number of fibers	Fiber type
150F0049B040M	2.3 mm	4 fibers	SM9/125 μ m (OS2)

Main features

- > FITH cable for indoor applications
- > for horizontal and backbone cabling
- > single mode fiber OS2, SM9/125 μ m, bend insensitive according to IEC 60793-2-50 type B6_a, ITU G.657.A2 compatible to ITU-T G.652.D
- > with 4 colored fibers incl. secondary coating ($\varnothing$ 0.25 mm) and aramid yarn for strain relief
- > cable jacket halogen free with low smoke development and flame-extinguishing, LSHF (low smoke, halogen free)
- > outer diameter 2.3 mm
- > color: white
- > applicable standards: IEC 60794-2-20
- > fire behaviour: class B2_{ca} s1a d0 a1 acc. to EN 50399 (classification according to EN 13501-6)

Connector suitable for field assembly

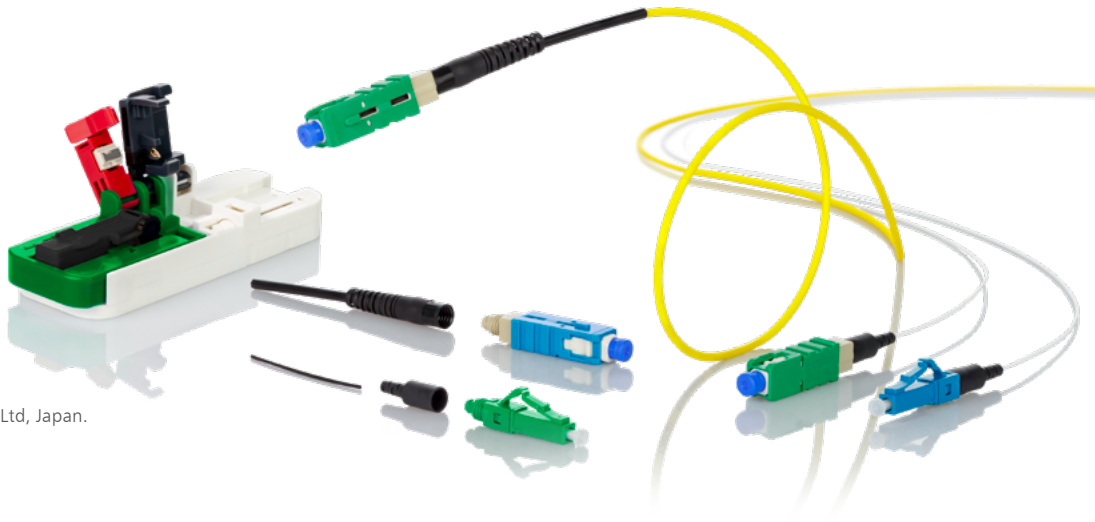

FAST™ is a registered trademark of Fujikura Ltd, Japan.

OpDAT FAST™ Hybrid

Part number	Scope of delivery		Cable type	Connector type
	Connector kits	Accessories		
1509QAJA010C-E	100	Cleaver set, fiber guide	0.25 + 0.9 mm	LC APC
1509QAJA002C-E	20	Cleaver set, fiber guide		
1509QAJA0010-E	10	–		
1509QKJA010C-E	100	Cleaver set, fiber guide Cable assembly set	2.0 + 3.0 mm	
1509QKJA002C-E	20	Cleaver set, fiber guide Cable assembly set		
1509QKJA0010-E	10	–		
1509QAEA010C-E	100	Cleaver set, fiber guide	0.25 + 0.9 mm	SC APC
1509QAEA002C-E	20	Cleaver set, fiber guide		
1509QAEA0010-E	10	–		
1509QKEA010C-E	100	Cleaver set, fiber guide Cable assembly set	2.0 + 3.0 mm	
1509QKEA002C-E	20	Cleaver set, fiber guide Cable assembly set		
1509QKEA0010-E	10	–		

Main features

- › with hybrid technology for better and constant optical insertion damping values
- › simple, easy to learn, fast and cost-effective mounting in less than two minutes
- › available with connector types LC and SC for single mode (UPC and APC polish)
- › connector kits for FO buffers with Ø 0.25 and Ø 0.9 mm
- › connector kits for FO cables with Ø 2.0 and Ø 3.0 mm
- › the connector can be assembled up to three times
- › the separating device included in the scope of delivery (cleaver) provides a slanted cut, so that high return damping values are achieved.
- › it is maintenance-free and can be used up to 200 times
- › every OpDAT FAST™ hybrid connector has a serial number, so that traceability is ensured at all times

Notes

Interesting Information

Terms and abbreviationsn

APL:	Terminal point line technology (= APL)	ONU:	Optical Network Unit: termination device in point-to-multi-point solutions on the customer's premises, comparable with ONT
APN:	Switch point of the network operator in the house entry point (= APL)	OTO:	Optical Terminal Outlet: subscriber interface
ASG:	Application-specific device, e.g. fiber optic modem at the subscriber interface	POP:	Point of Presence: central interface of the network operator or (= VST or CO)
CO:	Central office (= VST or POP)	PON:	Passive optical network
CPE:	Customer Premises Equipment: generic term for the devices on the customer's premises, such as ASG, ONT, ONU, IAD	PPPoE:	Point-to-Point Protocol over Ethernet
DP:	Distribution point: distribution point between the POP and HÜP, e.g. cable junction box, fiber optic ferrule	PV:	Primary distributor as a building distributor (= Gf-GV)
ENS:	External network interface, describes the transition from the operator network to the apartment network and includes the fiber optic modem (ASG)	SC-APC:	FO connectors with angled polish for optimal Return damping
EPON:	Ethernet via passive optical networks with transmission rates of 1.244 GBit/s, which are distributed among the subscribers via passive optical splitters	SkV:	Secondary distributor: floor distributors in large multi-family dwellings
GPON:	Gigabits via passive optical networks with transmission rates of 2.488 GBit/s, which are distributed among the subscribers via passive optical splitters	SM:	Single mode fiber: 9/125 μm , OS2
Gf-AP:	Fiber optic terminal point of the network operator (= APN or APL)	TA:	Subscriber connection, e.g. RJ-45 junction box for the terminal devices in the apartment
Gf-GV:	Fiber optic building distributor (= PV)	TS:	Subscriber interface in a wall outlet or connecting the fiber optic modem, network termination point (= Gf-TA or OTO)
Gf-TA:	Fiber optic subscriber outlet (=TS)	VST:	Central exchange of the network operator
HÜP:	Building transfer point of the network operator	WDM:	Wavelength division multiplexing in PON networks
IAD:	Integrated Access Device: multifunctional device with router, WLAN-AP, switch, e.g. FRITZ!Box. The ASG can also be integrated into the IAD.	WV:	Apartment distributor: multimedia distributor in the apartment: from now on the cables go in a star shape to the RJ45 connections (TA) in the apartment from the feeder
KVz:	Cable junction box: distribution point, usually placed at the roadside	Cabling:	Connection cable from the central exchange of the network operator to the cable junction box
LC-APC:	FO connectors with angled polish for optimal Return damping	Drop cabling:	Connection cable between the distribution point and house entry point of the network operator and between the primary distributor as a building distributor and subscriber interface in a wall outlet
ONT:	Optical Network Termination: termination device in Ethernet point-to-point solutions on the customer's premises, e.g. fiber optic modem. Belongs to the network operator or service provider, converts the light signals into electrical signals and offers an RJ45 Ethernet interface and optionally a coax connection for TV signals.	Riser cabling:	Connection cable between the primary distributor as a building distributor and secondary distributor

This information brochure provides general information on how to set up a fiber optic network in exemplary buildings. All information, descriptions and illustrations are non-binding and are not a substitute for precise planning by competent specialists on site. Individual case-specific features may lead to deviations from our planning proposals and specifications and restrictions in terms of feasibility.

Warranty claims cannot be derived from this

© METZ CONNECT GmbH, Im Tal 2, 78176 Blumberg.

All rights reserved, especially the right of reproduction and translation.



METZ CONNECT GmbH

Im Tal 2
78176 Blumberg
Germany

Phone +49 7702 533-0
Fax +49 7702 533-189

info@metz-connect.com
www.metz-connect.com

METZ CONNECT USA Inc.

200 Tornillo Way
Tinton Falls, NJ 07712
USA

Phone +1 732 389 1300
Fax +1 732 389 9066

METZ CONNECT France SAS

28, Rue Schweighaeuser
67000 Strasbourg
France

Phone +33 3886 17073
Fax +33 3886 19473

METZ CONNECT AUSTRIA GmbH

c/o German chamber of commerce
in Austria

Schwarzenbergplatz 5, Top 3/1
1030 Vienna
Austria

Phone +43 1 227 12 64
Fax +43 1 227 12 66

METZ CONNECT Zhongshan Ltd.

Ping Chang Road
Ping Pu Industrial Park
Sanxiang Town
Zhongshan City, 528463
Guangdong Province
China

Phone +86 760 86365055
Fax +86 760 86365050

METZ CONNECT Asia Pacific Ltd.

Suite 1803, 18/F
Chinachem Hollywood Centre,
1 Hollywood Road, Central
Hong Kong

Phone +852 26 027 300
Fax +852 27 257 522

