


Data sheet

PC board insert M12, X-coded, 8-pole, green,
Tape & Reel


Page 1/5

P/N
MMT060A315-G2
EAN 4251394627977
2026/08/03
Version: S


Illustrations

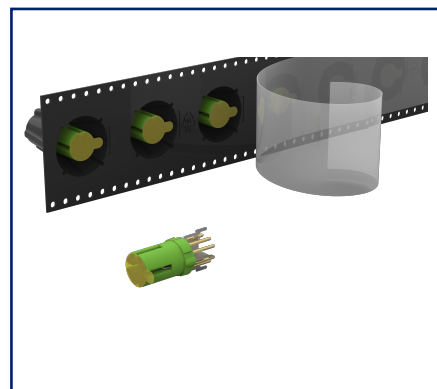

Dimensional drawing

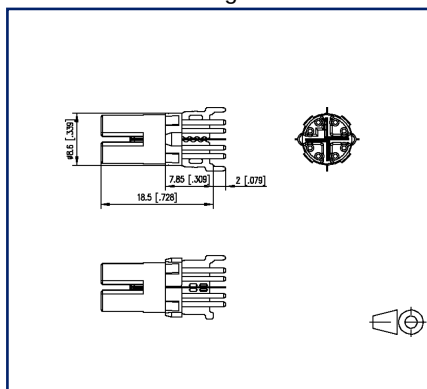

Drill pattern

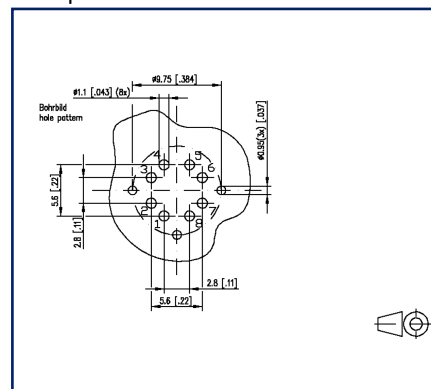

See enlarged drawings at the end of document

Product specification

- PC board insert M12
- 8-pole, X-coded according to IEC 61076-2-109
- 10 GBit suitable according to IEEE 802.3an
- THR solderable
- Top entry
- Contact carriers green
- Tape & Reel packaging
- suitable for applications in the railway industry according to data sheet



Data sheet

Page 2/5

PC board insert M12, X-coded, 8-pole, green, Tape & Reel

P/N

MMT060A315-G2

EAN 4251394627977

2026/08/03

Version: S

Technical Data

General Data

Dimensions

Dimension (D x H)	Ø 9.2 mm x 20.5 mm
Dimension (D x H)	0.362 in. x 0.807 in.
Ports	Single port
Coding	X-coded

Electrical characteristics

Rated voltage	50 V AC / 60 V DC
Effective value of the withstand voltage	0.5 kV
Current carrying capacity at 40 °C	0.5 A
Insulation resistance	min. 100 MOhm
Overvoltage category	II
Degree of pollution	2

Mechanical data

Material

Material - Contact	CuZnPb
Contact surface	Ni + Au
Shield material	CuSn
Color	green
Life - Number of mating cycles	>= 100
Protection category	IP65, IP67 when plugged in
Particulate ingress	IP6X when plugged in
Liquid ingress/immersion	IPX5, IPX7 when plugged in

Climatic properties

Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F

Approvals

Approval mark UL/CSA	E178484
----------------------	---------



Data sheet

Page 3/5

PC board insert M12, X-coded, 8-pole, green, Tape & Reel

P/N

MMT060A315-G2

EAN 4251394627977

2026/08/03

Version: S

Technical Data

Standards/Regulations

Railway applications

Insulating body	PA UL 94 V0 complies with HL1-HL3; R26 according to EN 45545-2:2020+A1:2023
-----------------	---

Flammable mass (g)	0.62 g
--------------------	--------

Classifications

ETIM 7.0	EC002637
----------	----------

ETIM 8.0	EC002637
----------	----------

ETIM 9.0	EC002637
----------	----------

ETIM 10.0	EC002637
-----------	----------

Packaging

Type of packaging	160 pc(s) / Tape & Reel
-------------------	-------------------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet


PC board insert M12, X-coded, 8-pole, green, Tape & Reel

Page 4/5


P/N
MMT060A315-G2
EAN 4251394627977
2026/08/03
Version: S

Illustrations

Dimensional drawing

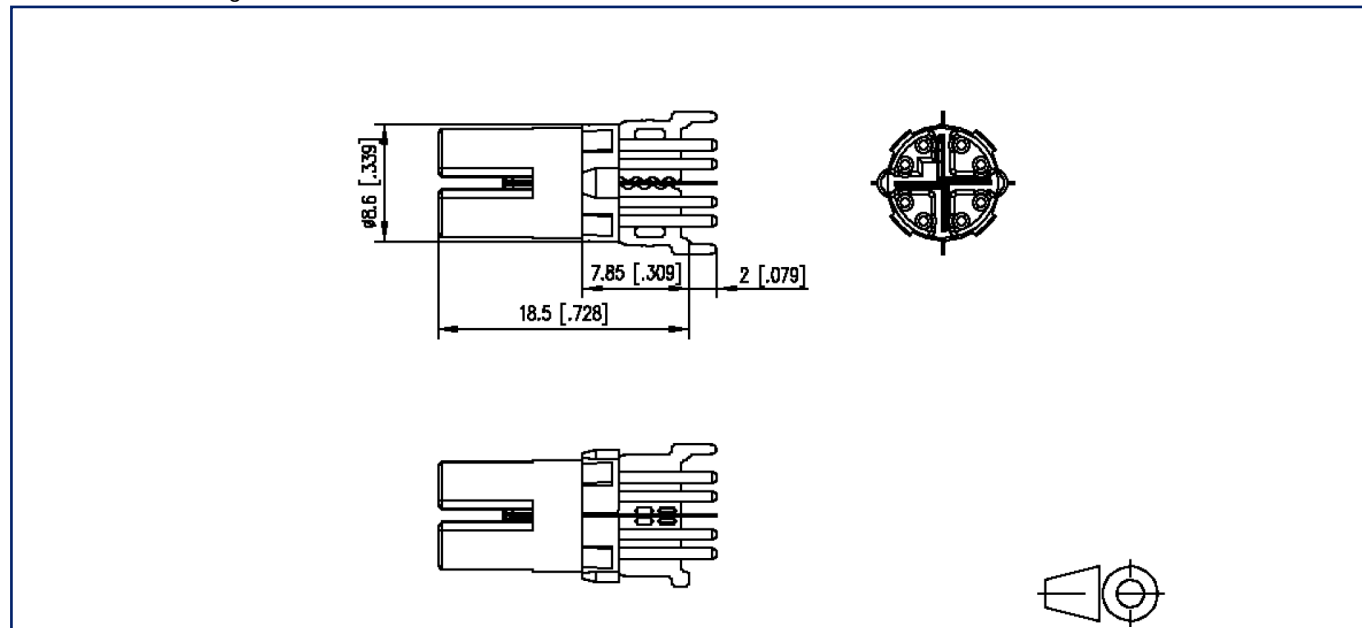

Drill pattern

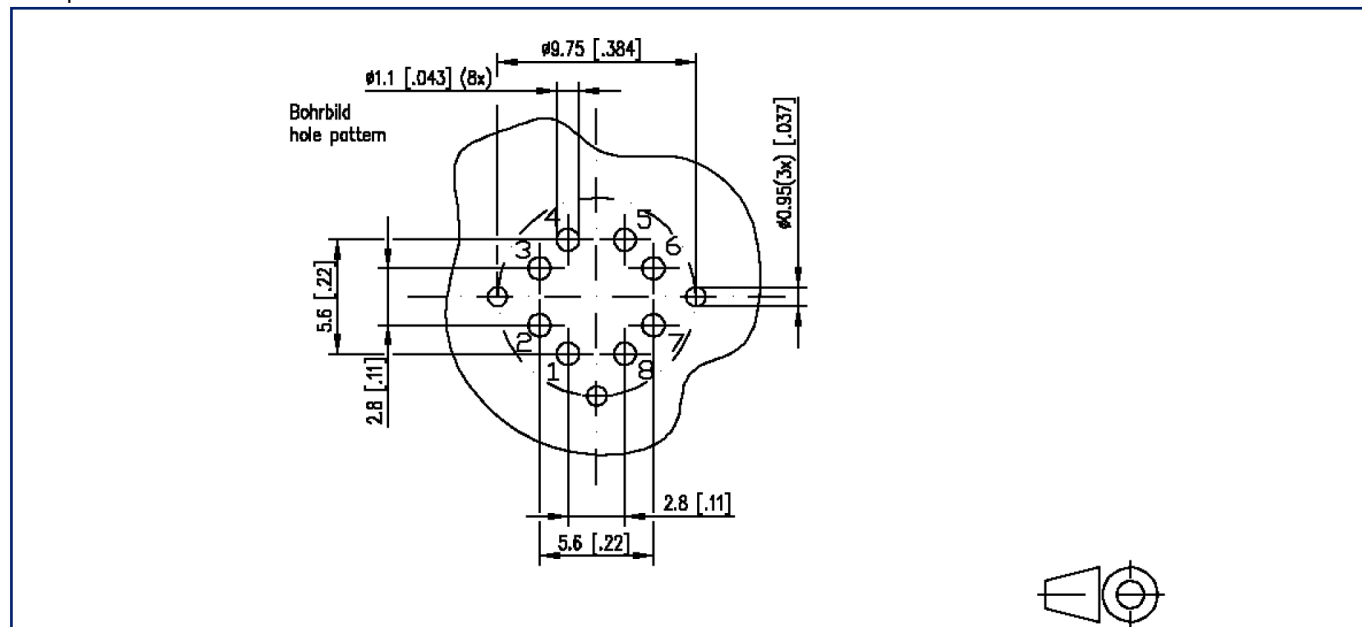

Data sheet

Page 5/5

PC board insert M12, X-coded, 8-pole, green,
Tape & Reel

P/N

MMT060A315-G2

EAN 4251394627977

2026/08/03

Version: S

Illustrations

Snap-in geometry

