

Data sheet

Cover plate 80 x 80 mm, traffic white, modul

Page 1/5

P/N

820395-0127-I

EAN 4251394640297


2026/08/20

Version: E

Illustrations



Dimensional drawing

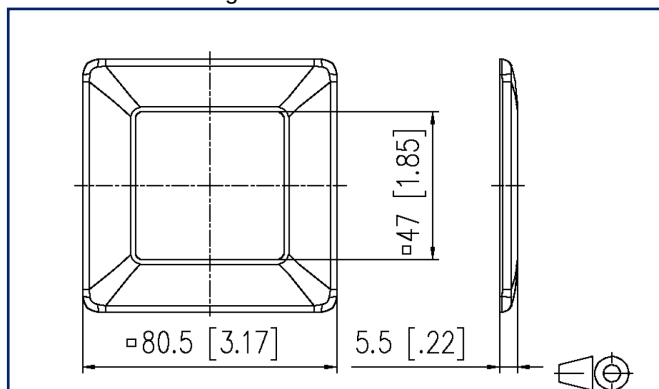

See enlarged drawings at the end of document

Product specification

- extension of UPk wall outlets to flush-mounted wall outlets
- suitable for all modular wall outlets
- matt surface
- traffic white (RAL 9016), pure white (RAL 9010) or pearl white (RAL 1013)
- variants: traffic white, pure white, pearl white



Data sheet

Page 2/5

Cover plate 80 x 80 mm, traffic white, modul

P/N

820395-0127-I

EAN 4251394640297

2026/08/20

Version: E

Technical Data

General Data

Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	cover
Mounting style	Raceway-mounted to flush-mounted
Color	traffic white - RAL 9016
Dimensions	
Dimension (L x W x H)	80.5 mm x 80.5 mm x 5.5 mm
Dimension (L x W x H)	3.169 in. x 3.169 in. x 0.217 in.

Materials and material properties

Material	ABS
Halogen free	yes
RoHS	compliant

Classifications

ETIM 7.0	EC002424
ETIM 8.0	EC002424
ETIM 9.0	EC002424
ETIM 10.0	EC002424

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Cover plate 80 x 80 mm, traffic white, modul

P/N

820395-0127-I

EAN 4251394640297

2026/08/20

Version: E

Accessories from

P/N	Designation
1309111200-E	E-DAT modul 1 port flush mounted without cover Cat.6 _A
1309121200-E	E-DAT modul 2 port flush mounted without cover Cat.6 _A
1309131200-E	E-DAT modul 3 port flush mounted without cover Cat.6 _A
1309141200-E	Modul wall outlet flush mounted without cover 3 port unequipped
1309151200-E	Modul wall outlet flush mounted without cover 2 port unequipped
130B11D11200-E	C6 _A modul 1 port 180°M flush mounted without cover
130B11D21200-E	C6 _A modul 2 port 180°M flush mounted without cover
130B11D31200-E	C6 _A modul 3 port 180°M flush mounted without cover
130B12D11200-E	C6 _A modul 1 port 270°M flush mounted without cover
130B12D21200-E	C6 _A modul 2 port 270°M flush mounted without cover
130B12D31200-E	C6 _A modul 3 port 270°M flush mounted without cover
130B20D11200KE	Keystone wall outlet flush mounted without cover 1 port unequipped
130B20D21200KE	Keystone wall outlet flush mounted without cover 2 port unequipped
130B20D31200KE	Keystone wall outlet flush mounted without cover 3 port unequipped
150C029DK0010E	OpDAT VGAD UP0 splice 2xLC APC OS2, 10.0 m, cable ø 4.5 mm
150C029DK0020E	OpDAT VGAD UP0 splice 2xLC APC OS2, 20.0 m, cable ø 4.5 mm
150C029DK0030E	OpDAT VGAD UP0 splice 2xLC APC OS2, 30.0 m, cable ø 4.5 mm
150C029DK0040E	OpDAT VGAD UP0 splice 2xLC APC OS2, 40.0 m, cable ø 4.5 mm
150C029DK0050E	OpDAT VGAD UP0 splice 2xLC APC OS2, 50.0 m, cable ø 4.5 mm
150C029DK0060E	OpDAT VGAD UP0 splice 2xLC APC OS2, 60.0 m, cable ø 4.5 mm
150C029DK0080E	OpDAT VGAD UP0 splice 2xLC APC OS2, 80.0 m, cable ø 4.5 mm
150C049DK0010E	OpDAT VGAD UP0 splice 4xLC APC OS2, 10.0 m, cable ø 4.5 mm
150C049DK0015E	OpDAT VGAD UP0 splice 4xLC APC OS2, 15.0 m, cable ø 4.5 mm
150C049DK0020E	OpDAT VGAD UP0 splice 4xLC APC OS2, 20.0 m, cable ø 4.5 mm



Data sheet

Page 4/5

Cover plate 80 x 80 mm, traffic white, modul

P/N

820395-0127-I

EAN 4251394640297

2026/08/20

Version: E

Accessories from

150C049DK0025E	OpDAT VGAD UP0 splice 4xLC APC OS2, 25.0 m, cable ø 4.5 mm
150C049DK0030E	OpDAT VGAD UP0 splice 4xLC APC OS2, 30.0 m, cable ø 4.5 mm
150C049DK0035E	OpDAT VGAD UP0 splice 4xLC APC OS2, 35.0 m, cable ø 4.5 mm
150C049DK0040E	OpDAT VGAD UP0 splice 4xLC APC OS2, 40.0 m, cable ø 4.5 mm
150C049DK0045E	OpDAT VGAD UP0 splice 4xLC APC OS2, 45.0 m, cable ø 4.5 mm
150C049DK0050E	OpDAT VGAD UP0 splice 4xLC APC OS2, 50.0 m, cable ø 4.5 mm
150C049DK0055E	OpDAT VGAD UP0 splice 4xLC APC OS2, 55.0 m, cable ø 4.5 mm
150C049DK0060E	OpDAT VGAD UP0 splice 4xLC APC OS2, 60.0 m, cable ø 4.5 mm
150C049DK0065E	OpDAT VGAD UP0 splice 4xLC APC OS2, 65.0 m, cable ø 4.5 mm
150C049DK0070E	OpDAT VGAD UP0 splice 4xLC APC OS2, 70.0 m, cable ø 4.5 mm
150C049DK0080E	OpDAT VGAD UP0 splice 4xLC APC OS2, 80.0 m, cable ø 4.5 mm
150C049DK0090E	OpDAT VGAD UP0 splice 4xLC APC OS2, 90.0 m, cable ø 4.5 mm
150C049DK00A0E	OpDAT VGAD UP0 splice 4xLC APC OS2, 100.0 m, cable ø 4.5 mm
150F029DK0010E	OpDAT VGAD UP0 splice 2xLC APC OS2, 10.0 m, cable ø 2.3 mm
150F029DK0050E	OpDAT VGAD UP0 splice 2xLC APC OS2, 50.0 m, cable ø 2.3 mm
150F049DK0010E	OpDAT VGAD UP0 splice 4xLC APC OS2, 10.0 m, cable ø 2.3 mm
150F049DK0020E	OpDAT VGAD UP0 splice 4xLC APC OS2, 20.0 m, cable ø 2.3 mm
150F049DK0030E	OpDAT VGAD UP0 splice 4xLC APC OS2, 30.0 m, cable ø 2.3 mm
150F049DK0040E	OpDAT VGAD UP0 splice 4xLC APC OS2, 40.0 m, cable ø 2.3 mm



Data sheet

Page 5/5

Cover plate 80 x 80 mm, traffic white, modul

P/N

820395-0127-I

EAN 4251394640297

2026/08/20

Version: E

Illustrations

Dimensional drawing

