

# Data sheet

## C6<sub>A</sub>modul 180° jack (12 pcs)

Page 1/11

P/N

130B11-Z

EAN 4251394608624


2026/08/21

Version: U


### Illustrations



Dimensional drawing

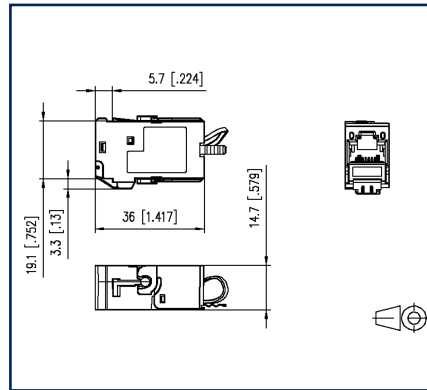

Cut-out

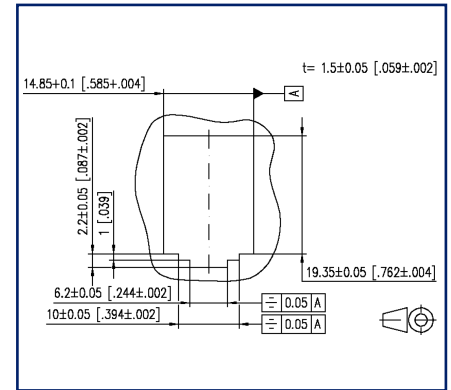

See enlarged drawings at the end of document

### Product specification

- modular Cat.6<sub>A</sub> termination unit RJ45
- mounting version: module, 180° cable feed
- solid, one-piece and reusable module housing refined with zinc die-casting
- mounting without special tools, strain relief directly snapped on to stuffer cap
- migration to 25G-systems without special tools
- easy to install connection of data lines AWG 26/1 to 22/1 (solid wire) and AWG 26/7 to 22/7 (stranded wire) to insulation displacement connectors (IDC)
- intelligent cable management in stuffer cap - also suitable for heavily twisted cables
- conductor assignment to T568A and T568B is directly printed on the stuffer cap
- certified to GHMT Cat.6<sub>A</sub> re-embedded PVP
- Cat.6<sub>A</sub> component test according to ISO/IEC 11801, DIN EN 50173-1, ANSI/TIA-568.2-D and IEC 60603-7-51, GHMT certified
- compliance with class E<sub>A</sub> up to 500 MHz according to ISO/IEC 11801, DIN EN 50173-1
- tested: component up to 600 MHz, link up to 800 MHz
- suitable for 10 GBit Ethernet (IEEE 802.3an), Remote Powering (PoE, PoE plus, UPoE and 4PPoE) and HDBaseT
- delivery in a 12-piece set, not available separately



## Data sheet

Page 2/11

### C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

## Technical Data

### General Data

|                                               |                                   |
|-----------------------------------------------|-----------------------------------|
| Mechanical measurement according to MICE      | M1                                |
| Ingress measurement according to MICE         | I1                                |
| Climatic measurement according to MICE        | C1                                |
| Electromagnetic measurement according to MICE | E2                                |
| Design                                        | Jack                              |
| Shielding                                     | shielded                          |
| Transmission technology                       | Copper                            |
| Wiring                                        | T568A, T568B                      |
| Color                                         | metallike                         |
| Dimensions                                    |                                   |
| Dimension (L x W x H)                         | 36 mm x 14.7 mm x 22.4 mm         |
| Dimension (L x W x H)                         | 1.417 in. x 0.579 in. x 0.882 in. |
| Modularity                                    | yes                               |
| Field assembly ability                        | yes                               |
| Labeling option                               | on housing                        |
| Marking option                                | by latching clip                  |

### Transmission characteristics

|                                 |                |
|---------------------------------|----------------|
| Category (ISO)                  | 6 <sub>A</sub> |
| Class (ISO/IEC)                 | E <sub>A</sub> |
| Category (TIA)                  | 6A             |
| Remote Powering                 | yes            |
| PoE                             | IEEE 802.3af   |
| PoE plus                        | IEEE 802.3at   |
| UPoE                            | yes            |
| 4PPoE                           | IEEE 802.3bt   |
| HDBaseT                         | yes            |
| Transmission rate up to 10 GBit | IEEE 802.3an   |



## Data sheet

Page 3/11

### C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

## Technical Data

| Connections/interfaces                          |                                               |
|-------------------------------------------------|-----------------------------------------------|
| Connector technology interface 1                | IDC-connection                                |
| Connector technology interface 2                | RJ45-jack                                     |
| Number of ports interface 2                     | 1                                             |
| Number of ports interface 2 equipped            | 1                                             |
| Number of positions/contacts interface 1        | 8                                             |
| Number of positions/contacts interface 2        | 8P/8C                                         |
| Termination data, solid wire (min. - max.)      |                                               |
| Conductor cross section, solid wire             | AWG 26/1 - AWG 22/1                           |
| Conductor cross section, solid wire             | 0.128 mm <sup>2</sup> - 0.324 mm <sup>2</sup> |
| Conductor diameter, solid wire (bare copper)    | 0.409 mm - 0.643 mm                           |
| Conductor diameter, solid wire (bare copper)    | 0.016 in. - 0.025 in.                         |
| Termination data, stranded wire (min. - max.)   |                                               |
| Conductor cross section, stranded wire          | AWG 26/7 - AWG 22/7                           |
| Conductor cross section, stranded wire          | 0.141 mm <sup>2</sup> - 0.355 mm <sup>2</sup> |
| Conductor diameter, stranded wire (bare copper) | 0.483 mm - 0.762 mm                           |
| Conductor diameter, stranded wire (bare copper) | 0.019 in. - 0.03 in.                          |
| Aderdurchmesser (min.-max.)                     |                                               |
| Core diameter (conductor with insulation)       | 1 mm - 1.6 mm                                 |
| Core diameter (conductor with insulation)       | 0.039 in. - 0.063 in.                         |
| Cable sheath diameter (min. - max.)             |                                               |
| Cable sheath diameter                           | 5.5 mm - 10.00                                |
| Cable sheath diameter                           | 0.197 in. - 0.394                             |
| Cable access/outlet                             | 180°                                          |

| Electrical characteristics                          |                   |
|-----------------------------------------------------|-------------------|
| Current carrying capacity                           | max. 1 A at 60 °C |
| Rated voltage                                       | max. 60 V DC      |
| Rated voltage UL                                    | max. 56.5 V DC    |
| Contact resistance                                  | max. 20 mOhm      |
| Through resistance                                  | max. 200 mOhm     |
| Insulation resistance                               | min. 500 MOhm     |
| Dielectric strength conductor-conductor (secondary) | max. 1000 V DC    |



## Data sheet

Page 4/11

### C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

## Technical Data

### Mechanical data

|                                                              |                  |
|--------------------------------------------------------------|------------------|
| Cut-out                                                      | MC module        |
| Mounting method                                              | snap-in function |
| Insertion and withdrawal force                               | max. 30 N        |
| Life - Number of mating cycles                               | min. 1000        |
| Position/mounting of latch<br>standard installation position | top              |
| strain relief                                                | latching clip    |

### Materials and material properties

|                           |                |
|---------------------------|----------------|
| Material - Housing        | GD-Zn          |
| Material - Contact        | Spring steel   |
| Material - Contact finish | Au (gold)      |
| Material - Shield         | GD-Zn          |
| Material - Stuffer cap    | PA 6.6 UL94 V0 |
| Material - Strain relief  | PA 6.6 UL94 V0 |
| Material - Finish         | Ni (nickel)    |
| RoHS                      | compliant      |

### Environmental conditions

|                             |                                                    |
|-----------------------------|----------------------------------------------------|
| Rapid change of temperature | -40°C / -40°F - +70°C / 158°F / 25 cycles t=30 min |
|-----------------------------|----------------------------------------------------|

### Certifications

|                               |                                                                                     |     |
|-------------------------------|-------------------------------------------------------------------------------------|-----|
| GHMT PVP                      |  | yes |
| GHMT PVP - Period of validity | 2018/03/31                                                                          |     |



# Data sheet

## C6<sub>A</sub>modul 180° jack (12 pcs)

Page 5/11

P/N  
130B11-Z  
EAN 4251394608624  
2026/08/21  
Version: U

### Technical Data

#### Approvals

UL listed (file no.)



DUXR.E178484

#### Standards/Regulations

##### Generic cabling systems

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| General requirements | ANSI/TIA-568-C                                                   |
| Office buildings     | ISO/IEC 11801 Ed.2.2: 2011-06   DIN EN 50173-2<br>ANSI/TIA-568-C |
| Living units         | ISO/IEC 15018   DIN EN 50173-4<br>ANSI/TIA-570-B                 |

##### Connectors for electronic equipment

|                           |                           |
|---------------------------|---------------------------|
| Free and fixed connectors | DIN EN 60603-7-51:2011-01 |
|---------------------------|---------------------------|

##### Connectors for electronic equipment - Tests and measurements

|                                                                                         |                                          |
|-----------------------------------------------------------------------------------------|------------------------------------------|
| Test standard for connectors (engaging and separating connectors under electrical load) | DIN-EN 60512-99-001, DIN-EN 60512-99-002 |
| Endurance tests                                                                         | IEC 60512-9-3: 03-2009                   |

##### Interference proof

|                                      |                          |
|--------------------------------------|--------------------------|
| Immunity for industrial environments | DIN EN 61000-6-2:2006-03 |
|--------------------------------------|--------------------------|

##### Emission proof

|                                                                                        |                          |
|----------------------------------------------------------------------------------------|--------------------------|
| Electromagnetic emission for residential, commercial and light-industrial environments | DIN EN 61000-6-3:2011-09 |
| Climate tests                                                                          | IEC 60512-11             |

#### Classifications

|           |          |
|-----------|----------|
| ETIM 7.0  | EC001121 |
| ETIM 8.0  | EC001121 |
| ETIM 9.0  | EC001121 |
| ETIM 10.0 | EC001121 |

Data sheet

Page 6/11

## C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

### Technical Data

#### Packing details

Type of packaging 12 pc(s) / box

#### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



## C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

### Accessories from

| P/N            | Designation                                                                           |
|----------------|---------------------------------------------------------------------------------------|
| 130861-0202-E  | Modul surface mount housing 2 port pure white, unequipped                             |
| 130861-0302-E  | Modul surface mount housing 3 port pure white, unequipped                             |
| 130861-0402-E  | Modul surface mount housing 4 port pure white, unequipped                             |
| 130861-0602-E  | Modul surface mount housing 6 port pure white, unequipped                             |
| 130861-0802-E  | Modul surface mount housing 8 port pure white, unequipped                             |
| 130861-1202-E  | Modul surface mount housing 12 port pure white, unequipped                            |
| 130861-1602-E  | Modul surface mount housing 16 port pure white, unequipped                            |
| 130861-2402-E  | Modul surface mount housing 2x12 port pure white, unequipped                          |
| 130898018003-E | REGplus IRT-FF COAX F/F                                                               |
| 1309107003-E   | REGplus IP20 E-DAT modul                                                              |
| 1309108003-E   | REGplus IP20 FF E-DAT modul K                                                         |
| 130910P6-BKKE  | E-DAT modul K 24 port 180° 1RU, black                                                 |
| 1309141002-E   | Modul wall outlet flush mounted 1 port unequipped pure white                          |
| 1309141027-E   | Modul wall outlet flush mounted 1 port unequipped traffic white                       |
| 1309141102-E   | Modul wall outlet flush mounted trunking installation 1 port unequipped pure white    |
| 1309141127-E   | Modul wall outlet flush mounted trunking installation 1 port unequipped traffic white |
| 1309141200-E   | Modul wall outlet flush mounted without cover 3 port unequipped                       |
| 1309151002-E   | Modul wall outlet flush mounted 2 port unequipped pure white                          |
| 1309151027-E   | Modul wall outlet flush mounted 2 port unequipped traffic white                       |
| 1309151102-E   | Modul wall outlet flush mounted trunking installation 2 port unequipped pure white    |
| 1309151127-E   | Modul wall outlet flush mounted trunking installation 2 port unequipped traffic white |
| 1309151200-E   | Modul wall outlet flush mounted without cover 2 port unequipped                       |
| 1309161002-E   | Modul wall outlet flush mounted 3 port unequipped pure white                          |
| 1309161027-E   | Modul wall outlet flush mounted 3 port unequipped traffic white                       |
| 1309161102-E   | Modul wall outlet flush mounted trunking installation 3 port unequipped pure white    |



# Data sheet

Page 8/11

## C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

### Accessories from

|                |                                                                                                                |
|----------------|----------------------------------------------------------------------------------------------------------------|
| 1309161127-E   | Modul wall outlet flush mounted trunking installation<br>3 port unequipped traffic white                       |
| 130920-00-E    | Modul 19 inches module frame 1RU 24 Port light gray<br>unequipped, shielded                                    |
| 130920-BK-E    | Modul 19 inches module frame 1RU 24 port black unequipped,<br>shielded                                         |
| 130920-E       | E-DAT modul 24x8(8) 1RU patch panel Cat.6 <sub>A</sub> , light gray                                            |
| 130921-00-E    | Modul 19 inches module frame 1RU 24 port<br>stainless steel unequipped                                         |
| 130921-E       | E-DAT modul 24x8(8) 1RU patch panel Cat.6 <sub>A</sub> , stainless steel                                       |
| 130922-00-E    | 6 port module frame 1RU                                                                                        |
| 130922-02-E    | E-DAT modul 6x8(8) 3RU patch panel Cat.6 <sub>A</sub>                                                          |
| 130922-03-E    | E-DAT modul 6x8(8) for 1RU patch panel Cat.6 <sub>A</sub>                                                      |
| 130924-00-E    | Modul 19 inches module frame 1.5RU 48 port<br>stainless steel unequipped                                       |
| 130924-E       | E-DAT modul 48x8(8) 1.5RU patch panel Cat.6 <sub>A</sub> , stainless steel                                     |
| 130927-1200-E  | SmartConnect Patchpanel 12 ports MC module                                                                     |
| 130927-1600-E  | SmartConnect Patchpanel 16 ports MC module                                                                     |
| 130927-2400-E  | SmartConnect Patchpanel 24 ports MC module                                                                     |
| 1309427103-E   | Modul REGplus IP20 light gray unequipped                                                                       |
| 1309460003-I   | Modul IP44SG surface mounted housing unequipped                                                                |
| 1309461002-I   | E-DAT modul IP44SG flush mounted housing pure white<br>unequipped                                              |
| 1309461003-I   | E-DAT modul IP44SG flush mounted housing gray unequipped                                                       |
| 1309470002-I   | IP44 surface-mounted module housing with hinged cover<br>and lock, pure white, 2 port unequipped for MC module |
| 1309470003-I   | IP44 surface-mounted module housing with hinged cover<br>and lock, gray, 2 port unequipped for MC module       |
| 1309471002-I   | Flush-mounted module housing with hinged cover and<br>lock, pure white, 2 port unequipped for MC module        |
| 1309471003-I   | Flush-mounted module housing with hinged cover and<br>lock, gray, 2 port unequipped for MC module              |
| 1309A07003-E   | REGplus IP20 E-DAT modul coupler 180°                                                                          |
| 1309A17003-E   | REGplus IP20 E-DAT modul coupler 90°                                                                           |
| 130A088003-E   | REGplus IP20 FF UTPmodul Cat.5e                                                                                |
| 130A108003-E   | REGplus IP20 FF UTPmodul Cat.6                                                                                 |
| 130A118003-E   | REGplus IP20 FF UTPmodul Cat.6 <sub>A</sub>                                                                    |
| 130B10D10002-E | Modul wall outlet surface mounted 1 port unequipped<br>pure white 43 mm                                        |

## C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

### Accessories from

|                |                                                                               |
|----------------|-------------------------------------------------------------------------------|
| 130B10D10027-E | Modul wall outlet surface mounted 1 port unequipped<br>traffic white 43 mm    |
| 130B10D20002-E | Modul wall outlet surface mounted 2 port unequipped<br>pure white 43 mm       |
| 130B10D20027-E | Modul wall outlet surface mounted 2 port unequipped<br>traffic white 43 mm    |
| 130B10D30002-E | Modul wall outlet surface mounted 3 port unequipped<br>pure white 43 mm       |
| 130B10E2E-E    | Modul module frame 3RU, 7HP 6 port stainless steel unequipped                 |
| 130B117003-E   | REGplus IP20 C6 <sub>A</sub> modul 180°M                                      |
| 130B11P0-BK-E  | C6 <sub>A</sub> modul 24 port 180°M 1RU, black                                |
| 130B11P0-E     | C6 <sub>A</sub> modul 24 port 180°M 1RU, gray                                 |
| 130B11P1-E     | C6 <sub>A</sub> modul 24 port 180°M 1RU stainless steel                       |
| 130B11P4-E     | C6 <sub>A</sub> modul 48 port 180°M 1.5RU stainless steel                     |
| 130B127003-E   | REGplus IP20 C6 <sub>A</sub> modul 270°M                                      |
| 130B218003-E   | REGplus IP20 FF C6 <sub>A</sub> modul 180°K                                   |
| 130B228003-E   | REGplus IP20 FF C6 <sub>A</sub> modul 270°K                                   |
| 130D2CBU4-E    | DCCS2 subassembly 4 port unequipped                                           |
| 14040000-E     | MCO IP69k protective housing for outdoor use,<br>set for exposed installation |
| 14040010-E     | MCO IP69k Protective housing for outdoor use,<br>set with mounting bracket    |
| 14040100-E     | MCO IP69k Protective housing for outdoor use,<br>set wall/ housing bushing    |

# C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z


EAN 4251394608624

2026/08/21


Version: U

## Illustrations

Dimensional drawing

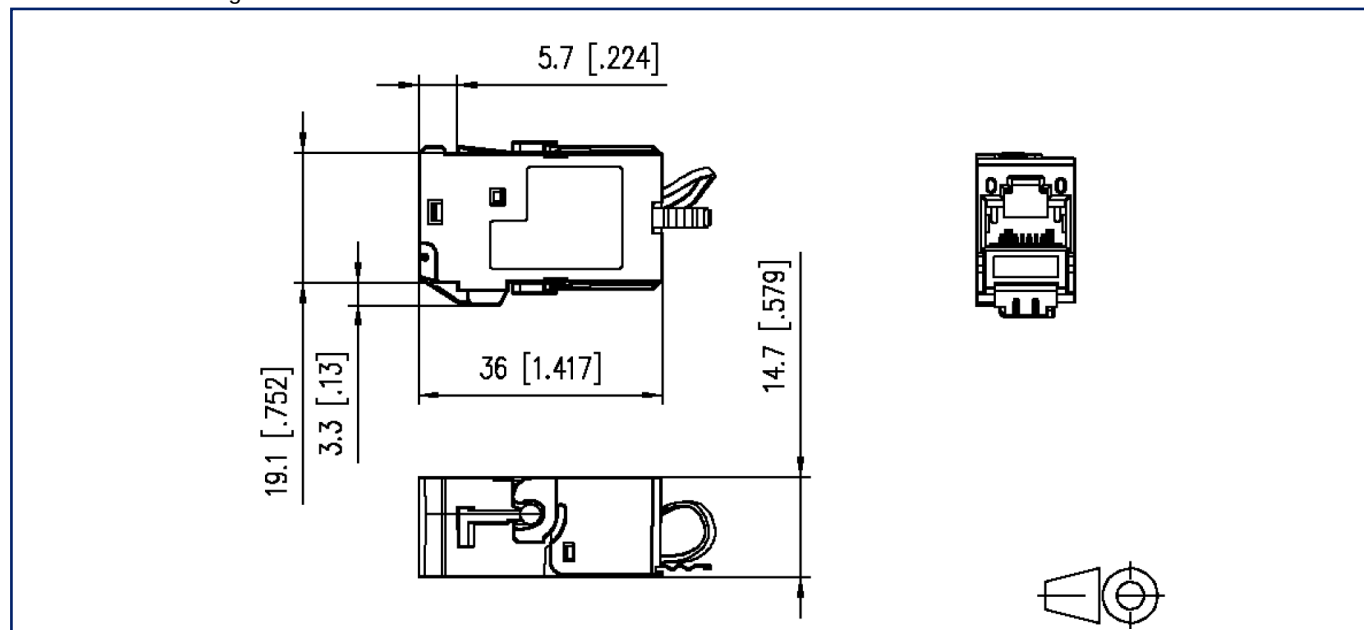

Cut-out

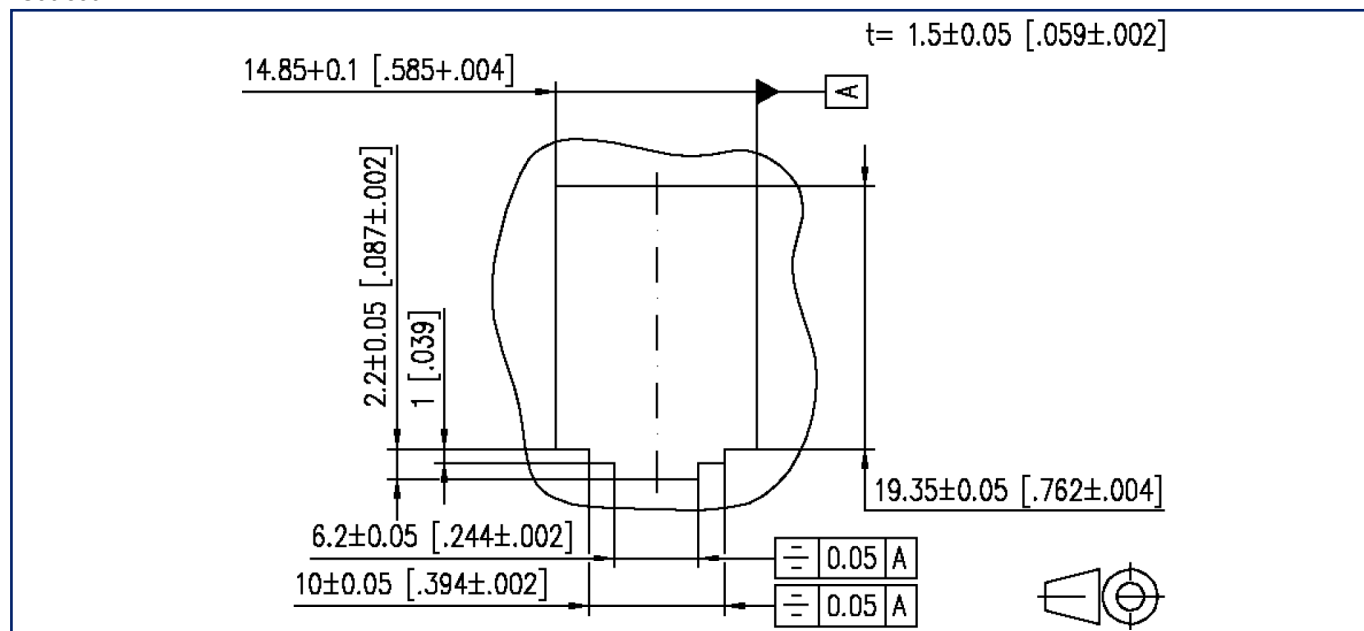

## C6<sub>A</sub>modul 180° jack (12 pcs)

P/N

130B11-Z

EAN 4251394608624

2026/08/21

Version: U

### Illustrations

#### Wiring diagram

