

Data sheet

E-DAT Industry RJ45 coupler insert Class E_A

Page 1/7

P/N

1401B00810K1

EAN 4251394690742


2026/08/21

Version: C

Illustrations



Dimensional drawing

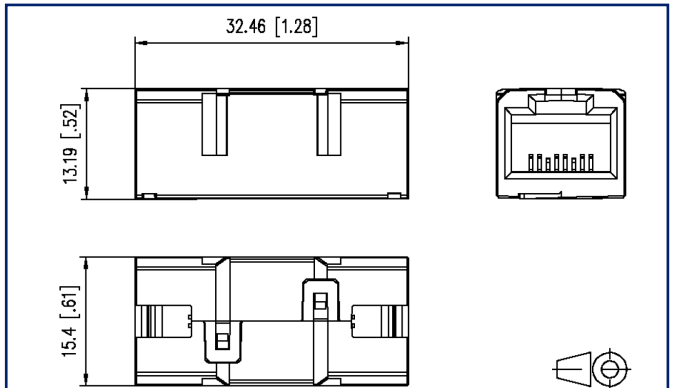

See enlarged drawings at the end of document

Product specification

- unshielded class E_A RJ45 jack for mounting in IP67 flange housings of variants 1, 4, 5 and 14
- use for ingress protection IP65 in combination with Universal test jack
- compliance with class E_A according to ISO/IEC 11801, DIN EN 50173-1
- suitable for 10 GBit/s Ethernet (IEEE 802.3an), Remote Powering (PoE, PoE plus, UPoE und 4PPoE), HDBaseT, SAT-IP and AV over IP
- especially suitable for consolidation points and cross-connect cabling
- very compact design
- symmetrical structure, can be mounted in any position



E-DAT Industry RJ45 coupler insert Class E_A

P/N

1401B00810KI

EAN 4251394690742

2026/08/21

Version: C

Technical Data

General Data

Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E1
Design	coupler / adapter (FO)
Shielding	unshielded
Transmission technology	Copper
Color	white
Dimensions	
Dimension (L x W x H)	32.51 mm x 15.6 mm x 13.19 mm
Dimension (L x W x H)	1.28 in. x 0.614 in. x 0.519 in.
Labeling option	on housing

Transmission characteristics

Class (ISO/IEC)	E _A
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
4PPoE	IEEE 802.3bt
HDBaseT	yes
SAT-IP	yes
AVoverIP	yes
Transmission rate up to 10 GBit	IEEE 802.3an

Connections/interfaces

Connector technology interface 1	RJ45-jack
Connector technology interface 2	RJ45-jack
Number of ports interface 1	1
Number of ports interface 2	1
Number of equipped ports interface 1	1
Number of ports interface 2 equipped	1
Number of positions/contacts interface 1	8P/8C



E-DAT Industry RJ45 coupler insert Class E_A

P/N

1401B00810KI

EAN 4251394690742

2026/08/21

Version: C

Technical Data

Connections/interfaces

Number of positions/contacts interface 2	8P/8C
--	-------

Electrical characteristics

Current carrying capacity	max. 1 A at 60 °C
Contact resistance	max. 20 mOhm
Insulation resistance	min. 500 MOhm
Dielectric strength conductor-conductor (secondary)	min. 1000 V DC

Mechanical data

Insertion and withdrawal force	max. 20 N
Life - Number of mating cycles	min. 750
Position/mounting of latch standard installation position	top

Materials and material properties

Material - Contact	Spring steel
Material - Contact finish	Ni + Au (nickel-gold)
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Particulate ingress	IP2X when plugged in
Liquid ingress/immersion	IPX0 when plugged in
Rapid change of temperature	-40°C / -40°F - +70°C / 158°F / 25 cycles t=30 min
Damp heat	+25°C / +77°F / +65°C / +149°F / 93% RH // -10°C / -14°F / 21 cycles
Flowing mixed gas	+25 °C / +77°F / 73% RH / 4 days, H2S / SO2
Vibration	50 m/s ²



E-DAT Industry RJ45 coupler insert Class E_A

P/N

1401B00810KI

EAN 4251394690742

2026/08/21

Version: C

Technical Data

Standards/Regulations

Generic cabling systems

General requirements ISO/IEC 11801-1:2017-11 | DIN EN 50173-1:2018-10

Connectors for electronic equipment

Free and fixed connectors DIN EN 60603-7-2:2011-03

Connectors for electronic equipment - Tests and measurements

Test standard for connectors (engaging and separating connectors under electrical load) DIN-EN 60512-99-001, DIN-EN 60512-99-002

Endurance tests IEC 60512-9-3: 03-2009

Emission proof

Climate tests IEC 60512-11

Classifications

ETIM 9.0 EC001134

ETIM 10.0 EC001134

Packing details

Type of packaging 10 pc(s) / box

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



E-DAT Industry RJ45 coupler insert Class E_A

P/N

1401B00810KI

EAN 4251394690742

2026/08/21

Version: C

Accessories from

P/N	Designation
130D2CMC6-E	DCCS2 subassembly 6 port RJ45 - cross connect
130D2CMM6-E	DCCS2 subassembly 6 port RJ45
130D2CMU6-E	DCCS2 subassembly 4 port unequipped for E-DAT Industry inserts
1401010110ME	E-DAT Industry IP67 V1 1 port metal outlet
1401010220ME	E-DAT Industry IP67 V1 2 port metal outlet
1401010620ME	E-DAT Industry IP67 V1 2 port metal surface mount housing
1401013300ME	Industry IP67 V1 metal bulkhead
1401013300ME-F5	Industry IP67 V1 metal bulkhead
1401013302KE	Industry IP67 V1 bulkhead
1401040110ME	E-DAT Industry IP67 V4 1 port metal outlet
1401040220ME	E-DAT Industry IP67 V4 2 port metal outlet
1401040620ME	E-DAT Industry IP67 V4 2 port metal surface mount housing
1401043302KE	Industry IP67 V4 bulkhead
1401060110ME	E-DAT Industry IP67 V5 1 port metal outlet
1401060320ME	E-DAT Industry IP67 V5 2 port metal surface mount housing
1401063300ME	Industry IP67 V5 metal bulkhead
14010833C0MC	E-DAT Industry IP67 V14 mounting flange, central screw mounting
14010833C0MN	E-DAT Industry IP67 V14 mounting flange, normative mounting
1401106113KE	E-DAT Industry terminal rail TS35 + RJ45 field jack insert Cat.6 Class E _A , T568A
1401206113KE	E-DAT Industry terminal rail TS35 + RJ45 coupler insert Cat.6 Class E _A
1401806113KE	E-DAT Industry terminal rail TS35 + RJ45 field jack insert Cat.6 Class E _A , T568B
1401906113KE	E-DAT Industry terminal rail TS35 + RJ45 field jack insert Cat.6 Class E _A , PROFINET
1401U06113KE	E-DAT Industry terminal rail TS35 + E-DAT Industry USB A 2.0 coupler insert
1401U16113KE	E-DAT Industry terminal rail TS35 + E-DAT Industry USB A 3.0 coupler insert
14040000-E	MCO IP69k protective housing for outdoor use, set for exposed installation
14040010-E	MCO IP69k Protective housing for outdoor use, set with mounting bracket
14040100-E	MCO IP69k Protective housing for outdoor use, set wall/ housing bushing



Data sheet

Page 6/7

E-DAT Industry RJ45 coupler insert Class E_A

P/N

1401B00810KI

EAN 4251394690742

2026/08/21

Version: C

Accessories from

140UPB-E

E-DAT Industry universal test jack IP65, unequipped



Illustrations

Dimensional drawing

