

Data sheet

Page 1/5


E-DAT Industry IP67 V14 plug housing for RJ45 unequipped

P/N
14010850C0ME
EAN 4250184123590
2026/08/25
Version: T

Illustrations



Dimensional drawing

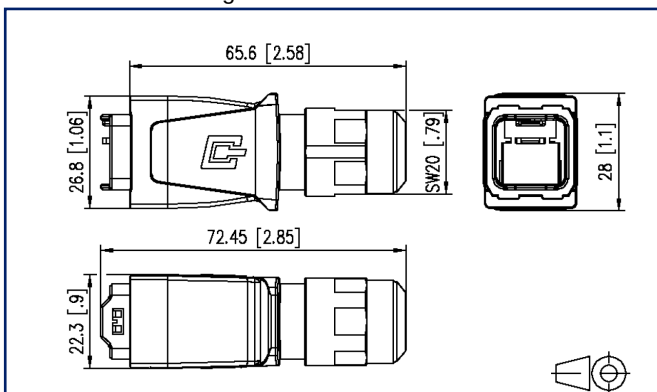

See enlarged drawings at the end of document

Product specification

- plug housing with push-pull-lock acc. to ISO/IEC 24702 and IEC 61076-3-117 var. 14
- IP67 protected housing to hold E-DAT Industry plug inserts
- increased diameter range of 10 mm for connection of cable jackets
- resistant to welding sputter
- industry-compatible metal housing with improved durability
- flammability class as per UL 94V-0
- improved resistance to chemical substances
- snap-on clip for color coding after assembly
- cable can be pushed through preassembled plug housing
- matching plug inserts E-DAT Industry RJ45 field plug insert, E-DAT Industry RJ45 plug insert
- variants: plug housing, bend-protected plug housing



Data sheet

Page 2/5

E-DAT Industry IP67 V14 plug housing for RJ45 unequipped

P/N
14010850C0ME
EAN 4250184123590
2026/08/25
Version: T

Technical Data

General Data	
Fields of application	harsh environment
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	plug housing
Color	metallike
Dimensions	
Dimension (L x W x H)	65.6 mm x 26.8 mm x 28 mm
Dimension (L x W x H)	2.583 in. x 1.055 in. x 1.102 in.
Labeling option	on housing
Marking option	by latching clip
Connections/interfaces	
Number of ports interface 2	1
Number of ports interface 2 equipped	0
Protective housing interface 1	V14
Protective housing interface 2	V14
Cable sheath diameter (min. - max.)	
Cable sheath diameter	5 mm - 10.00
Cable sheath diameter	0.197 in. - 0.394
Module plug-in direction	straight
Cable access/outlet	180°
Materials and material properties	
Material - Protective housing	GD-Zn
Material - Protective housing finish	Ni (nickel)
RoHS	compliant

Data sheet

Page 3/5

E-DAT Industry IP67 V14 plug housing for RJ45 unequipped

P/N
14010850C0ME
EAN 4250184123590
2026/08/25
Version: T

Technical Data

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Particulate ingress	IP6X
Liquid ingress/immersion	IPX7
Resistance to welding beads	yes
Increased robustness	yes
Increased chemical resistance	yes
General information	This product is suitable for use in industrial environments inside buildings with IPxy protection class according to DIN EN 60529 specified in this data sheet. Not specified for outdoor applications.

Standards/Regulations

Generic cabling systems	
Industrial area	ISO/IEC 24702
Degrees of Protection Provided by Enclosures	IEC 60529
Connectors for electronic equipment	
Rectangular connectors	DIN EN 61076-3-117

Classifications

ETIM 7.0	EC000437
ETIM 8.0	EC000437
ETIM 9.0	EC000437
ETIM 10.0	EC000437

Packing details

Type of packaging	10 pc(s) / box
-------------------	----------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

Data sheet

Page 4/5

E-DAT Industry IP67 V14 plug housing for RJ45 unequipped

P/N

14010850C0ME

EAN 4250184123590

2026/08/25

Version: T

Accessories

P/N	Designation
1401088002KI	E-DAT Industry IP67 V14 plug protection cap
1401400810-DNV	E-DAT Industry RJ45 field plug insert Cat.6 Class E _A DNV
1401400810-I	E-DAT Industry RJ45 field plug insert Cat.6 Class E _A
1401500810-I	E-DAT Industry RJ45 plug insert Cat.6 Class E _A



E-DAT Industry IP67 V14 plug housing for RJ45 unequipped

P/N

14010850C0ME

EAN 4250184123590

2026/08/25

Version: T

Illustrations

Dimensional drawing

