

Data sheet

OpDAT VADT splice 2xSC APC OS2


Page 1/6

P/N
150C029HF00XXE


2026/08/27

Version: J

Illustrations

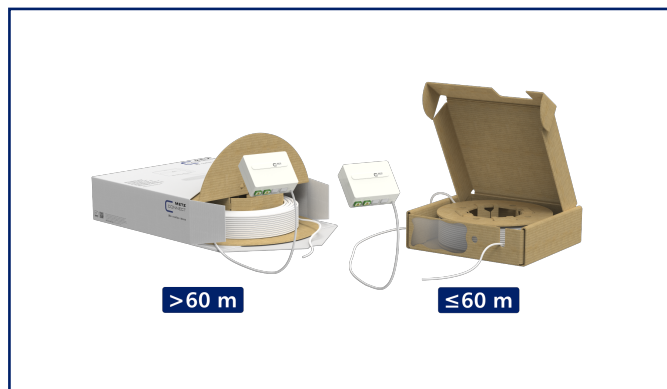

Dimensional drawing

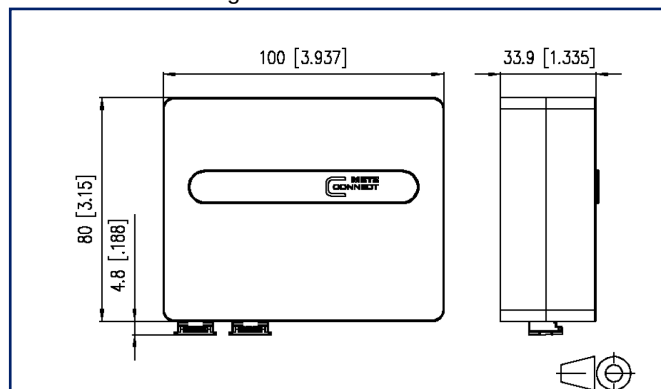

See enlarged drawings at the end of document

Product specification

- compact fiber optic termination unit for flush mounted outlets or cavity wall boxes
- Box ready for installation, pre-terminated with singlemode indoor cable and equipped with adapters including laser protection for the connection of up to four fiber optic patch cables.
- The second cable end is open to be inserted, pulled in or blown into empty tubes. Suitable for splicing or for mounting field attachable fiber optic connectors (OpDAT FAST® Hybrid).
- cable easy to mount on carton drum
- quick and easy unwinding of the cable without removing the cable drum from the outer box for cable lengths of 10 - 60 m
- Two cable types available:
- Mini Breakout Cable Compact, white, Ø 4.5 mm
- FITH cable, white, Ø 2.3 mm
- single mode fiber OS2, E9/125 µm, bend insensitive according to ITU-T G.657.A, compatible to G.652.D
- supplied with fixing material
- color box pure white (similar to RAL 9010)
- cable lengths: 5 to 100 m in 5 m steps
- (replace XX in the part number by the length, for example 05=5 m, A0=100 m)
- all available variants can be created with the VADT configurator



Data sheet

Page 2/6

OpDAT VADT splice 2xSC APC OS2

P/N
150C029HF00XXE

2026/08/27

Version: J

Technical Data

General Data

Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	wall outlet
Mounting style	AP
Transmission technology	Fiber optic
Color	white
Dimensions	
Dimension (L x W x H)	85 mm x 100 mm x 35 mm
Dimension (L x W x H)	3.346 in. x 3.937 in. x 1.378 in.
Mode type of the fiber	Singlemode
Fiber class	OS2
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm

Connections/interfaces

Connector technology interface 1	SC
Number of ports interface 1	4
Number of equipped ports interface 1	2
Number of ports with dust protection interface 1	2
Number of blind	2
Cable sheath diameter (min. - max.)	
Cable sheath diameter	4.50
Cable sheath diameter	0.177

Electrical/ optical properties

Insertion loss	max. 0,3 dB
Return loss	min. 65 dB



OpDAT VADT splice 2xSC APC OS2

P/N
150C029HF00XXE

2026/08/27

Version: J

Technical Data

Mechanical data

strain relief

aramide fibres

Materials and material properties

Material - Housing	Plastics
Material - Coupler housing	Plastics
Material - Sleeve	ceramic, slotted
Flame retardancy	yes
Halogen free	yes
RoHS	compliant

Standards/Regulations

Generic cabling systems	
General requirements	ISO/IEC 11801-1
Lichtwellenleiter: LWL-Innenkabel	
Sectional specification for class A B single-mode fibres	ISO/IEC 60793-2-50 type B.1.3 & B6_a
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods	
Fibre optic interconnecting devices and passive components - Insertion loss	IEC 61300-3-4
Fibre optic interconnecting devices and passive components - Return loss	IEC 61300-3-6
Fibre optic interconnecting devices and passive components - Visual inspection of plug end face	IEC 61300-3-35
ITU-T standard	ITU-T G.657.A1 compatible with ITU-T G.652.D

Classifications

ETIM 7.0	EC001409
ETIM 8.0	EC001409
ETIM 9.0	EC001409
ETIM 10.0	EC001409

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Data sheet

Page 4/6

OpDAT VADT splice 2xSC APC OS2

P/N
150C029HF00XXE

2026/08/27

Version: J

Technical Data

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 5/6

OpDAT VADT splice 2xSC APC OS2

P/N
150C029HF00XXE

2026/08/27

Version: J

Accessories

P/N	Designation
150800200-E	Fibre optic tool Bag
1509QAEA002C-E	OpDAT FAST™ Hybrid connector kit SC APC OS2 20 pieces for buffered fibres incl. tool
1509QAE0002C-E	OpDAT FAST™ Hybrid connector kit SC UPC OS2 20 pieces for buffered fibres incl. tool
1509QAJA002C-E	OpDAT FAST™ Hybrid connector kit LC APC OS2 20 pieces for buffered fibres incl. tool
1509QAJ0002C-E	OpDAT FAST™ Hybrid connector kit LC UPC OS2 20 pieces for buffered fibres incl. tool
151P7EAEAXXE	OpDAT patch cord SC-S APC/SC-S APC OS2, white
151P7EAJAXXE	OpDAT patch cord SC-S APC/LC-S APC OS2, white
151P7EOEAXXE	OpDAT patch cord SC-S/SC-S APC OS2, white

Data sheet
OpDAT VADT splice 2xSC APC OS2

Page 6/6

P/N
150C029HF00XXE

2026/08/27

Version: J

Illustrations

Dimensional drawing

