

Data sheet

OpDAT CM 6xLC-Q APC OS2 splice


Page 1/7

P/N
1528S97A061E
EAN 4250184195085
2026/09/01
Version: AE

Illustrations



Dimensional drawing

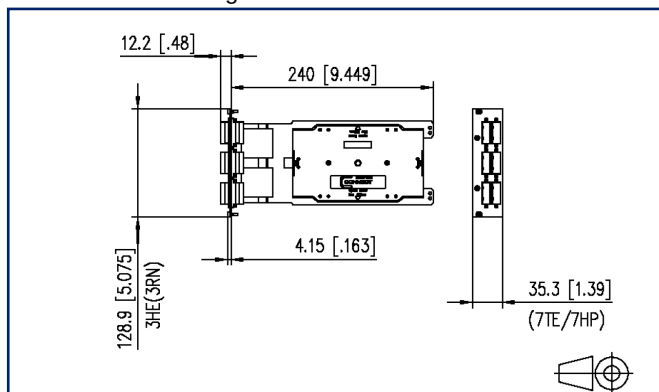

See enlarged drawings at the end of document

Product specification

- Compact module OpDAT CM 6xLC-Q 3RU/HP
- Fully equipped with 6 LC-Q adapters and 24 LC pigtails
- Pigtails with semi-tight buffered fiber dia. 0.9 mm, length 2.0 m, 12 colors
- Pigtails inserted and stripped in standard splice tray with two crimp splice holders
- Pigtails are cleaned and inserted into the adapters
- Front panel made of silver anodized aluminum, with numbered adapter positions
- Mounting plate made of steel, equipped with splice tray and overlength tray, each with a cover
- Fixing in the subassembly frame by captive screws
- Variants: equipped with LC-Q adapters in blue (OS2), green (OS2 APC), violet (OM4) or aqua (OM3)



Data sheet

Page 2/7

OpDAT CM 6xLC-Q APC OS2 splice

P/N

1528S97A061E

EAN 4250184195085

2026/09/01

Version: AE

Technical Data

General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	Compact module
Mounting style	3RU/7HP
Transmission technology	Fiber optic
Port numbering	yes
Color	green
Dimensions	
Dimension (L x W x H)	256.1 mm x 128.9 mm x 35.3 mm
Dimension (L x W x H)	10.083 in. x 5.075 in. x 1.39 in.
Inches	19 inches
Height unit	3RU
Horizontal pitch	7HP
Number of cables/ buffered fibers	24
Cable Type	pigtail(s)
Fiber class	OS2
Mode type of the fiber	Singlemode
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm
Labeling option	printed numbers

Connections/interfaces

Connector technology interface 1	LC-Q Couplers
Connector technology interface 2	LC-Q Couplers
Number of ports interface 1	6
Number of ports interface 2	6
Number of equipped ports interface 1	6
Number of ports interface 2 equipped	6
Number of ports with dust protection interface 2	6



OpDAT CM 6xLC-Q APC OS2 splice

P/N

1528S97A061E

EAN 4250184195085

2026/09/01

Version: AE

Technical Data

Connections/interfaces

Semi-tight buffered fiber pigtail length	2 m
Semi-tight buffered fiber pigtail length	6.56 ft
Semi-tight buffered fiber pigtail diameter	0.9 mm
Semi-tight buffered fiber pigtail diameter	0.035 in.

Optical characteristics

Insertion loss	max. 0,3 dB
Return loss	min. 65 dB

Mechanical data

Cut-out	SC-D, LC-Q, ST-D
Life - Number of mating cycles	min. 1000

Materials and material properties

Material - Front cover	Al (Aluminium)
Material - Front cover finish	silver anodized
Material - Mounting plate	steel
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
Halogen free	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-10 °C - 60 °C
Temperature - Storage °F	14 °F - 140 °F
Temperature - Operating °C	-10 °C - 60 °C
Temperature - Operating °F	14 °F - 140 °F



Data sheet

Page 4/7

OpDAT CM 6xLC-Q APC OS2 splice

P/N

1528S97A061E

EAN 4250184195085

2026/09/01

Version: AE

Technical Data

Standards/Regulations

Optical fibers - Interconnecting devices and passive components - basic test and measuring methods

Fibre optic interconnecting devices and passive components - Insertion loss	IEC 61300-3-4
---	---------------

Fibre optic interconnecting devices and passive components - Return loss	IEC 61300-3-6
--	---------------

Standard colours for insulation for low-frequency cables & wires	IEC 60304
--	-----------

Classifications

ETIM 7.0	EC001130
----------	----------

ETIM 8.0	EC001130
----------	----------

ETIM 9.0	EC001130
----------	----------

ETIM 10.0	EC001130
-----------	----------

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 5/7

OpDAT CM 6xLC-Q APC OS2 splice

P/N

1528S97A061E

EAN 4250184195085

2026/09/01

Version: AE

Accessories

P/N	Designation
1528SZ001-E	OpDAT CM Accessories kit 1
1528SZ002-E	OpDAT CM Accessories kit 2



Data sheet

Page 6/7

OpDAT CM 6xLC-Q APC OS2 splice

P/N

1528S97A061E

EAN 4250184195085

2026/09/01

Version: AE

Accessories from

P/N	Designation
1528SBGT19-E	OpDAT CM 19 inches/3RU subrack



Illustrations

Dimensional drawing

