

Data sheet

DCCS subassembly OS2 6xLC-Duplex


Page 1/5

P/N
130D209J00000N
EAN 4251394644943
2026/09/02
Version: E

Illustrations



Dimensional drawing

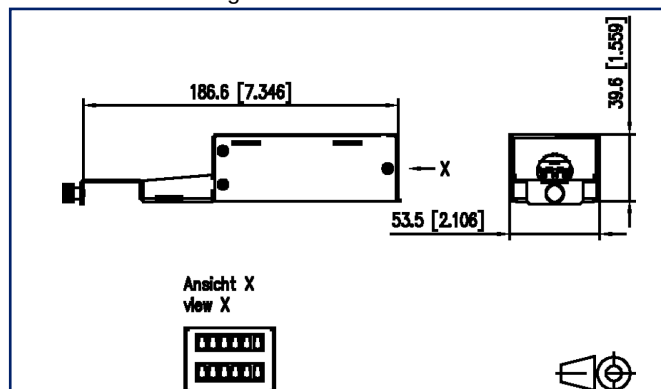

See enlarged drawings at the end of document

Product specification

- DCCS housing with 6 LC duplex adapters front mounted
- easy assembly/disassembly in DCCS subrack (19 inch, 1 RU)
- suitable for the installation of pre-terminated installation cables (Prefab) with mini breakout cables in customer specific lengths
- housing: galvanized sheet steel, stainless steel front, strain relief via M20 cable gland
- variants: blue (SM), green (SM APC), lime green (OM5), violet (OM4), aqua (OM3)
- all available variants can be created with the configurator

Data sheet

Page 2/5

DCCS subassembly OS2 6xLC-Duplex

P/N
130D209J00000N
EAN 4251394644943
2026/09/02
Version: E

Technical Data

General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	subassembly / assembly / module / unit
Mounting style	DCCS
Transmission technology	Fiber optic
Port numbering	yes
Color	blue
Dimensions	
Dimension (L x W x H)	186.6 mm x 53.5 mm x 39.6 mm
Dimension (L x W x H)	7.346 in. x 2.106 in. x 1.559 in.
Inches	19 inches
Fiber class	for OS2
Mode type of the fiber	Singlemode

Connections/interfaces

Connector technology interface 1	LC-D Couplers
Number of ports interface 1	6
Number of equipped ports interface 1	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6

Mechanical data

Cut-out	DCCS
Connector type	duplex
Life - Number of mating cycles	min. 1000
strain relief	yes

Data sheet

Page 3/5

DCCS subassembly OS2 6xLC-Duplex

P/N

130D209J00000N

EAN 4251394644943

2026/09/02

Version: E

Technical Data

Materials and material properties

Material - Assembly housing	sheet steel
Material - Assembly housing finish	Zn (zinc)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
Halogen free	yes
RoHS	compliant

Classifications

ETIM 7.0	EC001129
ETIM 8.0	EC001129
ETIM 9.0	EC001129
ETIM 10.0	EC001129

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet

Page 4/5

DCCS subassembly OS2 6xLC-Duplex

P/N

130D209J00000N

EAN 4251394644943

2026/09/02

Version: E

Accessories

P/N	Designation
130D2B1B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B1G-E	DCCS2 BGT 19 inch 1RU subrack light gray
130D2B2B-E	DCCS2 BGT 19 inches 1RU subrack black
130D2B2G-E	DCCS2 BGT 19 inches 1RU subrack light gray



DCCS subassembly OS2 6xLC-Duplex

P/N

130D209J00000N

EAN 4251394644943

2026/09/02

Version: E

Illustrations

Dimensional drawing

