


Data sheet

OpDAT REGpro blister 12xST-S OS2


Page 1/5

P/N
15024A901120E
EAN 4251394637983
2026/09/02
Version: I

Illustrations

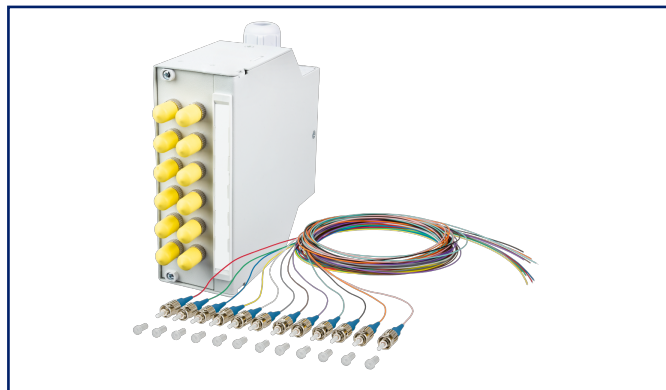

Dimensional drawing

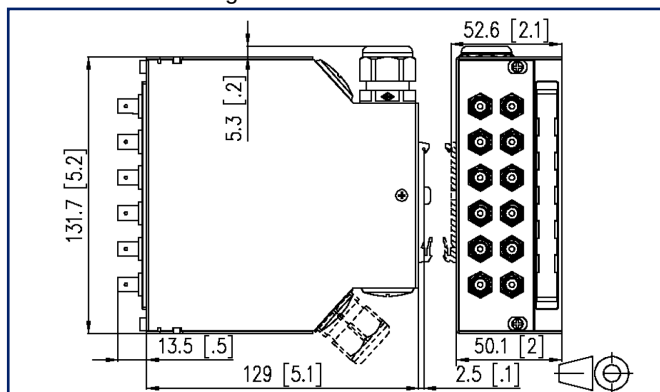

See enlarged drawings at the end of document

Product specification

- Compact distributor housing for TH35 top hat rail systems
- suitable for splicing installation cables
- simple handling through single pigtails
- equipped with ST-S adapters
- Pigtails arranged in blister
- pigtails with semi-tight buffered fiber dia. 0.9 mm, 12 colors, secondary and primary coating in the same color, length 2.0 m
- Front area with identification strips
- Various mounting positions on the top hat rail system possible
- Cable insertion from above or below, straight or inclined, suitable for M20 strain relief (up to 2 possible)
- one cable gland M20 with strain relief included in the delivery
- unoccupied adapter recesses are closed with blind plugs
- Housing made from sheet steel, powder coated (light gray, RAL 7035)
- variants: equipped with a maximum of 12 ST-S adapters



Data sheet

Page 2/5

OpDAT REGpro blister 12xST-S OS2

P/N

15024A901120E

EAN 4251394637983

2026/09/02

Version: I

Technical Data

General Data

Fields of application	structured building cabling office areas harsh environment
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	Splice distributor - blister
Mounting style	Standard rail TH35
Transmission technology	Fiber optic
Color	gray
Dimensions	
Dimension (L x W x H)	134 mm x 50 mm x 137 mm
Dimension (L x W x H)	5.276 in. x 1.969 in. x 5.394 in.
Height unit	3RU
Horizontal pitch	7HP
Weight	800 g
Weight	1.7637 lb
Number of cables/ buffered fibers	12
Cable Type	pigtail(s)
Fiber class	OS2
Mode type of the fiber	Singlemode
Shape	UPC (Ultra Physical Contact)
Fiber construction	9/125 µm
Labeling option	label strip / labeling strip

Connections/interfaces

Connector technology interface 1	ST-S Couplers
Connector technology interface 2	ST-S Couplers
Number of ports interface 1	12
Number of ports interface 2	12
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12



Data sheet

Page 3/5

OpDAT REGpro blister 12xST-S OS2

P/N

15024A901120E

EAN 4251394637983

2026/09/02

Version: I

Technical Data

Connections/interfaces

Number of ports with dust protection interface 2	12
Semi-tight buffered fiber pigtail length	2 m
Semi-tight buffered fiber pigtail length	6.56 ft
Semi-tight buffered fiber pigtail diameter	0.9 mm
Semi-tight buffered fiber pigtail diameter	0.035 in.
Cable access/outlet	from top or bottom, straight or inclined

Optical characteristics

Insertion loss	max. 0,4 dB
Return loss	min. 50 dB

Mechanical data

Cut-out	ST
Connector type	simplex
Life - Number of mating cycles	min. 1000
strain relief	M gland

Materials and material properties

Material - Housing	sheet steel
Material - Housing finish	powder-coated
Material - Assembly housing	sheet steel
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Material - Sleeve	ceramic, slotted
Material - Coupler housing	metal
Material - Standard rail mounting support	Al (Aluminium)
Material - Dust protection	PC (polycarbonate)
Halogen free	yes
RoHS	compliant



OpDAT REGpro blister 12xST-S OS2

P/N
15024A901120E
EAN 4251394637983
2026/09/02
Version: I

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C	-20 °C - 60 °C
--------------------------	----------------

Temperature - Storage °F	-4 °F - 140 °F
--------------------------	----------------

Temperature - Operating °C	-20 °C - 60 °C
----------------------------	----------------

Temperature - Operating °F	-4 °F - 140 °F
----------------------------	----------------

Standards/Regulations

FO connector interfaces	IEC 61754-2
-------------------------	-------------

Optical fibers: Indoor optical cables

Sectional specification for class B single-mode fibres	ISO/IEC 60793-2-50 type B6_a/B6_b
--	-----------------------------------

Standard colours for insulation for low-frequency cables & wires	IEC 60304
--	-----------

ITU-T standard	ITU-T G.657.A compatible with ITU-T G.652.D
----------------	---

Classifications

ETIM 7.0	EC001130
----------	----------

ETIM 8.0	EC001130
----------	----------

ETIM 9.0	EC001130
----------	----------

ETIM 10.0	EC001130
-----------	----------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

OpDAT REGpro blister 12xST-S OS2

P/N

15024A901120E

EAN 4251394637983

2026/09/02

Version: I

Illustrations

Dimensional drawing

