

Data sheet

MR-SM4u Modbus RTU

Page 1/10

P/N

11084115

EAN 4251394695273


2026/08/24

Version: B


Illustrations



Dimensional drawing

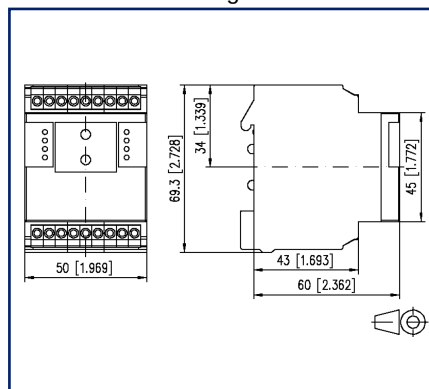

Wiring diagram

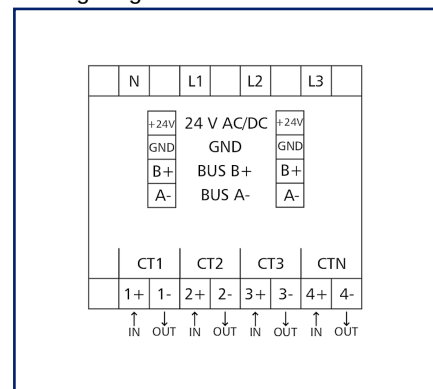

See enlarged drawings at the end of document

Product specification

The MR-SM4u module is a Modbus RTU energy meter designed for use in building and industrial applications. Current, voltage, active power, reactive power, apparent power, and other relevant energy parameters can be measured for up to 3 phases plus neutral (L1, L2, L3, N) using current transformers with 333 mV secondary voltage or Rogowski coils with 50 mV secondary voltage. The values can be retrieved via a Modbus master. The module address, baud rate, and parity are set via two rotary switches on the front side of the module or via software. Suitable for decentralized mounting on a TH35 mounting rail according to IEC 60715 in electrical distribution cabinets.

- Connection with screw type terminal blocks

Data sheet

MR-SM4u Modbus RTU

Page 2/10

P/N
11084115
EAN 4251394695273
2026/08/24
Version: B

Technical Data

Meter characteristics	
Phase voltage (RMS)	L1-N, L2-N, L3-N
Peak voltage	L1-N, L2-N, L3-N
Line voltage (RMS)	L1-L2, L1-L3, L2-L3
Peak voltage across the outer conductor	L1-L2, L1-L3, L2-L3
Phase current (RMS)	L1, L2, L3
Neutral current (RMS) (measured)	yes
Power frequency	yes
Active power (W)	L1, L2, L3
Reactive power (VAR)	L1, L2, L3
Apparent power (VA)	L1, L2, L3
Power factor (Cos phi)	L1, L2, L3, total (L1+L2+L3)
Power factor Cos phi (min., max.)	L1, L2, L3
Crest factor	L1, L2, L3, total (L1+L2+L3)
Bidirectional energy (kWh) (positive/negative)	L1, L2, L3, total
Tan phi	L1, L2, L3, total
Distortion factor (THD)	L1, L2, L3, I1, I2, I3
Active power (min., max.)	L1, L2, L3, total
Internal temperature	yes
RS485 interface	
Protocol	Modbus RTU
Address range	00 - 99
Bus interface	RS485 two wire bus
Transmission parameters	
Transmission rate	min. 1200 Bit/s (Bd) max. 115200 Bit/s (Bd)
Transmission rate default setting	19200 Bit/s (Bd)
Parity	Odd Even (default setting) None
Stopbits	1
Topology	Bus / Route
Cabling	Equipotential bonding must be provided on site. The bus must be terminated on site with a 120-ohm resistor.

Data sheet

MR-SM4u Modbus RTU

Page 3/10

P/N
11084115
EAN 4251394695273
2026/08/24
Version: B

Technical Data

Supply	
Operating voltage	24 V AC/DC +/- 10 %
Power consumption	
Power consumption AC (max.)	50 mA
Power consumption DC (max.)	30 mA
Duty cycle relative	100 %
Measurement inputs	
Current measurement (analog)	1+, 1-, 2+, 2-, 3+, 3-, 4+, 4- (converter with voltage output/Rogowski coil)
Secondary side of the converter	333 mV/250 mV/225 mV/50 mV/22,5 mV AC
Reference voltage Un	333 mV
Limit voltage Umax	400 mV
Inrush voltage Ust	< 1 mV
Voltage measurement (analog)	L1, L2, L3 (direct measurement)
Voltage range (measurement inputs)	184 V - 265 V AC
Power frequency	50 ± 5 % Hz
Measurement accuracy	corresponds to Class B
Isolation coordination	
Surge category	III
Degree of contamination	2
Rated surge voltage	4 kV
Operating altitude	<= 2000 m above sea level
Type of insulation	reinforced insulation
Housing	
Dimensions	
Dimension (W x H x D)	50 mm x 69.3 mm x 60 mm
Dimension (W x H x D)	1.969 in. x 2.728 in. x 2.362 in.
Weight	100 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	The maximum quantity of Modbus modules connected side-by-side is limited to 15 or to a maximum power consumption of 2 Amps (AC or DC) per connection to the power supply. For any similar block of additional modules a separate connection to the power supply is necessary, without distance
Connection type	Screw type terminal blocks

Data sheet

MR-SM4u Modbus RTU

Page 4/10

P/N
11084115
EAN 4251394695273
2026/08/24
Version: B

Technical Data

Housing	
Indicator	green and red LED
Terminal blocks	
Supply and bus	
Terminal block	4-pole
Solid wire (AWG)	max. 1.5 mm ² / max. 16 AWG
Stranded wire (AWG)	max. 1 mm ² / max. 18 AWG
Wire diameter	min. 0.3 mm max. 1.4 mm
Housing connection	
Wire cross section solid	0.34 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section multi	0.25 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section with wire ferrule	0.25 mm ² - 2.5 mm ² / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm
Protection circuit	Polarity reversal protection for DC operating voltage Protection against interchanging power supply and bus
Material	
Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polycarbonat
Protection category according to IEC 60529	
Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20
Protection category - device (acc. to IEC 60529)	IP20

Data sheet

MR-SM4u Modbus RTU

Page 5/10

P/N
11084115
EAN 4251394695273
2026/08/24
Version: B

Technical Data

Climatic Data

Operating

Temperature - Operating °C	-5 °C - 55 °C
Temperature - Operating °F	23 °F - 131 °F
Relative humidity	max. 85 % non-condensing

Storage

Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F

Classifications

ETIM 9.0	EC000794
ETIM 10.0	EC000794

Standards

Device safety	EN 61010-1, EN 61010-1:2010, EN 61010-1:2010/A1:2019/AC:2019-04, EN 61010-1:2010/A1:2019
Related harmonized standards	EN IEC 61010-2-030:2021, EN IEC 61010-2-030:2021/A11:202
EMC	EN 61326-1:2021
Harmonized standards	EN 61326-1:2013
Immunity to interference	Device for industrial environments
Cable length to the converter input	max. 30 m
Interference	Class B, Group 1

Environment

RoHS	2011/65/EU
REACH	1907/2006

Software and additional documents

Software and documentation	Further documentation is available for free download at www.metz-connect.com
----------------------------	--

Data sheet

Page 6/10

MR-SM4u Modbus RTU

P/N

11084115

EAN 4251394695273

2026/08/24

Version: B

Technical Data

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet
MR-SM4u Modbus RTU

Page 7/10

P/N
11084115
EAN 4251394695273
2026/08/24
Version: B

Accessories

P/N	Designation
1101810511	Current transformer 50 A/333 mV
1101810512	Current transformer 100 A/333 mV

Data sheet
MR-SM4u Modbus RTU

Page 8/10

P/N
11084115
EAN 4251394695273
2026/08/24
Version: B

Accessories from

P/N	Designation
110561	Power supply NG4 24 V DC
11056170	Power supply NG4-F 24 V DC
11083001	MR-GW Modbus RTU / Modbus TCP Gateway
1108300170	MR-F-GW Modbus RTU / Modbus TCP Gateway
110930	EWIO ₂ -M M-Bus
110935	EWIO ₂ -M-BM M-Bus / BACnet / Modbus

Data sheet


MR-SM4u Modbus RTU

Page 9/10


P/N
11084115
EAN 4251394695273
2026/08/24
Version: B

Illustrations

Dimensional drawing

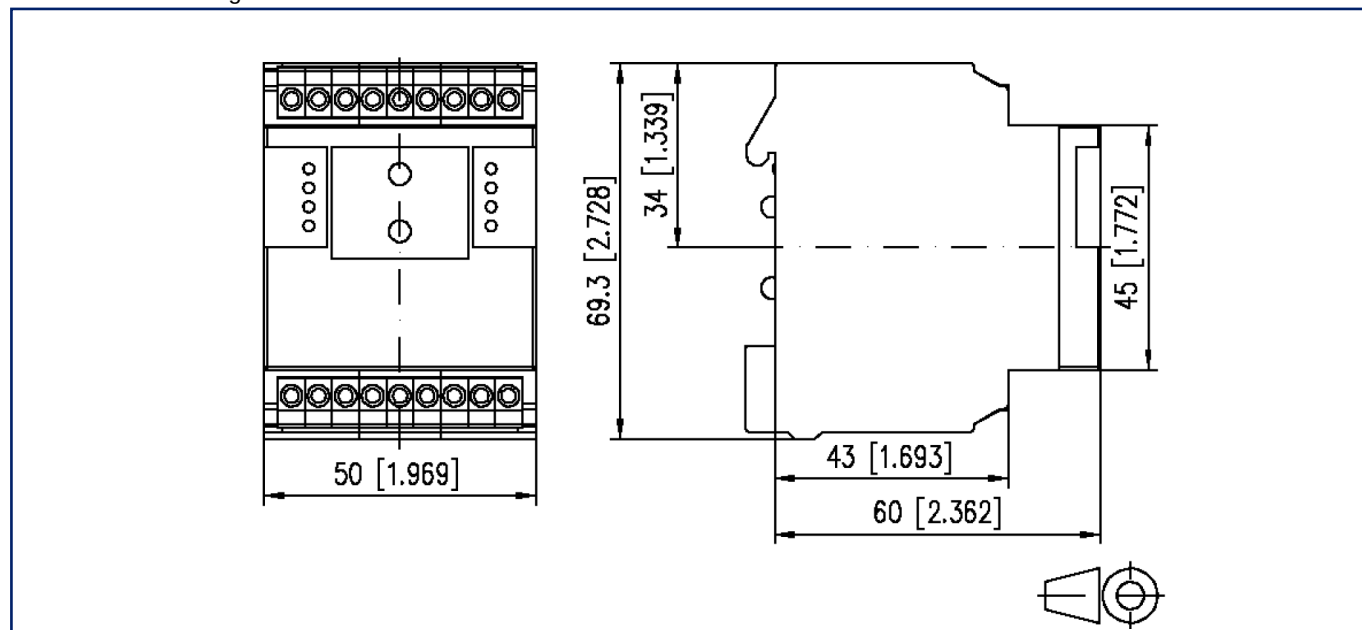

Wiring diagram

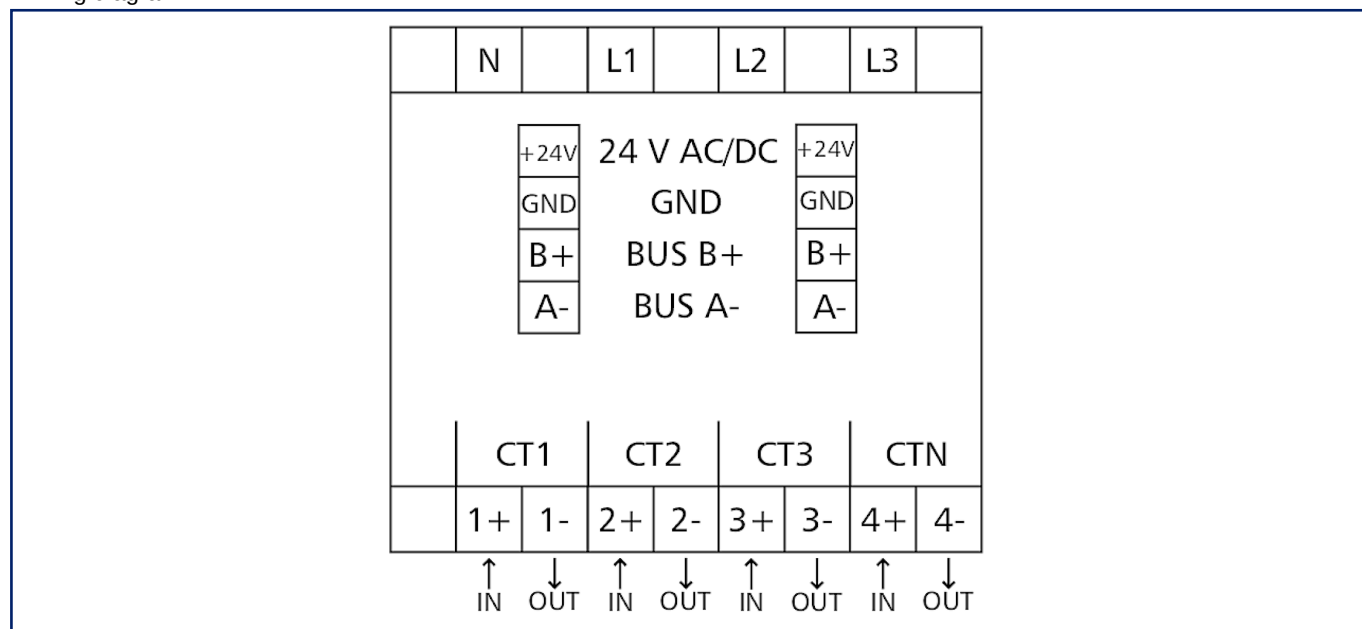

MR-SM4u Modbus RTU

P/N

11084115

EAN 4251394695273

2026/08/24

Version: B

Illustrations

Principle diagram

