

Data sheet

KRS-F-E08 HR3 24 V AC/DC

Page 1/6

P/N

11066570

EAN 4251394628400


2026/09/22

Version: K

Illustrations



Dimensional drawing

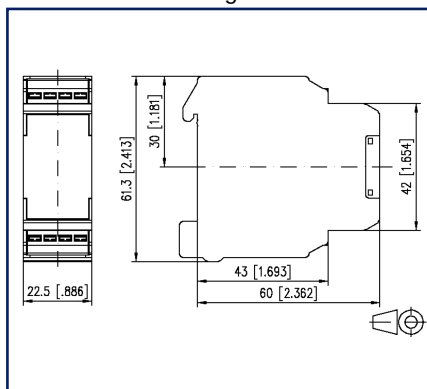

Wiring diagram

A1	B1	Y	A2
24	11	12	B2

A1 - A2
operating voltage
24 V AC/DC
B1 - B2
manual checkback
function
YR
signal input
11 - 12 - 24
output contact
1 changeover

See enlarged drawings at the end of document

Product specification

The threshold gate switches units, pumps, fans, burners, etc. As soon as the input voltage reaches the switching threshold, the relay is activated. When the input voltage falls below the switch-off threshold, the relay is released again. The module is designed for a two-level control by means of an analog 0 to 10 V DC control signal.

- Connection with spring clamp terminal blocks (push-in)
- Control signal 0 V DC = Level 1 active
- Control signal 5 V DC = No level is active (OFF)
- Control signal 10 V DC = Level 2 active
- with manual control level



Data sheet

Page 2/6

KRS-F-E08 HR3 24 V AC/DC

P/N

11066570

EAN 4251394628400

2026/09/22

Version: K

Technical Data

Supply

Operating voltage	24 V AC/DC -10% ... +10%
Power consumption AC (max.)	100 mA
Power consumption DC (max.)	35 mA
Duty cycle relative	100 %
Response time typical	20 ms
Release time typical	20 ms

Manual control level

Mechanical life	3x10 ⁴ switchings
Switching capacity (max.)	24 V AC/DC / 1 A

Inputs

Power consumption	
Power consumption at 10 V DC	1 mA

Outputs

Contacts	1 changeover contact with 0 position
Contact material	AgSnO ₂
Switching voltage (max.)	250 V AC
Continuous Current	4 A
Switching frequency	1200 switching cycles/h
Breaking capacity (resistive load)	
Mechanical life	1x10 ⁷ switching cycles
Electrical life	1x10 ⁵ switching cycles
Indicator	Level 1: yellow LED, Level 2: green LED

Insulation coil - contact set

Nominal voltage of the power supply system	230 / 400 V AC
Overvoltage category	III II
Degree of pollution	2 2
Rated test voltage	4 kV 2.5 kV
Type of insulation	basic insulation reinforced insulation



Data sheet

Page 3/6

KRS-F-E08 HR3 24 V AC/DC

P/N

11066570

EAN 4251394628400

2026/09/22

Version: K

Technical Data

Housing

Dimensions

Dimension (W x H x D)	22.5 mm x 61.3 mm x 60 mm
Dimension (W x H x D)	0.886 in. x 2.413 in. x 2.362 in.
Weight	70 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance
Connection type	Spring clamp terminal blocks

Terminal blocks

Wire cross section solid	0.2 mm ² - 2.5 mm ² / AWG 24-14
Wire cross section multi	0.25 mm ² - 2.5 mm ² / AWG 24-12
Wire cross section with wire ferrule	0.25 mm ² - 1.5 mm ² / AWG 24-16
Stripping length (min.)	8 mm

Material

Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polyamid 6.6 V0

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Climatic Data

Operating

Temperature - Operating °C	-10 °C - 50 °C
Temperature - Operating °F	14 °F - 122 °F
Relative humidity	max. 85 % non-condensing

Storage

Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F



Data sheet

Page 4/6

KRS-F-E08 HR3 24 V AC/DC

P/N

11066570

EAN 4251394628400

2026/09/22

Version: K

Technical Data**Power loss**

Power loss (typical)	1.2 W
----------------------	-------

Classifications


ETIM 7.0	EC001437
ETIM 8.0	EC001437
ETIM 9.0	EC001437
ETIM 10.0	EC001437

Application note


This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

Illustrations

Dimensional drawing

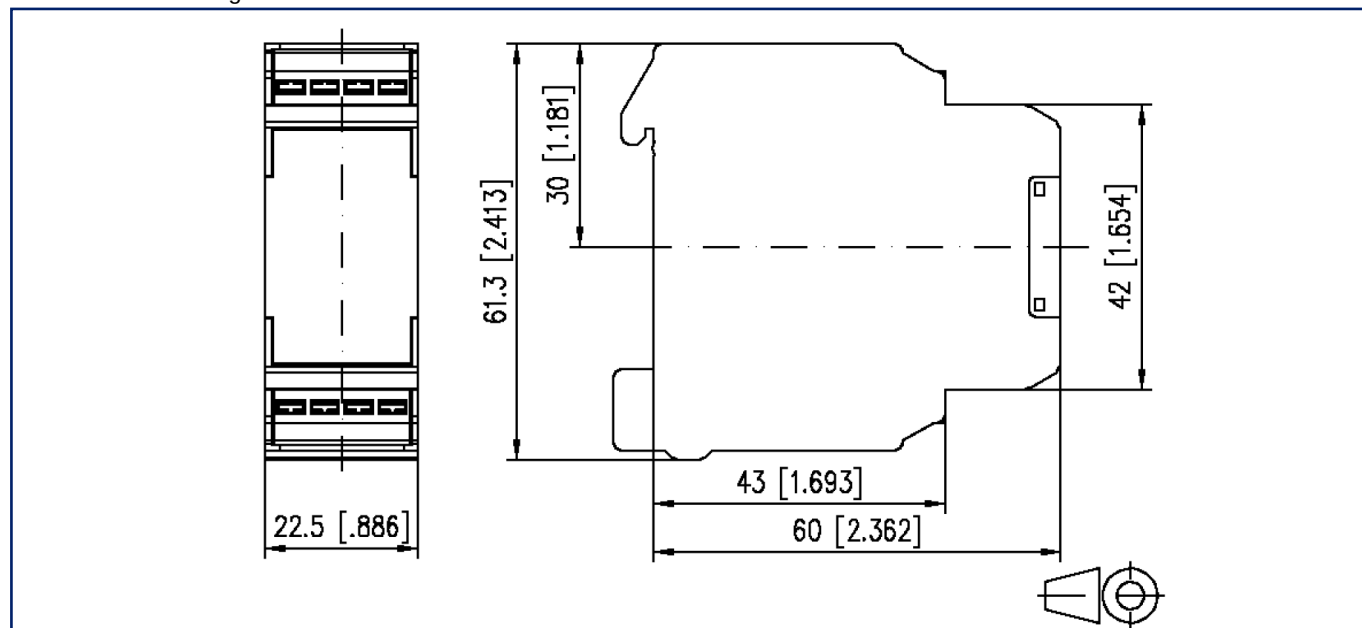

Wiring diagram

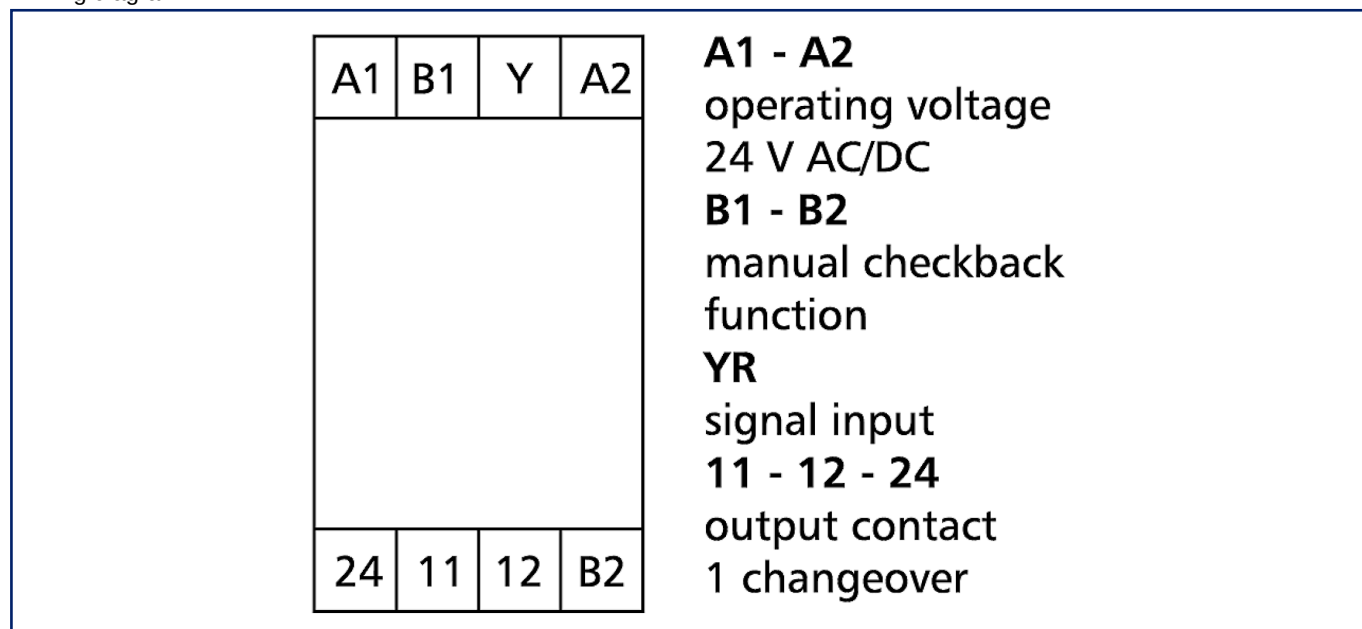

Data sheet

KRS-F-E08 HR3 24 V AC/DC

Page 6/6

P/N

11066570


EAN 4251394628400

2026/09/22

Version: K

Illustrations

Circuit diagram

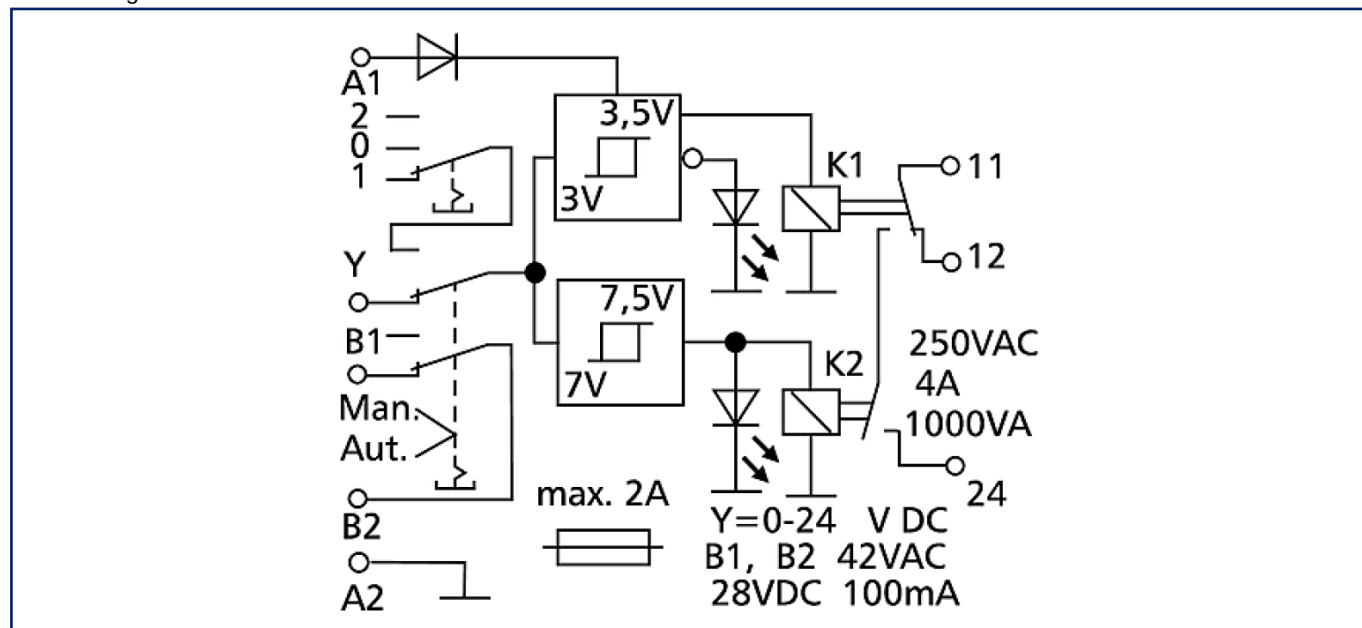

Function diagram

