

Data sheet

ENW-E12, 24 V AC

Page 1/8

P/N
11030810

EAN 4250184121251


2026/09/23

Version: K


Illustrations



Dimensional drawing

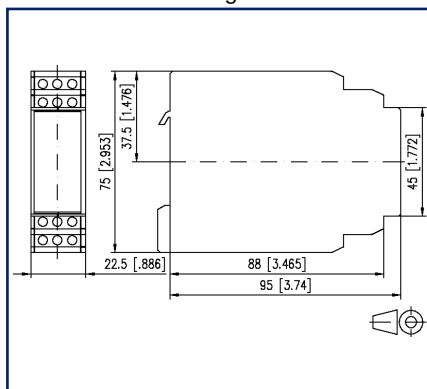

Wiring diagram



See enlarged drawings at the end of document

Product specification

The level sensor monitors filling levels or leakage of all conductive, noncombustible media. The trigger can be adjusted by means of a proportional potentiometer. As monitor, the device works with an electrode (EO) and the ground connection (EM), e.g. for minimum and maximum levels, to protect submersible pumps from overflowing or running dry. If the surface of the fluid is subject to disturbance, we recommend another electrode (EU). As two-level controller, the device controls pumps or valves for automatically filling and emptying containers by means of the EO and EU electrodes and the EM ground connection. A container wall, being conductive to the medium, can also be used as ground connection. With 2 electrodes connected the contacts B2 and B3 must be connected with a bridge! Variant: 24 V AC

Data sheet

ENW-E12, 24 V AC

Page 2/8

P/N
11030810
EAN 4250184121251
2026/09/23
Version: K

Technical Data

Supply

Operating voltage	24 V AC -10% ... +10%
Frequency range	50 ... 60 Hz
Recovery time	>= 250 ms

Inputs

Response delay	5 - 50 kOhm, adjustable
Release time typical	20 ms
Shutter release delay	<= +/- 0.01 %

Outputs

Contacts	2 changeover contacts
Contact material	AgSnO ₂
Switching voltage (max.)	250 V
Continuous Current	6 A
Switch-off delay	230 V~ 6 A AC1, 230 V~ 3 A AC3, 230 V~ 0,12 A, 60 V~ 0,6 A, 24 V~ 3 A, 12 V~ 4 A DC1
Switching frequency	600 switching cycles/h
Mechanical life	3x10 ⁷ switching cycles
Electrical life	2x10 ⁵ switching cycles
Indicator	green LED

Insulation coil - contact set

Nominal voltage of the power supply system	230 / 400 V AC
Overvoltage category	III II
Degree of pollution	2 2
Rated test voltage	4 kV 2.5 kV
Type of insulation	basic insulation reinforced insulation

Housing

Dimensions	
Dimension (W x H x D)	22.5 mm x 75 mm x 95 mm
Dimension (W x H x D)	0.886 in. x 2.953 in. x 3.74 in.
Weight	300 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance
Connection type	Screw type terminal blocks

Data sheet

ENW-E12, 24 V AC

Page 3/8

P/N
11030810
EAN 4250184121251
2026/09/23
Version: K

Technical Data

Terminal blocks

Wire cross section solid	0.2 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section multi	0.25 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section with wire ferrule	0.25 mm ² - 2.5 mm ² / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm

Material

Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polyamid 6.6 V0

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Climatic Data

Operating

Temperature - Operating °C	0 °C - 55 °C
Temperature - Operating °F	32 °F - 131 °F
Relative humidity	max. 85 % non-condensing

Storage

Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F

Power loss

Power loss (typical) coil	2 W
Power loss (typical) Contact rate	500 mW

Classifications

ETIM 7.0	EC001447
ETIM 8.0	EC001447
ETIM 9.0	EC001447
ETIM 10.0	EC001447

Data sheet
ENW-E12, 24 V AC

Page 4/8

P/N
11030810

EAN 4250184121251

2026/09/23

Version: K

Technical Data

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet
ENW-E12, 24 V AC

Page 5/8

P/N
11030810
EAN 4250184121251
2026/09/23
Version: K

Accessories

P/N	Designation
11032401	Submersible electrode TE2
110329	Leakage sensor LKS1
11032901	Leakage sensor LKS1 brown
11032902	Leakage sensor LKS-ZD black




Data sheet
ENW-E12, 24 V AC

Page 6/8

P/N
11030810
EAN 4250184121251
2026/09/23
Version: K

Illustrations

Dimensional drawing

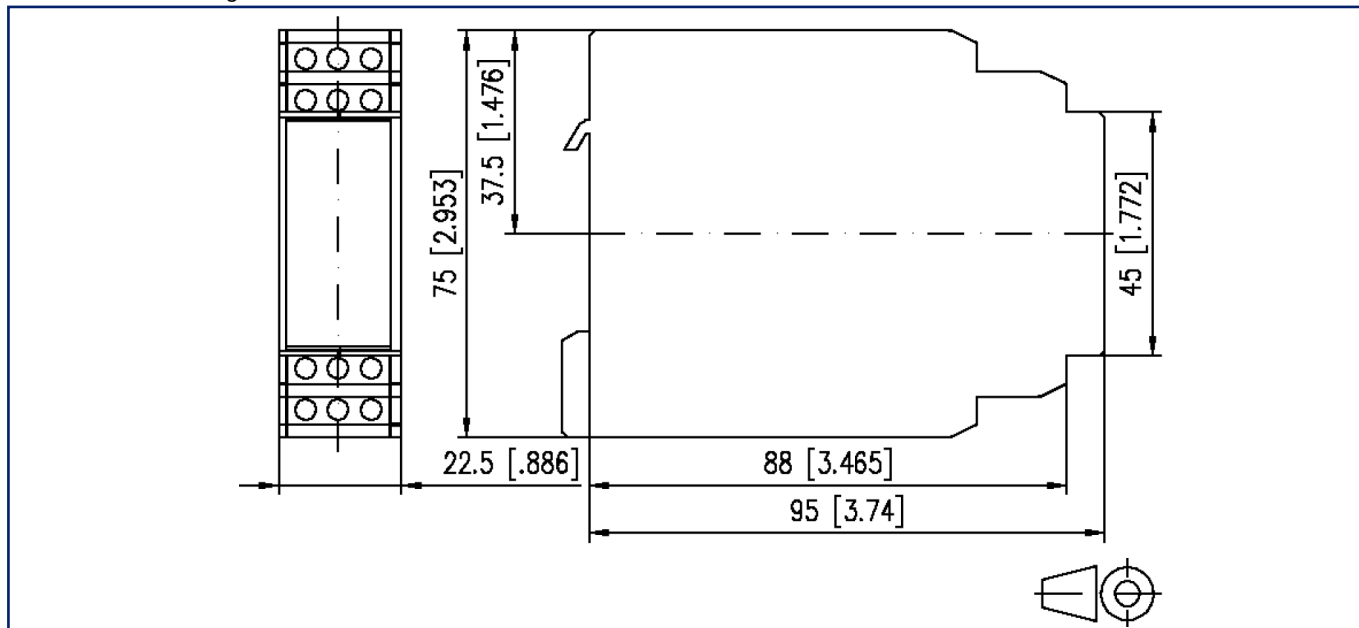

Wiring diagram

A1	14	12
11		B3
21	24	22
11	14	12
B3	B1	A1
B2		
A2		
24	B1	B2
21	22	A2

A1 - A2

Operating voltage

11-12-14 / 21-22-24

Output contacts
2 change overs

B1-B2-B3

Electrode inputs



Data sheet ENW-E12, 24 V AC

Page 7/8


P/N
11030810
EAN 4250184121251
2026/09/23
Version: K

Illustrations

Connection example

Anschlussbeispiel / Connection example / Exemple de connexion


2x Tauchelektrode TE2
Submersible electrode TE2
Électrode submersible TE2

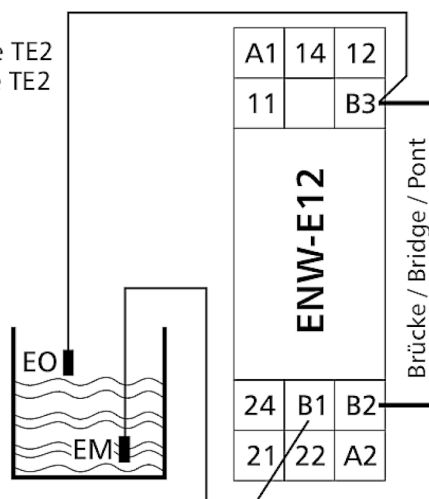

Connection example

Anschlussbeispiel / Connection example / Exemple de connexion

3x Tauchelektrode TE2
Submersible electrode TE2
Électrode submersible TE2

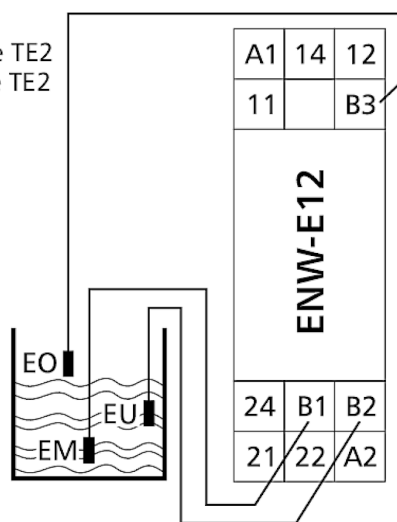

Data sheet
ENW-E12, 24 V AC

Page 8/8

P/N
11030810
EAN 4250184121251
 2026/09/23
 Version: K

Illustrations

Function diagram

