

Data sheet

SMM-E16, 24 V AC/DC

Page 1/6

P/N
11051813

EAN 4250184122388


2026/09/23

Version: K


Illustrations



Dimensional drawing

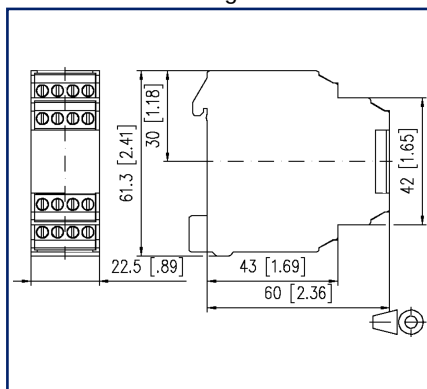

Wiring diagram

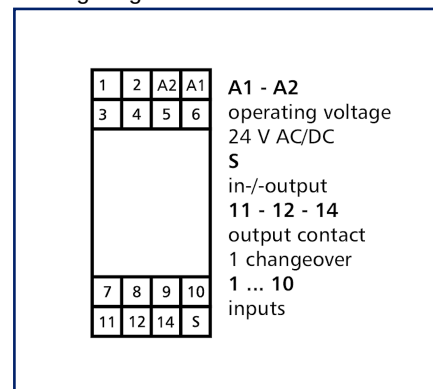

See enlarged drawings at the end of document

Product specification

The annunciator module can indicate to 10 incoming messages by means of a relay. The relay is activated as soon as a voltage is applied to min. one of the 10 inputs. The supply voltage has to be applied continuously to the terminals L1 - N. Several modules with the same voltage can be grouped over the input/output S. As soon as one relay of the modules is activated, all other relays of the modules operated in parallel are activated.

- Cascade connection of the devices possible
- 10 signal inputs
- Connection with screw-type terminals



Data sheet

SMM-E16, 24 V AC/DC

Page 2/6

P/N
11051813
EAN 4250184122388
2026/09/23
Version: K

Technical Data

Supply

Operating voltage	24 V AC/DC
Power consumption (max.)	20 mA
Response time typical	10 ms
Release time typical	5 ms

Inputs

Power consumption	
Power consumption at 24 V DC	20 mA
Power consumption at 10 V DC	20 mA
Input voltage (1 ... 10)	230 V AC
Input current (1 ... 10)	3 mA

Outputs

Contacts	1 changeover contact
Contact material	AgSnO ₂
Switching voltage (max.)	250 V AC
Continuous Current	6 A
Switching frequency	1200 switching cycles/h
Breaking capacity (resistive load)	
Mechanical life	1x10 ⁷ switching cycles
Electrical life	1x10 ⁵ switching cycles

Insulation coil - contact set

Nominal voltage of the power supply system	230 / 400 V AC
Overvoltage category	III II
Degree of pollution	2 2
Rated test voltage	4 kV 2.5 kV
Type of insulation	basic insulation reinforced insulation

Housing

Dimensions	
Dimension (W x H x D)	22.5 mm x 61.3 mm x 60 mm
Dimension (W x H x D)	0.886 in. x 2.413 in. x 2.362 in.
Weight	70 g
Mounting style	Standard rail TH35
Mounting position	any

Data sheet

SMM-E16, 24 V AC/DC

Page 3/6

P/N
11051813
EAN 4250184122388
2026/09/23
Version: K

Technical Data

Housing

Apposition	without distance
Connection type	Screw type terminal blocks

Terminal blocks

Wire cross section solid	0.34 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section multi	0.34 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section with wire ferrule	0.34 mm ² - 2.5 mm ² / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm

Material

Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0

Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Climatic Data

Operating	
Temperature - Operating °C	-10 °C - 55 °C
Temperature - Operating °F	14 °F - 131 °F
Relative humidity	max. 85 % non-condensing
Storage	
Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F

Classifications

ETIM 7.0	EC000683
ETIM 8.0	EC000683
ETIM 9.0	EC000683
ETIM 10.0	EC000683



Data sheet

Page 4/6

SMM-E16, 24 V AC/DC

P/N

11051813

EAN 4250184122388

2026/09/23

Version: K

Technical Data

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.




Data sheet SMM-E16, 24 V AC/DC

Page 5/6

P/N
11051813
EAN 4250184122388
2026/09/23
Version: K

Illustrations

Dimensional drawing

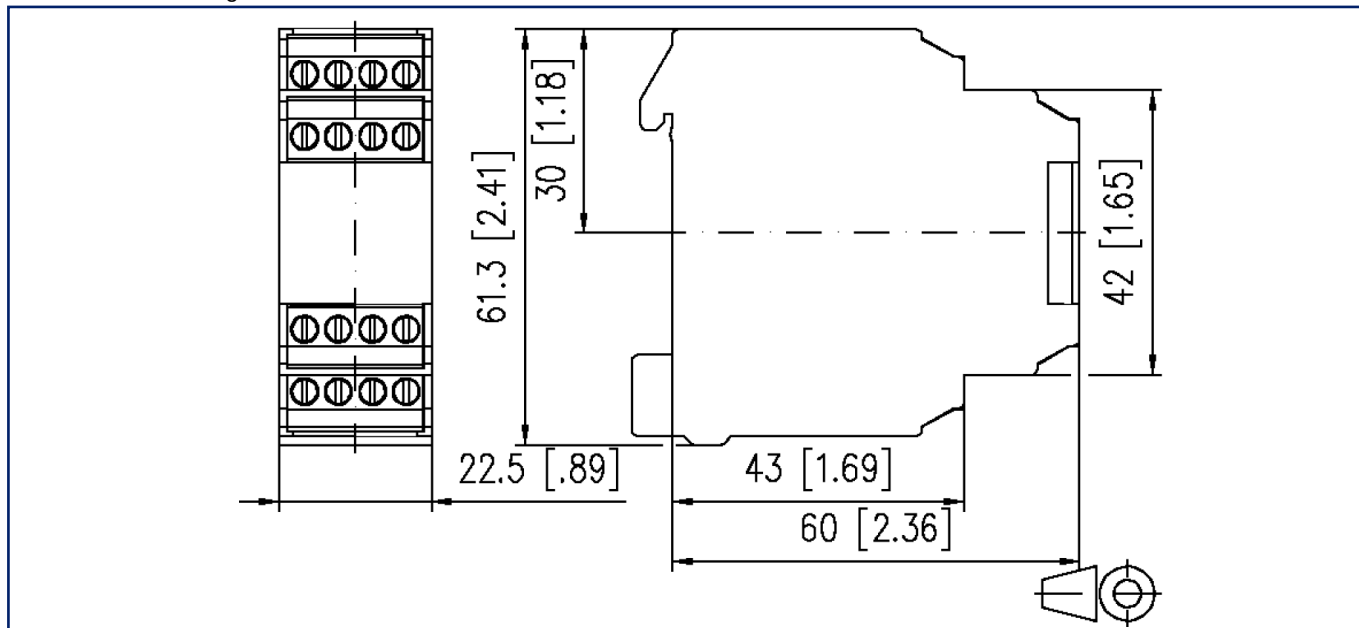

Wiring diagram

1	2	A2	A1
3	4	5	6
7	8	9	10
11	12	14	S

A1 - A2
operating voltage
24 V AC/DC
S
in-/output
11 - 12 - 14
output contact
1 changeover
1 ... 10
inputs




Data sheet
SMM-E16, 24 V AC/DC

Page 6/6

P/N
11051813
EAN **4250184122388**
2026/09/23
Version: K

Illustrations

Circuit diagram

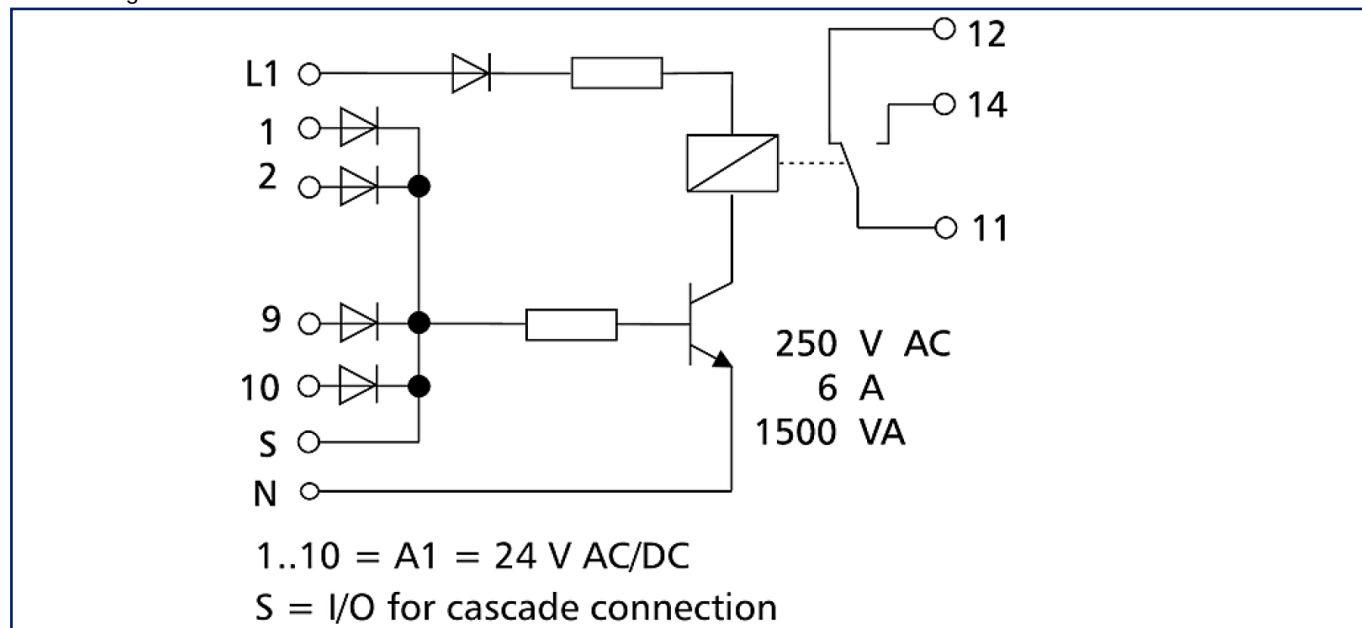

Circuit diagram

