
Data sheet


PC board insert M12, D-coded, 4-pole, green, Tape & Reel

P/N
MMT060A115-G2
EAN 4251394619101
2026/08/03
Version: T


Illustrations

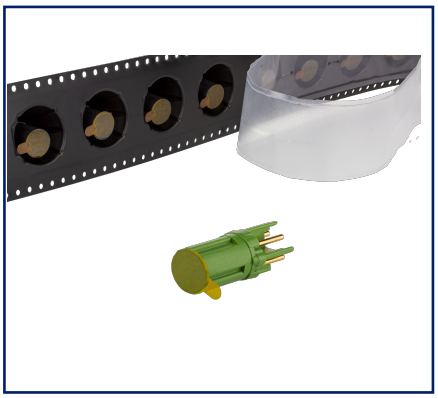

Dimensional drawing

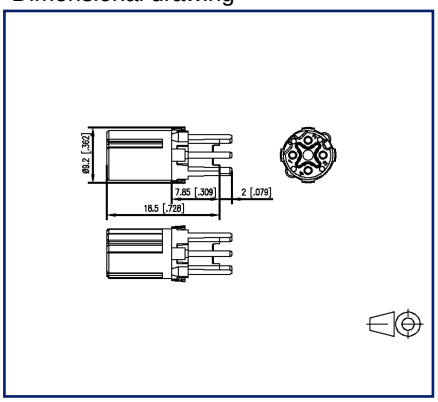

Drill pattern

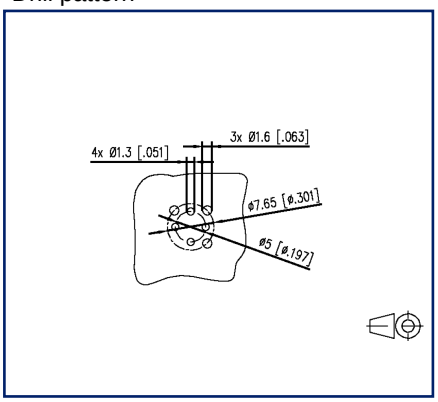

See enlarged drawings at the end of document

Product specification

- PC board insert M12
- Cat.5
- 4-pole, D-coded
- suitable for 10/100 MBit
- THR solderable
- Top entry
- Contact carriers green
- Tape & Reel packaging
- suitable for applications in the railway industry according to data sheet

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433
Weitere Dokumentation siehe / additional documentation see / documentation supplémentaire voir www.metz-connect.com

Data sheet

PC board insert M12, D-coded, 4-pole, green, Tape & Reel

P/N MMT060A115-G2

EAN 4251394619101

2026/08/03

Version: T

Technical Data

General Data	
Dimensions	
Dimension (D x H)	Ø 9.2 mm x 20.5 mm
Dimension (D x H)	0.362 in. x 0.807 in.
Ports	Single port
Coding	D-coded
Electrical characteristics	
Rated voltage	250 V
Effective value of the withstand voltage	1.4 kV
Current carrying capacity at 40 °C	4 A
Insulation resistance	min. 100 MOhm
Overvoltage category	II
Degree of pollution	2
Mechanical data	
Material	
Material - Contact	CuZnPb
Contact surface	Ni + Au
Color	green
Life - Number of mating cycles	>= 100
Protection category	IP65, IP67 when plugged in
Particulate ingress	IP6X when plugged in
Liquid ingress/immersion	IPX5, IPX7 when plugged in
Climatic properties	
Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F
Approvals	
Approval mark UL/CSA	E305050

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Data sheet
PC board insert M12, D-coded, 4-pole, green, Tape & Reel

P/N
MMT060A115-G2
EAN 4251394619101
2026/08/03
Version: T

Technical Data

Standards/Regulations	
Railway applications	
Insulating body	PA UL 94 V0 complies with HL1-HL3; R26 according to EN 45545-2:2020+A1:2023
Flammable mass (g)	0.62 g
Classifications	
ETIM 7.0	EC002637
ETIM 8.0	EC002637
ETIM 9.0	EC002637
ETIM 10.0	EC002637
Packaging	
Type of packaging	160 pc(s) / Tape & Reel
Application note	

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!


Data sheet

PC board insert M12, D-coded, 4-pole, green, Tape & Reel


P/N
MMT060A115-G2
EAN 4251394619101
2026/08/03
Version: T

Illustrations

Dimensional drawing

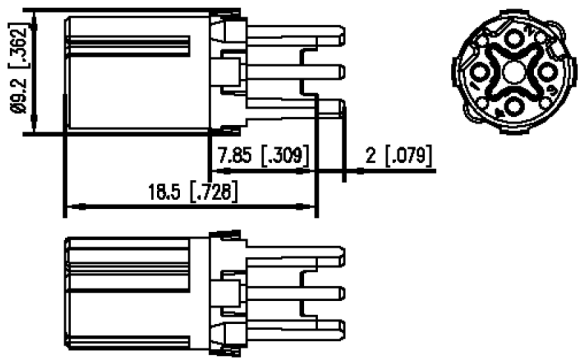

Drill pattern

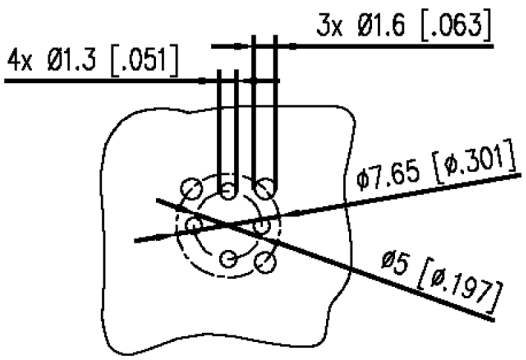


© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

PC board insert M12, D-coded, 4-pole, green, Tape & Reel

P/N
MMT060A115-G2
EAN 4251394619101
2026/08/03
Version: T

Illustrations

Snap-in geometry

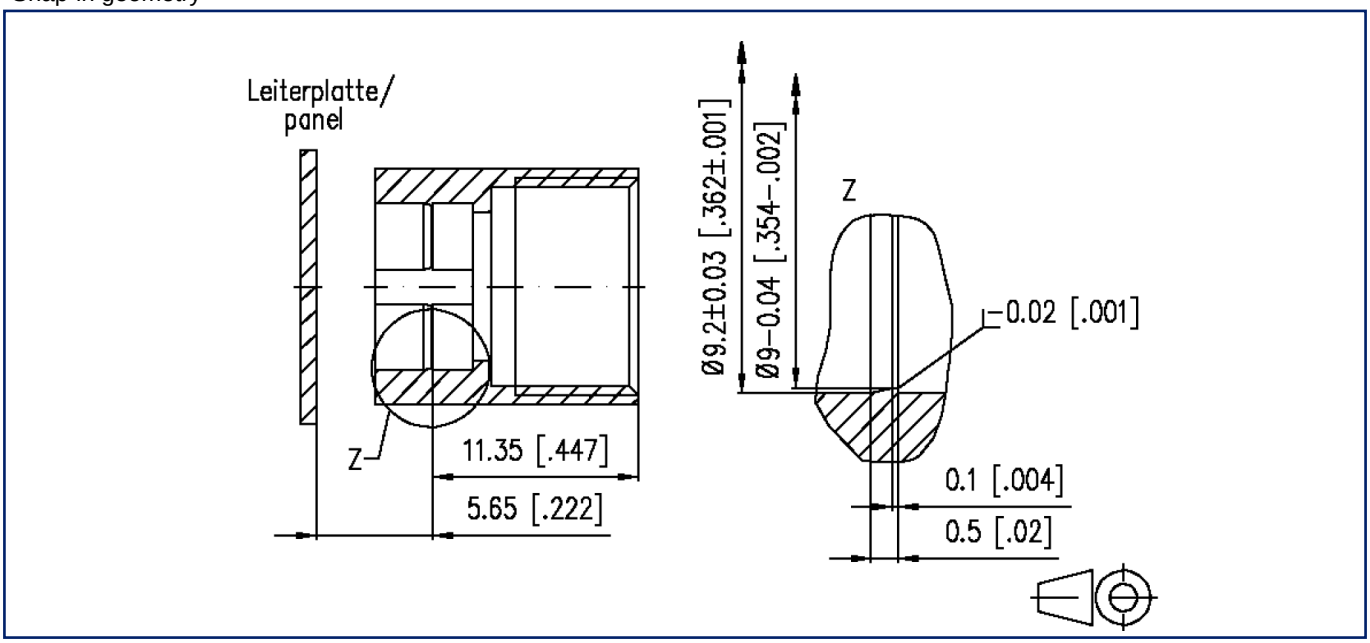

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!