

Data sheet

DCCS2 C6_A PL23

Page 1/6


P/N
130D2CL2XXXE

2025/09/17
Version: AG

Illustrations



Dimensional drawing

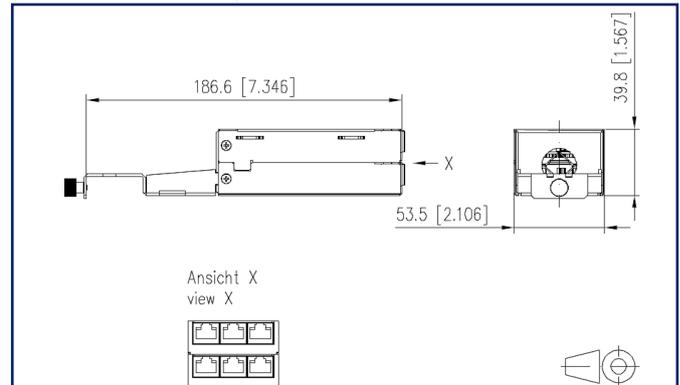

See enlarged drawings at the end of document

Product specification

- DCCS2 class E_A Permanent Link consisting of two 6-port RJ45 subassemblies connected to a 24-pair installation cable AWG23/1
- Cat.6_A component test according to ISO/IEC 11801, DIN EN 50173-1, ANSI/TIA-568.2-D and IEC 60603-7-51, GHMT certified
- compliance with class E_A up to 500 MHz according to ISO/IEC 11801, DIN EN 50173-1, GHMT certified
- tested: components up to 600 MHz, link up to 800 MHz
- Suitable for 10Gbit Ethernet (IEEE 802.3an), remote powering (PoE, PoE plus and UPoE) and HDBaseT. Fulfils the requirements of class E_A with a maximum transmission length of 60 m instead of 90 m in the permanent link.
- Alien Next optimized, shielded jacks
- the locking levers of patch cords connected to DCCS2 subassemblies show upwards and are easy to handle at any time
- solid and refined assembly housing
- shield tap for installation cable separate from strain relief
- cable diameter less than 19 mm
- short links with less than 5 m are also available
- delivery with serial number and 6 Permanent Link measurement reports
- mounting version: DCCS2
- available in prefabricated, customer specific lengths - replace the xxx in the part number by the length - examples: 050 = 5.0 m; 100 = 10.0 m; 200 = 20.0 m; 800 = 80.0 m
- maximum length 80 m

Data sheet
DCCS2 C6_A PL23

Technical Data

General Data

Fields of application	data center
Design	subassembly / assembly / module / unit
Mounting style	DCCS
Shielding	shielded
Transmission technology	Copper
Cable Type	S/FTP
Number of twisting elements	24
Twisting element	Pair
Wiring	T568A
Color	metallike
Dimensions	
Dimension (L x W x H)	186.6 mm x 53.5 mm x 39.8 mm
Dimension (L x W x H)	7.346 in. x 2.106 in. x 1.567 in.
Maximum length	80 m
Maximum length	262.46 ft

Transmission characteristics

Category (ISO)	6 _A
Class (ISO/IEC)	E _A
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
HDBaseT	yes
Transmission rate up to 1 GBit (Fast Ethernet)	IEEE 802.3ab

Connections/interfaces

Connector technology interface 1	LSA terminal block
Connector technology interface 2	RJ45-jack
Number of ports interface 2	6
Number of ports interface 2 equipped	6
Number of positions/contacts interface 2	8P/8C

Data sheet
DCCS2 C6_A PL23

Page 3/6

P/N
130D2CL2XXXE

2025/09/17
Version: AG

Technical Data

Connections/interfaces

Termination data, solid wire (min. - max.)

AWG 23/1

Core diameter (min. - max.)

Core diameter (conductor with insulation)

0.4 mm - 0.63 mm

Core diameter (conductor with insulation)

0.016 in. - 0.025 in.

Cable sheath diameter (min. - max.)

Cable sheath diameter

13.2

Cable sheath diameter

0.52

Mechanical data

strain relief

cable tie

Bending radius without load

55 mm

Bending radius without load

2.165 in.

Bending radius with load

110 mm

Bending radius with load

4.331 in.

Materials and material properties

Material - Assembly housing

sheet steel

Material - Assembly housing finish

Zn (zinc)

Flame retardancy

yes

Halogen free

yes

RoHS

compliant

Standards/Regulations

Generic cabling systems

General requirements

ANSI/TIA-568-C.2

Test for vertical flame propagation for a single insulated wire or cable

IEC 60332-3-24

Classifications

ETIM 7.0

EC002697

ETIM 8.0

EC002697



Data sheet
DCCS2 C6_A PL23

Page 4/6

P/N
130D2CL2XXE2025/09/17
Version: AG**Technical Data****Packing details**

Type of packaging 1 pc(s) / Ring or drum

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet
DCCS2 C6_A PL23

Page 5/6

P/N
130D2CL2XXE

2025/09/17
Version: AG

Accessories

P/N	Designation
130D2B1B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B1G-E	DCCS2 BGT 19 inch 1RU subrack light gray
130D2B2B-E	DCCS2 BGT 19 inches 1RU subrack black
130D2B2G-E	DCCS2 BGT 19 inches 1RU subrack light gray



Illustrations

Dimensional drawing

