

Data sheet

IT02308HMNU002 ETHERNET

Page 1/5


P/N
AIT0230899-002

2025/11/03
Version: O


Illustrations



Dimensional drawing as an example

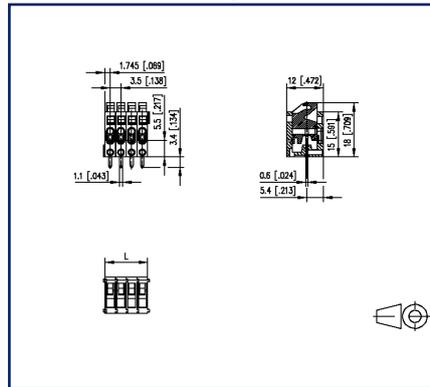

Drill pattern as an example

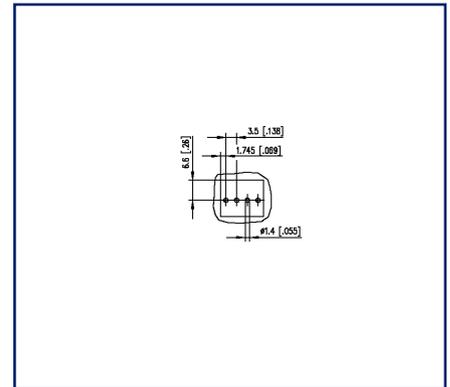

See enlarged drawings at the end of document

Product specification

- ethernet-compatible insulation displacement connector, solderable
- suitable for up to 10 GBit Ethernet (IEEE 802.3an)
- compliance with class E_A according to ISO/IEC 11801, DIN EN 50173-1
- suitable for Power over Ethernet/Remote Powering (PoE, PoE plus, UPoE and 4PPoE)
- centerline 3.50 mm, direction of connection 90°
- modular
- color coding for conductor colors according to T568 (brown/white/blue/white/orange/white/green/white)

Data sheet
IT02308HMNU002 ETHERNET

Technical Data

General Data

Solder pin length	3.5 mm		
pole size	8		
Insulating material class	CTI 600		
clearance/creepage dist.	2.3 mm		
Protection category	IP20		
wire insulation	1.8 mm		
Rated current	2.5 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	4 kV	4 kV	4 kV

Terminal data

rat.wiring solid AWGmax	0.2 mm ² - 0.34 mm ² / AWG 24 - AWG 22		
rat.wiring strand.AWGmax	0.2 mm ² - 0.34 mm ² / AWG 24 - AWG 22		

Approvals

 V / A / AWG	150 / 2.5 / 24 - 22		
approval UL - File No.	E121004		
	130 V / 5 A / T60		

Transmission characteristics

Data transmission according to IEEE 802.3ab	1 GBit/s up to 100 m
Data transmission according to IEEE 802.3an	10 GBit/s up to 100 m
Power transmission	PoE, IEEE 802.3af, 15,4 W PoE+, IEEE 802.3at, 30 W 4PPoE, IEEE802.3bt, 90 W

Material

insulating material	PA66
flammability class	V0
contact material	CuSn
Contact surface	Sn
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12

Data sheet
IT02308HMNU002 ETHERNET

Page 3/5

P/N
AIT0230899-0022025/11/03
Version: O

Technical Data

Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13
-----------------------------	-------------------------------

Climatic Data

upper limit temperature	105 °C
-------------------------	--------

lower limit temperature	-40 °C
-------------------------	--------

general

Tolerance	ISO 2768 -mH
-----------	--------------

Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s
---------------	-------------------------------------

Note PCB compensation	The PCB compensation is necessary to achieve the specified data transmission specifications
-----------------------	---


Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Illustrations

Dimensional drawing as an example

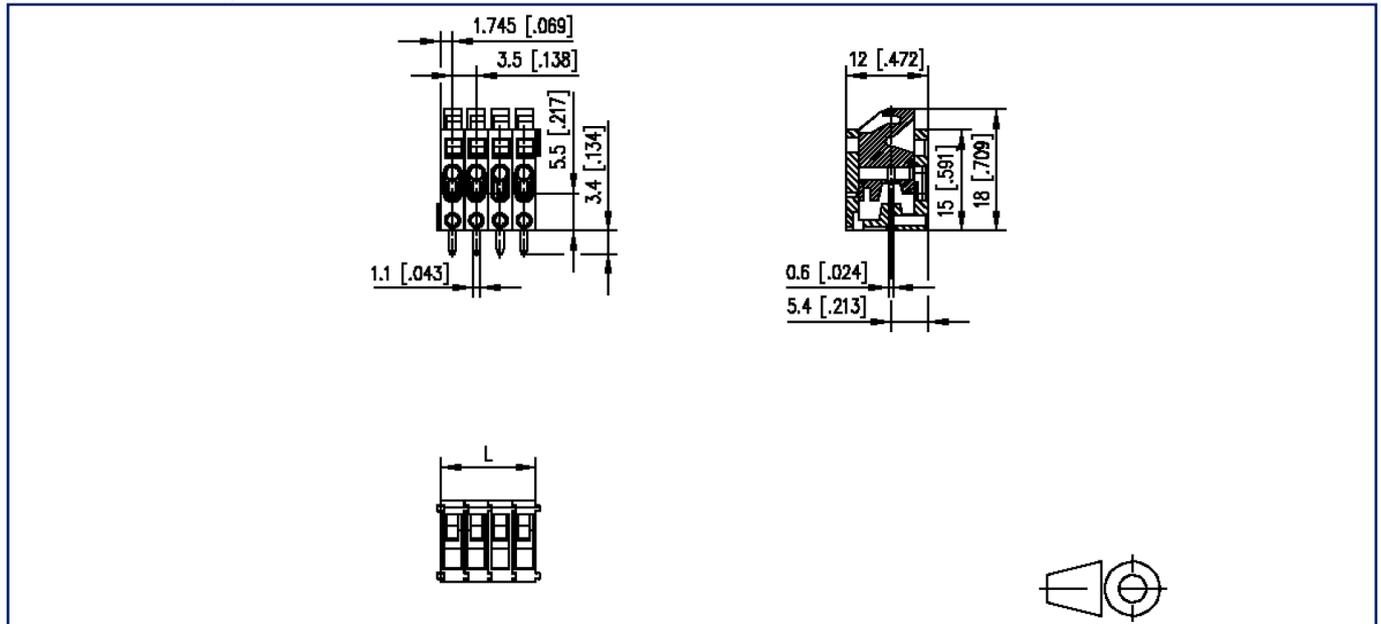


$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 \text{ mm} [0.138]$



Illustrations

Drill pattern as an example

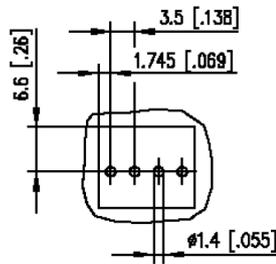

Application example

