

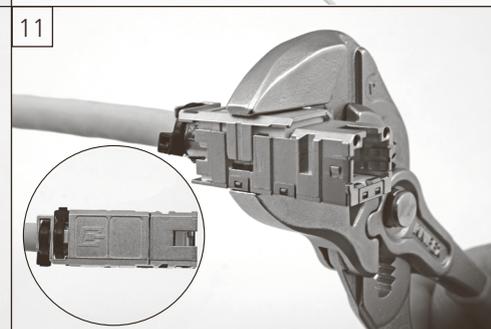
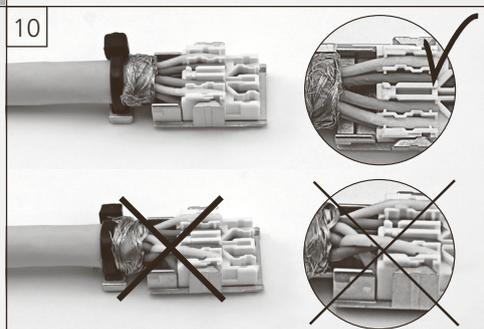
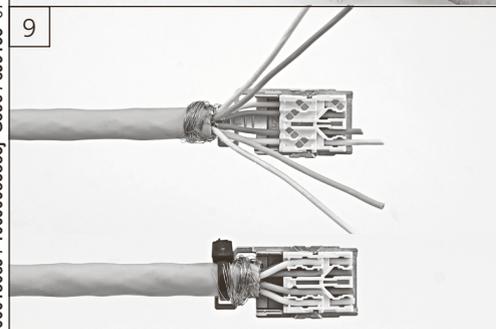
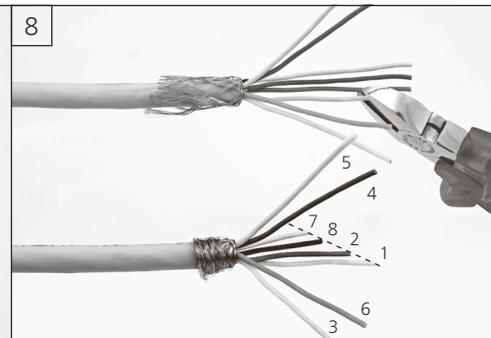
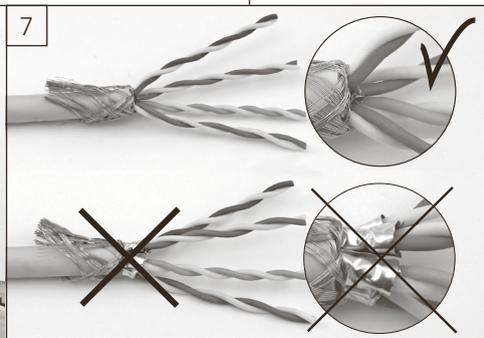
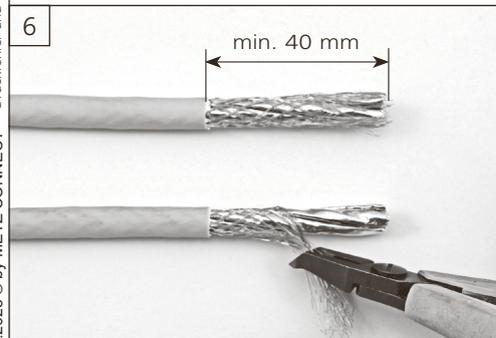
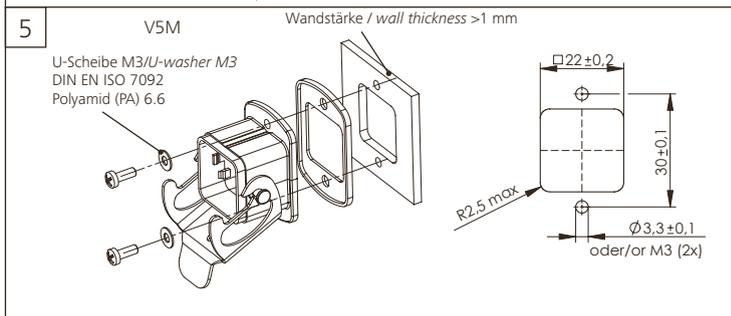
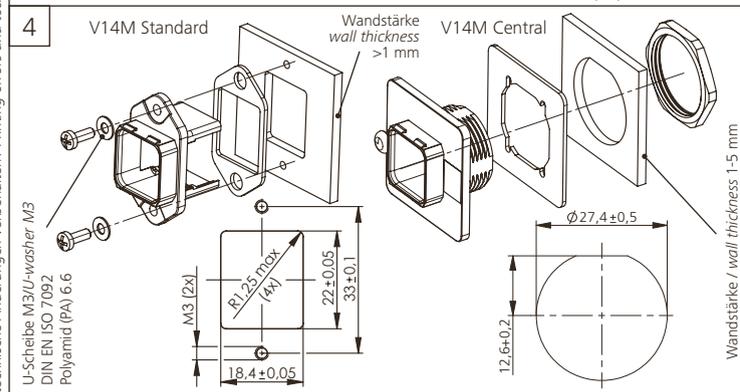
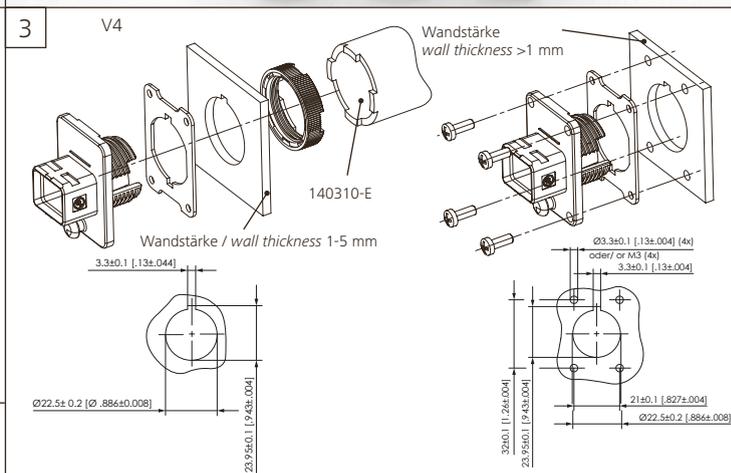
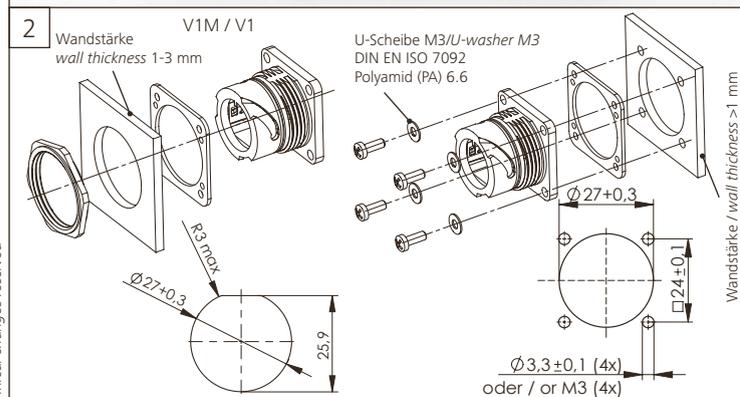
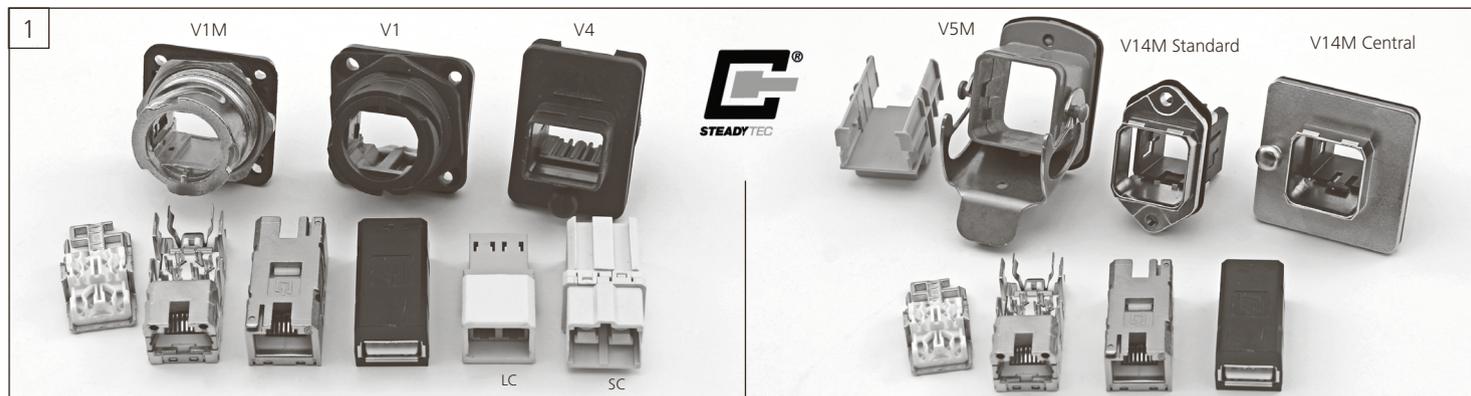


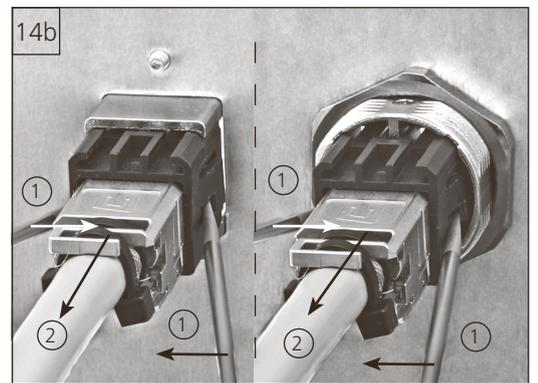
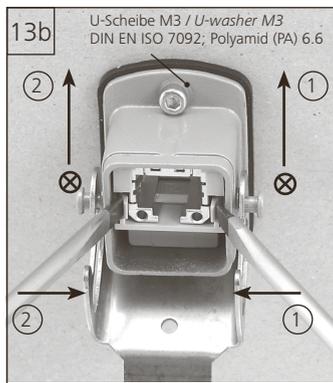
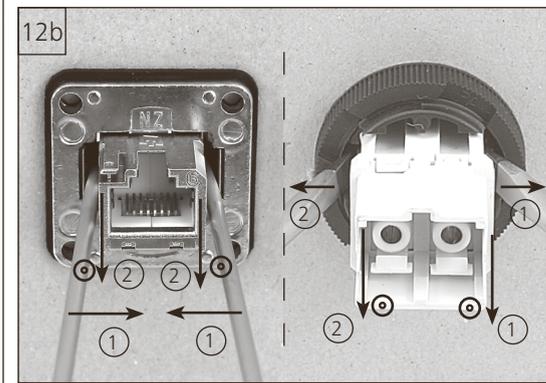


**E-DAT Industry RJ45 field jack insert / RJ45 coupler insert/ USB A coupler insert
OpDAT Industry SC-RJ/ 2SC adaptor insert MM / SC-RJ/2SC adaptor insert SM
OpDAT Industry LC-D adaptor insert MM / LC-D adaptor insert SM**

Montagehinweis / Mounting informations / Références de montage / Indicaciones de montaje / Informazioni per il montaggio

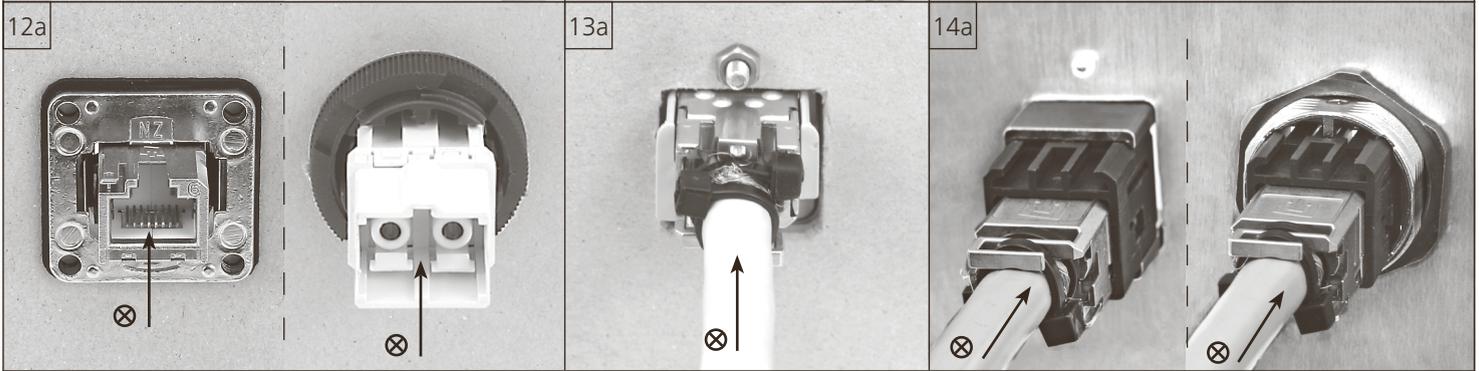

100018089 / 10000085885 | G396 / 899155 07.2025 © by METZ CONNECT • Druckfehler und technische Änderungen vorbehalten / Printing errors and technical changes reserved

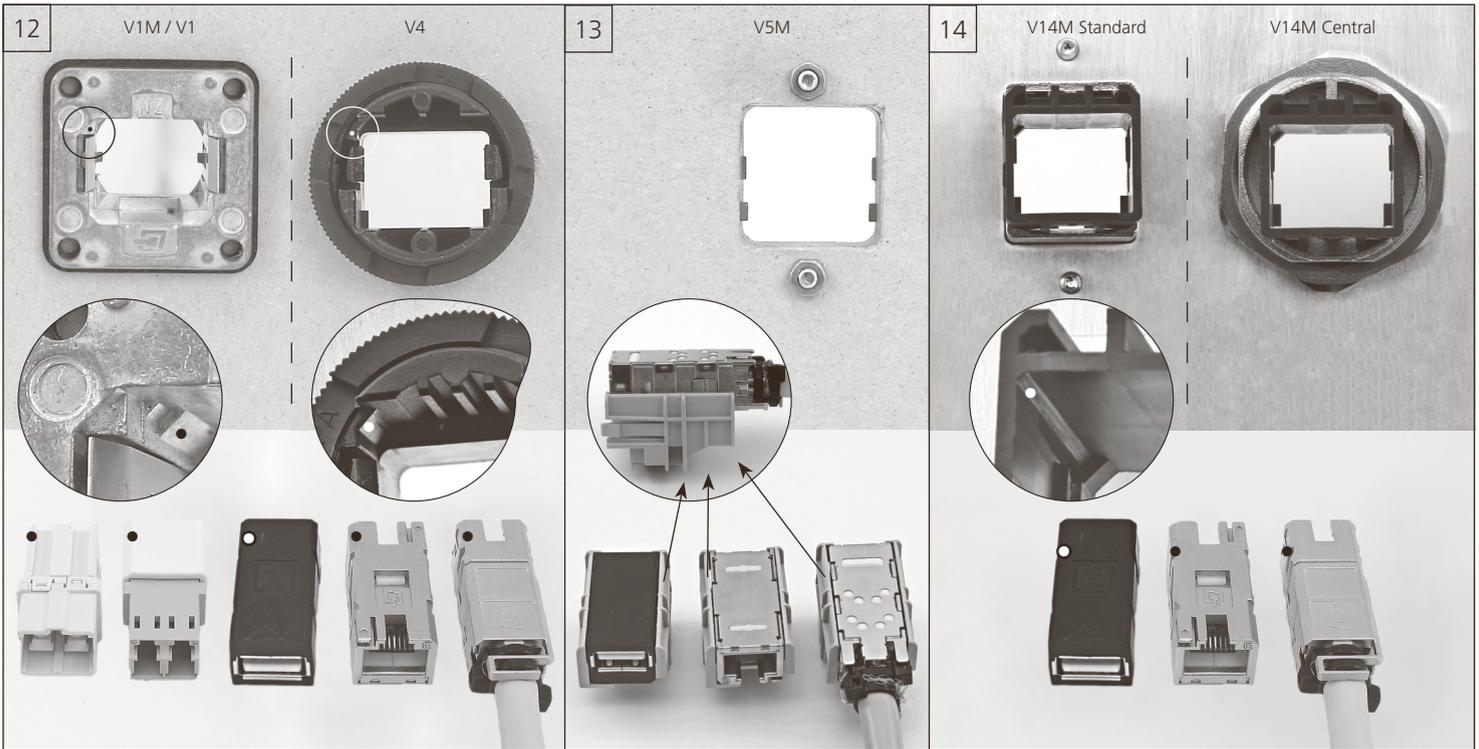

Anschluss / Connection				Anwendung / Application				
RJ45 PIN Nr./No.	Farbcode Colour code T568		DIN 47100	Industrial	10BT/ 100BT	1 Gigabit 10 Gigabit Ethernet	Token Ring ISDN/So	Upo/ TEL
	A	B						
1	WH-GN	WH-OG	WH	YE	•	•		
2	GN	OG	BN	OG	•	•		
3	WH-OG	WH-GN	GN	WH			•	
4	BU	BU	YE	-			•	•
5	WH-BU	WH-BU	GY	-			•	•
6	OG	GN	PK	BU	•	•	•	
7	WH-BN	WH-BN	BU	-				
8	BN	BN	RD	-				

Weitere Demontageschritte nach Montageanleitung / further demounting steps according to the mounting instructions