Product information – OpDAT REGpro
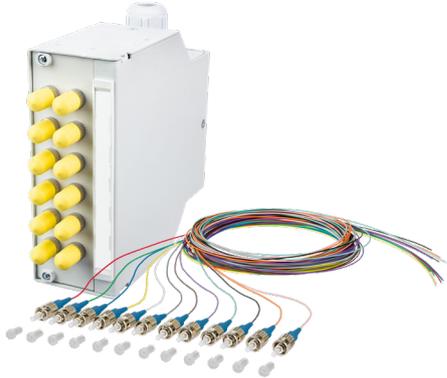

Product description

> Compact distributor housing for TH35 DIN rail systems
> Prepared and mounted for immediate use
> Several variants for various uses:
   - installation of pre-terminated cables
   - splicing of installation cables on pigtails
   - connection of installation cables
> Available in 2 sizes:
   - OpDAT REGpro suitable for up to 12 connectors or splice connections
   - OpDAT REGpro24 suitable for up to 24 connectors or splice connections

> Removable splice tray for up to 12 splices, equipped with crimp or shrink splice holders
> Cable insertion from above or below, straight or inclined, suitable for M20 strain relief
> Front area with identification strips
> Various mounting positions on the DIN rail system possible
> Housing made from sheet steel, powder coated (RAL 7035 light grey)

P | Cabling

Variants

DESCRIPTION	VIK VARIANT	SPLICE VARIANT

	VIK VARIANT	SPLICE VARIANT
Properties	› Housing with mounted front plate and adapters › Prepared for installation of pre-terminated installation cables (VIK) › suitable for VIKs with universal and breakout cables with a maximum of 12 fibers › suitable for VIKs with mini-breakout cables with a maximum of 24 fibers	› Housing with mounted front plate, adapters and splice trays › Pigtails already built in and stripped › suitable for splicing installation cables › faster installation through splicing preprepared pigtails
Accessories	› DIN rail holder › Identification label	› DIN rail holder › Identification label › Cable gland with strain relief* › Cable connectors

*2x for OpDAT REGpro24 housing

Variants

DESCRIPTION	BLISTER VARIANT	CONNECT VARIANT

Properties

BLISTER VARIANT
- Housing with mounted front plate, adapters and splice trays
- Pigtails arranged in blister
- Suitable for splicing installation cables
- simple handling through single pigtails

CONNECT VARIANT
- housing with mounted blind plate and spice tray
- suitable for connecting a maximum of 2 installation cables
- compact connection of installation cables e.g. for extending a connection or displacing distribution cabinets

Accessories

BLISTER VARIANT
- DIN rail holder
- Identification label
- Cable gland with strain relief*
- Cable connectors

CONNECT VARIANT
- DIN rail holder
- Identification label
- 2x cable gland with strain relief
- Cable connectors

*2x for OpDAT REGpro24 housing

Adapters, maximum stocking

ADAPTER TYPE	OPDAT REGPRO	OPDAT REGPRO 24
SC-Simplex	max. 12	-
SC-Duplex	max. 6	-
LC-Duplex	max. 6	-
LC-Quad	-	max. 6
E2000-Simplex	max. 12	-
ST-Simplex	max. 12	-
ST-Duplex	max. 6	-

These recommendations do not apply to the Connect variant, as it does not contain adapters.

Dimensional drawing

OpDAT REGpro
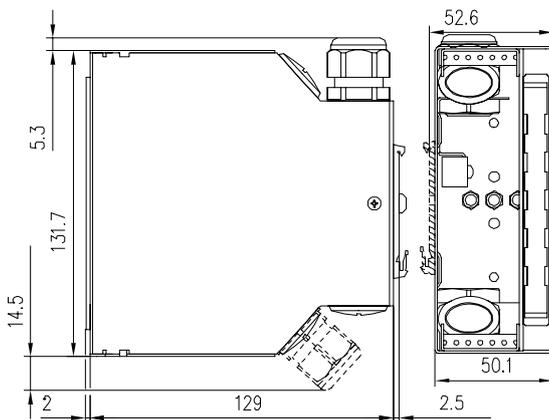
OpDAT REGpro 24

Ordering information

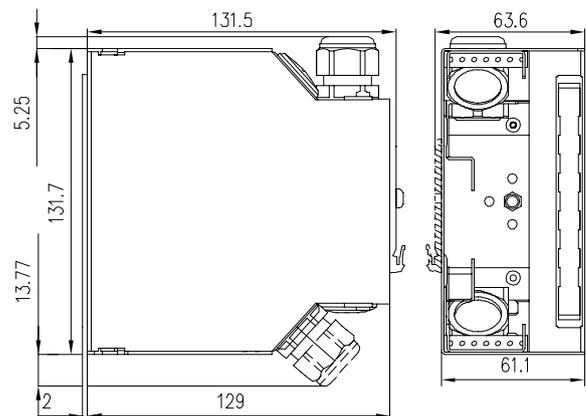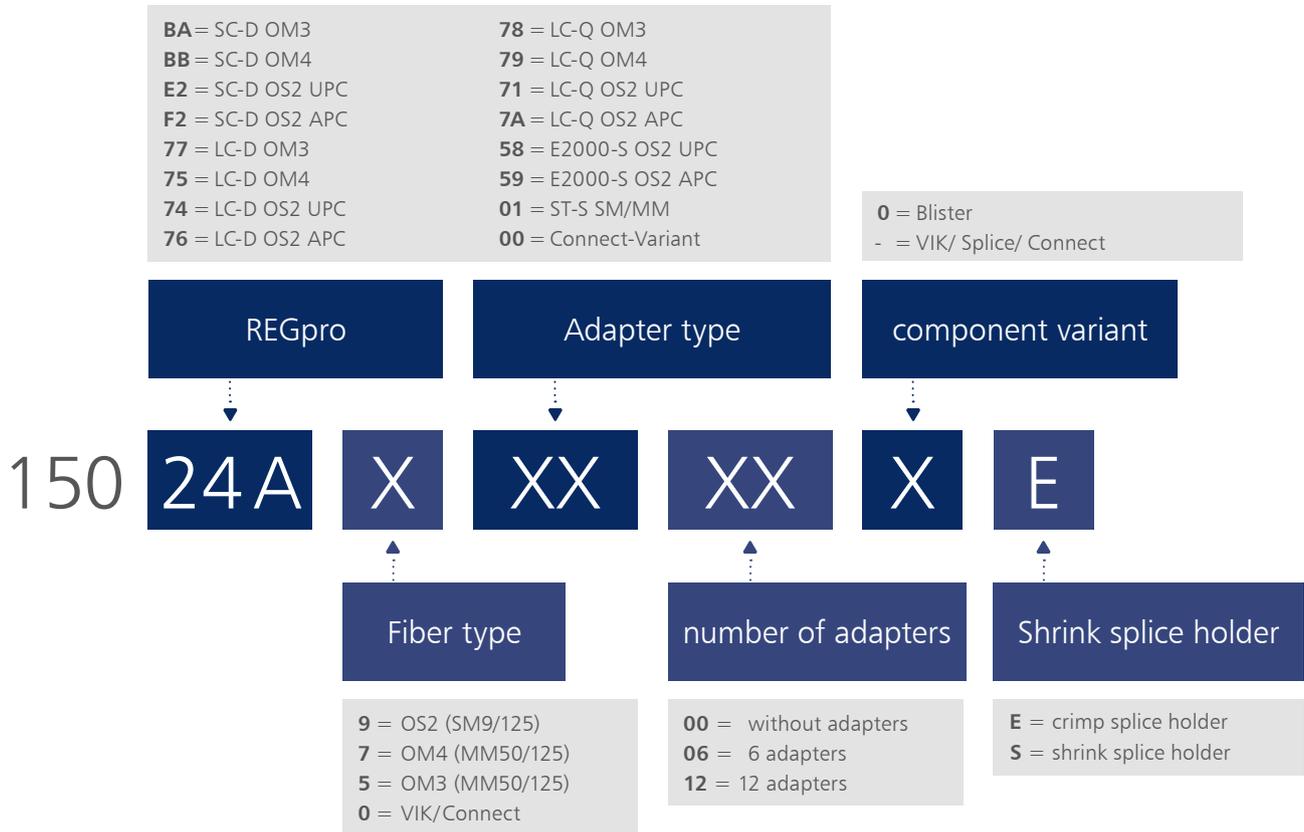| FIBER TYPE	ADAPTER TYPE	ADAPTER COLOR	NUMBER OF ADAPTERS	HOUSING TYPE	P/N
			VIK VARIANT		
OM3	SC-D		6	OpDAT REGpro	15024A0BA06-E
	LC-D	aqua	6	OpDAT REGpro	15024A07706-E
	LC-Q		6	OpDAT REGpro24	15024A07806-E
OM4	SC-D		6	OpDAT REGpro	15024A0BB06-E
	LC-D	heather violet	6	OpDAT REGpro	15024A07506-E
	LC-Q		6	OpDAT REGpro24	15024A07906-E
OS2	SC-D UPC		6	OpDAT REGpro	15024A0E206-E
	LC-D UPC	blue	6	OpDAT REGpro	15024A07406-E
	LC-Q UPC		6	OpDAT REGpro24	15024A07106-E
	SC-D APC		6	OpDAT REGpro	15024A0F206-E
	LC-D APC		6	OpDAT REGpro	15024A07606-E
	LC-Q APC	green	6	OpDAT REGpro24	15024A07A06-E
	E2000-S APC		12	OpDAT REGpro	15024A05912-E
SM+MM	ST-S	metal	12	OpDAT REGpro	15024A00112-E
			SPLICE VARIANT		
OM3	SC-D		6	OpDAT REGpro	15024A5BA06-E
	LC-D	aqua	6	OpDAT REGpro	15024A57706-E
	LC-Q		6	OpDAT REGpro24	15024A57806-E
	ST-S	metal	12	OpDAT REGpro	15024A50112-E
OM4	SC-D		6	OpDAT REGpro	15024A7BB06-E
	LC-D	heather violet	6	OpDAT REGpro	15024A77506-E
	LC-Q		6	OpDAT REGpro24	15024A77906-E
	ST-S	metal	12	OpDAT REGpro	15024A70112-E
OS2	SC-D UPC		6	OpDAT REGpro	15024A9E206-E
	LC-D UPC	blue	6	OpDAT REGpro	15024A97406-E
	LC-Q UPC		6	OpDAT REGpro24	15024A97106-E
	ST-S UPC	metal	12	OpDAT REGpro	15024A90112-E
	SC-D APC		6	OpDAT REGpro	15024A9F206-E
	LC-D APC		6	OpDAT REGpro	15024A97606-E
	LC-Q APC	green	6	OpDAT REGpro24	15024A97A06-E
	E2000-S APC		12	OpDAT REGpro	15024A95912-E

Ordering information

FIBER TYPE	ADAPTER TYPE	ADAPTER COLOR	NUMBER OF ADAPTERS	HOUSING TYPE	P/N
		BLISTER VARIANT			
OM3	ST-S	metal	12	OpDAT REGpro	15024A501120E
	LC-D UPC	blue	6	OpDAT REGpro	15024A974060E
OS2	STS-UPC	metal	12	OpDAT REGpro	15024A901120E
	LC-D APC	green	6	OpDAT REGpro	15024A976060E
		CONNECT VARIANT			
–	–	–	–	OpDAT REGpro	15024A00000-E
–	–	–	–	OpDAT REGpro24	15024A00000-E24

Ordering information

BA = SC-D OM3	**78** = LC-Q OM3
BB = SC-D OM4	**79** = LC-Q OM4
E2 = SC-D OS2 UPC	**71** = LC-Q OS2 UPC
F2 = SC-D OS2 APC	**7A** = LC-Q OS2 APC
77 = LC-D OM3	**58** = E2000-S OS2 UPC
75 = LC-D OM4	**59** = E2000-S OS2 APC
74 = LC-D OS2 UPC	**01** = ST-S SM/MM
76 = LC-D OS2 APC	**00** = Connect-Variant

0 = Blister
- = VIK/ Splice/ Connect

REGpro   **Adapter type**   **component variant**

150 | 24A | X | XX | XX | X | E

Fiber type

9 = OS2 (SM9/125)
7 = OM4 (MM50/125)
5 = OM3 (MM50/125)
0 = VIK/Connect

number of adapters

00 = without adapters
06 = 6 adapters
12 = 12 adapters

Shrink splice holder

E = crimp splice holder
S = shrink splice holder

Further combinations possible on request!

METZ CONNECT

We realize ideas

METZ CONNECT GmbH

Im Tal 2
78176 Blumberg
Germany

Phone +49 7702 533-0
Fax +49 7702 533-189

info@metz-connect.com
www.metz-connect.com

METZ CONNECT USA Inc.

200 Tornillo Way
Tinton Falls, NJ 07712
USA
Phone +1-732-389-1300
Fax +1-732-389-9066

METZ CONNECT France SAS

28, Rue Schweighaeuser
67000 Strasbourg
France
Phone +33 38 86 170 73
Fax +33 38 86 194 73

METZ CONNECT AUSTRIA GmbH

c/o German chamber of commerce
in Austria

Schwarzenbergplatz 5, Top 3/1
1030 Vienna
Austria
Phone +43 1 227 12 64
Fax +43 1 227 12 66

METZ CONNECT Zhongshan Ltd.

Ping Chang Road
Ping Pu Industrial Park
Sanxiang Town
Zhongshan City, 528 463
Guangdong Province
China
Phone +86 760 86365 055
Fax +86 760 86365 050

METZ CONNECT Asia Pacific Ltd.

Suite 1803, 18/F
Chinachem Hollywood Centre,
1 Hollywood Road, Central
Hong Kong
Phone +852 26 027 300
Fax +852 27 257 522