

Data sheet

M12 jack, D-coded, IP67, Cat.5, Ø 4-6 mm, field assembly, straight

Page 1/6

P/N
MMF891A115

EAN 4251394672779


2025/06/05

Version: L


Illustrations



Dimensional drawing

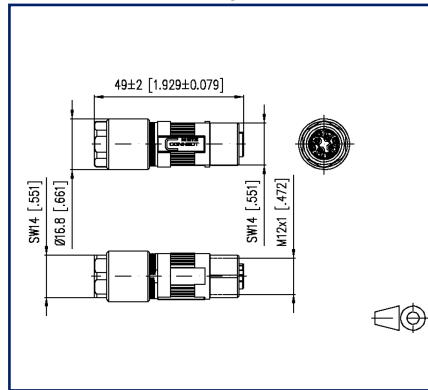

Wiring diagram

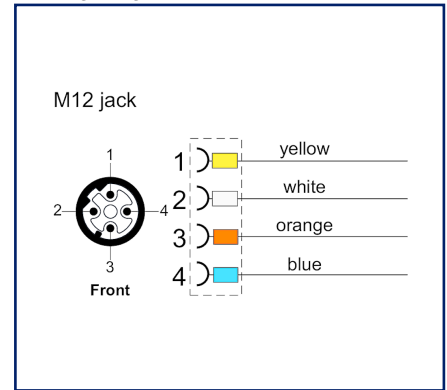

See enlarged drawings at the end of document

Product specification

- 4-pole jack for field assembly Cat.5
- M12 connector following to DIN EN 61076-2-101:2012
- suitable for 100 MBit Fast Ethernet as per IEEE 802.3an
- AWG 26/1 to 22/1, AWG 26/7 to 22/7 can be connected
- solid copper wire diameter 0.41 to 0.64 mm
- stranded copper wire diameter 0.48 to 0.76 mm
- wire diameter with isolation up to 1.6 mm
- cable jacket from 4.0 to 6.0 mm
- jack consists of only two parts
- easy assembly without special tools
- industry-compatible zinc die-cast housing
- suitable for applications in the railway industry according to data sheet

Data sheet

M12 jack, D-coded, IP67, Cat.5, Ø 4-6 mm, field assembly, straight

P/N
MMF891A115

EAN 4251394672779

2025/06/05

Version: L

Technical Data

General Data

Electromagnetic measurement according to MICE	E2
Design	Jack
Shielding	shielded
Transmission technology	Copper
Dimensions	
Dimension (L x W x H)	49 mm x 16.8 mm x 16.8 mm
Dimension (L x W x H)	1.929 in. x 0.661 in. x 0.661 in.
Field assembly ability	yes
Labeling option	on housing

Transmission characteristics

Category (ISO)	5e
Category (TIA)	5e

Connections/interfaces

Connector technology interface 1	IDC-connection
Connector technology interface 2	M12-jack
Coding interface 2	D-coded
Number of ports interface 2	1
Number of ports interface 2 equipped	1
Number of positions/contacts interface 1	4
Number of positions/contacts interface 2	4
Termination data, solid wire (min. - max.)	
Conductor cross section, solid wire	AWG 26/1 - AWG 22/1
Conductor cross section, solid wire	0.128 mm ² - 0.324 mm ²
Conductor diameter, solid wire (bare copper)	0.409 mm - 0.643 mm
Conductor diameter, solid wire (bare copper)	0.016 in. - 0.025 in.



Data sheet

M12 jack, D-coded, IP67, Cat.5, Ø 4-6 mm, field assembly, straight

P/N
MMF891A115

EAN 4251394672779

2025/06/05

Version: L

Technical Data

Connections/interfaces

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire	AWG 26/7 - AWG 22/7
Conductor cross section, stranded wire	0.141 mm ² - 0.355 mm ²
Conductor diameter, stranded wire (bare copper)	0.483 mm - 0.762 mm
Conductor diameter, stranded wire (bare copper)	0.019 in. - 0.03 in.
Aderdurchmesser (min.-max.)	
Core diameter (conductor with insulation)	0.85 mm - 1.6 mm
Core diameter (conductor with insulation)	0.033 in. - 0.063 in.
Cable sheath diameter (min. - max.)	
Cable sheath diameter	4 mm - 6 mm
Cable sheath diameter	0.236 in. - 0.382 in.
Cable access/outlet	straight M12

Electrical characteristics

Current carrying capacity at 40 °C	max. 4 A
Rated voltage	48 V AC / 60 V DC
Note for contact resistance	plug / jack
Contact resistance	max. 5 mOhm
Insulation resistance	min. 100 MOhm

Mechanical data

Mounting method	screwable
Insertion and withdrawal force	10 N 15 N
Life - Number of mating cycles	min. 100

Materials and material properties

Material - Housing	GD-Zn
Material - Contact	CuZnPb (brass)
Material - Contact finish	Ni + Au (nickel-gold)
Material - Contact carriers	PA UL94 V0
Material - Shield	CuSn
Material - Shield finish	Sn
Material - Stuffer cap	PA UL94-V0

Data sheet

**M12 jack, D-coded, IP67, Cat.5, Ø 4-6 mm,
field assembly, straight**

P/N
MMF891A115

EAN 4251394672779

2025/06/05

Version: L

Technical Data

Materials and material properties

Material - Finish	Ni (nickel)
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Note for Temperature - Operating	plug / jack
Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F
Protection category	IP67 when plugged in
Overvoltage category	II
Degree of pollution	3

Approvals

UL listed (file no.)		DUXR.E178484
----------------------	--	--------------

Standards/Regulations

Connectors for electronic equipment	
circular connector	M12 connector following to DIN EN 61076-2-101:2012
Railway applications	
Electronic equipment used on rolling stock	following to DIN EN 50155
Fire protection on railway vehicles	following to DIN EN 45545-2
Contact holder	Thermoplastic HL3 according to R22 EN 45545-2
Stuffer cap	Thermoplastic HL3 according to R22 EN 45545-2
Sealings	Elastomer
Shock and vibration	DIN EN 50155:2018-05, DIN EN 61373:2011-04 Class 1 Category B
Salt spray	DIN EN 50155:2018-05, (DIN EN 60068-2-11:2000-02/ 48h test KA)

Data sheet

Page 5/6

**M12 jack, D-coded, IP67, Cat.5, Ø 4-6 mm,
field assembly, straight****P/N
MMF891A115****EAN 4251394672779**

2025/06/05

Version: L

Technical Data

Classifications

ETIM 7.0	EC002635
ETIM 8.0	EC002635
ETIM 9.0	EC002635

Packing details

Type of packaging	10 pc(s) / box
-------------------	----------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 6/6

**M12 jack, D-coded, IP67, Cat.5, Ø 4-6 mm,
field assembly, straight**

P/N
MMF891A115


EAN 4251394672779

2025/06/05

Version: L

Illustrations

Dimensional drawing

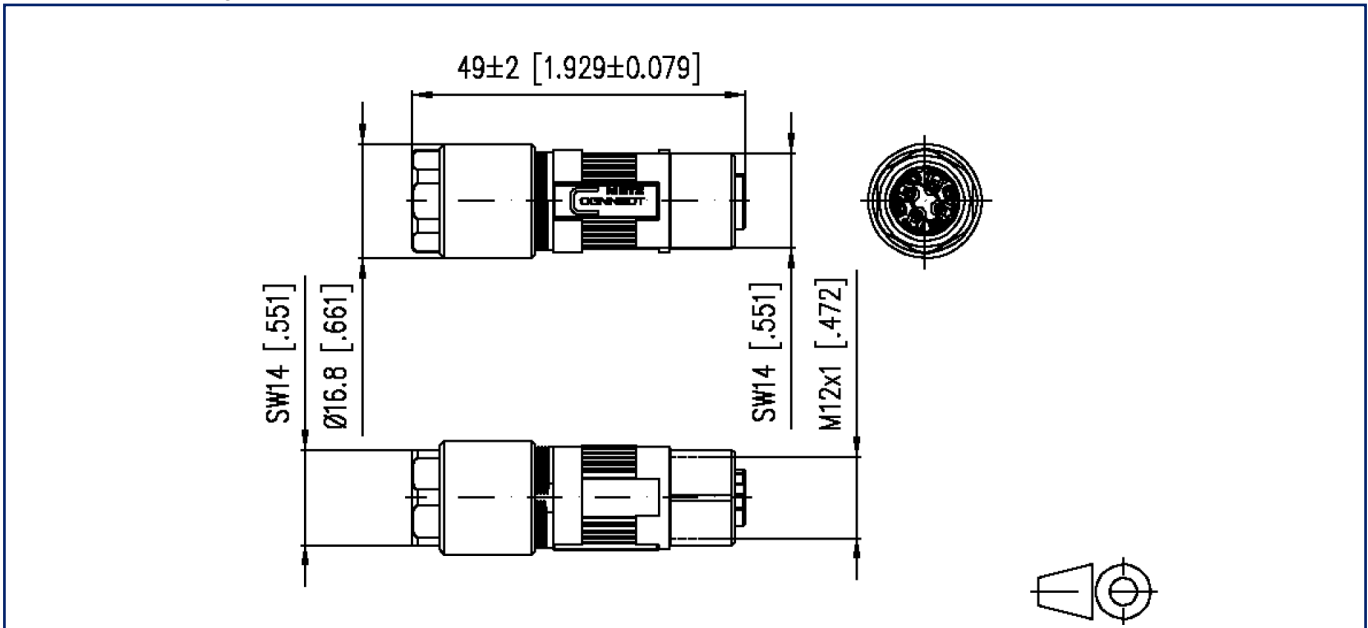

Wiring diagram

