

# Data sheet

## OpDAT fix<sup>2</sup> patch panel Prefab 6xLC-D OM3 black

Page 1/5

P/N

1504507706-C

EAN 4251394683935

2025/10/09

Version: C

### Illustrations



Dimensional drawing



See enlarged drawings at the end of document

### Product specification

- 19-inch, 1RU patch panel for fixed installation
- Equipped with 6xLC-D couplers
- Offset coupling arrangement for easy handling
- Front panel with labelling field
- Front panel powder-coated in black RAL 9005
- Tool-free opening of the cover
- Several possibilities for cable entry on the back: 6xM20; 2xM25; 2xPrefab installation cut-outs
- Prepared for the installation of pre-assembled cables



**Data sheet**  
**OpDAT fix<sup>2</sup> patch panel Prefab**  
**6xLC-D OM3 black**

**Technical Data**

**General Data**

|                         |   |
|-------------------------|---|
| Fields of application   | data center<br>office areas<br>structured building cabling<br>interior<br>Distributed building services |
| Features variant        | Prefab  |
| Design                  | Fixed installation  |
| Mounting style          | screwable   |
| Transmission technology | Fiber optic   |
| Port numbering          | yes   |
| Color housing           | metal   |
| Color front plate       | RAL 9005 - black  |
| Adapter color           | aqua  |
| Dimensions              |   |
| Dimension (L x W x H)   | 259 mm x 483 mm x 44 mm   |
| Dimension (L x W x H)   | 10.197 in. x 19.016 in. x 1.732 in.   |
| Inches                  | 19 inches   |
| Height unit             | 1RU   |
| Installation depth      | 256 mm  |
| Installation depth      | 10.079 in.  |
| Fiber class             | OM3   |
| Mode type of the fiber  | Multimode   |
| Shape                   | PC (Physical Contact)   |
| Labeling option         | label strip / labeling strip  |

**Connections/interfaces**

|                                 |   |
|---------------------------------|---|
| Adapter type                    | LC-D  |
| Adapter interface outside       | LC-D  |
| Adapter interface inside        | LC-D  |
| Number of adapters              | 6   |
| Number of breakouts front panel | 12  |
| Number of blind                 | 6   |
| Cable access/outlet             | several possibilities for cable entry on the back |

Data sheet  
**OpDAT fix<sup>2</sup> patch panel Prefab  
 6xLC-D OM3 black**

**Technical Data**

**Mechanical data**

|               |                   |
|---------------|-------------------|
| Cut-out       | SC-S/LC-D/E2000-S |
| strain relief | optional          |

**Materials and material properties**

|                               |  |
|-------------------------------|--|
| Material - Housing            | sheet steel                                    |
| Material - Housing finish     | Zn (zinc)                                      |
| Material - Front cover        | sheet steel                                    |
| Material - Front cover finish | powder-coated                                  |
| Material - Sleeve             | ceramic, slotted                               |
| Material - Coupler housing    | Plastics                                       |
| RoHS                          | compliant, certificate see further information |
| REACH                         | compliant, 7439-92-1 – lead                    |

**Standards/Regulations**

|                         |                   |
|-------------------------|-------------------|
| FO connector interfaces | LC - IEC 61754-20 |
|-------------------------|-------------------|

**Classifications**

|           |          |
|-----------|----------|
| ETIM 8.0  | EC001130 |
| ETIM 9.0  | EC001130 |
| ETIM 10.0 | EC001130 |

**Packing details**

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet  
**OpDAT fix<sup>2</sup> patch panel Prefab  
6xLC-D OM3 black**

Page 4/5

P/N  
**1504507706-C**  
**EAN 4251394683935**  
2025/10/09  
Version: C

## Accessories

| P/N          | Designation                                      |
|--------------|--|
| 150240M20Z-E | OpDAT strain relief M20                          |
| 150240M25Z-E | OpDAT strain relief M25                          |
| 150240Z20Z-E | OpDAT strain relief for M20                      |
| 1509010000-E | OpDAT splice tray for 12 splices, unequipped     |
| 1509010001-E | OpDAT splice tray with 1 crimp protection cover  |
| 1509010002-E | OpDAT splice tray with 2 splice protection cover |
| 15090200-E   | OpDAT cover for splice tray                      |




Data sheet  
**OpDAT fix<sup>2</sup> patch panel Prefab  
 6xLC-D OM3 black**

Page 5/5

P/N  
 1504507706-C  
 EAN 4251394683935  
 2025/10/09  
 Version: C

**Illustrations**

Dimensional drawing

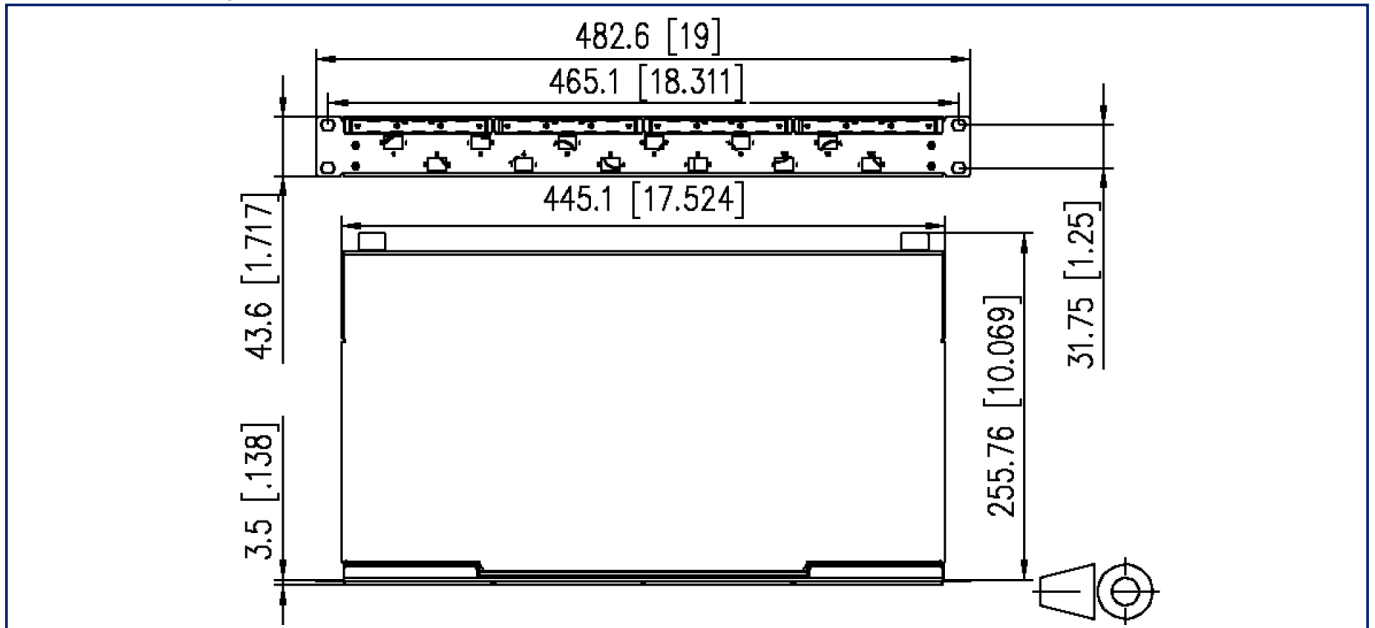

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

