

Data sheet

Page 1/8


**M12 Industrial Ethernet cable, D-coded, 1.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N
142M1D25010
EAN 4251122178870
2025/07/09
Version: C


Illustrations



Dimensional drawing

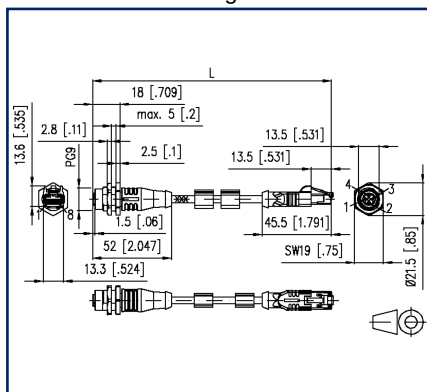

Dimensional drawing

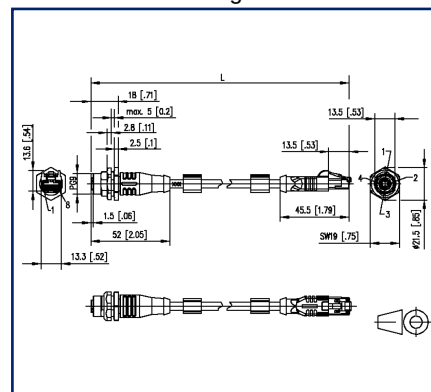

See enlarged drawings at the end of document

Product specification

Shielded PUR cable for safe and industrial data transmission in automation and fieldbus technology. The cable is CMX-verified and complies with Cat5e (electrical properties based on EN50288-2-1). Materials and constructional design allow increased mechanical stress (abrasion, bending, vibrations etc.) of the cable. Use in drag chains with up to 3 million bending cycles is possible without risk. Special properties: flame retardant, seawater resistant, recyclable, LABS-free, RoHS compliant, acid and alkali resistant, ozone resistant, UV resistant, hydrolysis resistant, drag chain compatible, halogen free, oil resistant, high flexibility, microbe resistant, UN ECER118, PROFINET Type C.

- Standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m.
- Other cable lengths on request.



Data sheet

Page 2/8

**M12 Industrial Ethernet cable, D-coded, 1.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N

142M1D25010

EAN 4251122178870

2025/07/09

Version: C

Technical Data

General Data	
Design	Ethernet-Connection cable
Shielding	shielded
Transmission technology	Copper
Cable Type	SF/FTP
Number of twisting elements	2
Twisting element	Pair
Wiring	Profinet
Color coding fiber/ wire(s)	yellow, white, orange, blue
Color	green
Dimensions	
Dimension - Interface 1 (L x W x H)	52 mm x 21.5 mm x 21.5 mm
Dimension - Interface 1 (L x W x H)	2.047 in. x 0.846 in. x 0.846 in.
Dimension - Interface 2 (L x W x H)	45.5 mm x 13.3 mm x 13.6 mm
Dimension - Interface 2 (L x W x H)	1.791 in. x 0.524 in. x 0.535 in.
Cable length (m)	1 m
Cable length (ft)	3.28 ft
Labeling option	identification label carrier

Transmission characteristics	
Category (ISO)	5e
Transmission rate up to 100 MBit (Fast Ethernet)	IEEE 802.3u

Connections/interfaces	
Connector technology interface 1	M12-jack
Connector technology interface 2	RJ45 plug
Coding interface 1	D-coded
Number of positions/contacts interface 1	4
Number of positions/contacts interface 2	8P/4C



Data sheet

Page 3/8

M12 Industrial Ethernet cable, D-coded, 1.0 m, M12 jack straight - RJ45 plug straight, drag chain, PUR

P/N

142M1D25010

EAN 4251122178870

2025/07/09

Version: C

Technical Data

Connections/interfaces

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire	AWG 22/7
--	----------

Conductor diameter, stranded wire (bare copper)	0.75 mm
---	---------

Conductor diameter, stranded wire (bare copper)	0.03 in.
---	----------

Cable sheath diameter (min. - max.)

Cable sheath diameter	6.5 mm
-----------------------	--------

Electrical characteristics

Current carrying capacity	4 A at 40 °C
---------------------------	--------------

Rated voltage	60 V DC
---------------	---------

UL rating (cable)	600 V
-------------------	-------

Insulation resistance	min. 100 MOhm
-----------------------	---------------

Mechanical data

Life - Number of mating cycles	min. 100
--------------------------------	----------

Bending radius without load	min. 49 mm
-----------------------------	------------

Maximum operating bending radius	26 mm
----------------------------------	-------

Maximum installation load	52 mm
---------------------------	-------

Number of alternating bending cycles (mechanical resistance) at:	3 million bending cycles
--	--------------------------

Alternating bending radius	100 mm
----------------------------	--------

velocity	4 m/s
----------	-------

acceleration	4 m/s ²
--------------	--------------------

Shielding braid coverage	85 %
--------------------------	------

Installation method	PROFINET type C
---------------------	-----------------

Materials and material properties

Material - Conductor	Cu (copper)
----------------------	-------------

Material - Conductor Insulation	Polyethylene
---------------------------------	--------------

Material - Cable jacket	PUR
-------------------------	-----

Material - Inner cable jacket	FRNC, with an aluminized film
-------------------------------	-------------------------------

Material - Body interface 1	Plastics
-----------------------------	----------

Material - Body interface 2	Plastics
-----------------------------	----------

Material - Contact interface 1	CuZnPb (brass)
--------------------------------	----------------



Data sheet

Page 4/8

**M12 Industrial Ethernet cable, D-coded, 1.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N

142M1D25010

EAN 4251122178870

2025/07/09

Version: C

Technical Data
Materials and material properties

Material - Contact interface 2	CuZnPb (brass)
Material - Contact finish interface 1	Au (gold)
Material - Contact finish interface 2	Au (gold)
Material - Contact carriers interface 1	Plastics
Material - Contact carriers interface 2	Plastics
Material - Union nut interface 1	CuZnPb (brass)
Material - Union nut finish interface 1	Ni (nickel)
Material - Pair shield	plastic film
Material - Pair shield finish	Al (Aluminium)
Material - Main shield	Cu (copper) braid
Material - Main shield finish	Sn
Flame retardancy	according to IEC 60332-1-2
Halogen free	yes
Oil resistance	yes
drag chain suitable	yes
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Operating °C	-30 °C - 90 °C
Temperature - Operating °F	-22 °F - 194 °F
Particulate ingress interface 1	IP6X when plugged in
Liquid ingress/immersion interface 1	IPX5, IPX7 when plugged in
Particulate ingress interface 2	IP2X when plugged in
Liquid ingress/immersion interface 2	IPX0 when plugged in
Pollution degree interface 1	3
Pollution degree interface 2	1



Data sheet

Page 5/8

M12 Industrial Ethernet cable, D-coded, 1.0 m, M12 jack straight - RJ45 plug straight, drag chain, PUR

P/N

142M1D25010

EAN 4251122178870

2025/07/09

Version: C

Technical Data

Approvals

UL listed (file no.)



DUXR.E178484

Standards/Regulations

Generic cabling systems

General requirements

ISO/IEC 11801-1 | DIN EN 50173-1

Profinet

yes

Connectors for electronic equipment

circular connector

DIN EN 61076-2-101

Multi-element metallic cables used in analogue and digital communication and control

DIN EN 50288-2-1

Common test methods for cables under fire conditions

UN ECE-R 118.01

R118

Test for vertical flame propagation for a single insulated wire or cable

IEC 60332-1-2

Measurement of smoke density of cables burning

DIN EN 61034

Classifications

ETIM 7.0

EC002599

ETIM 8.0

EC002599

ETIM 9.0

EC002599

ETIM 10.0

EC002599

Packing details

Type of packaging

1 pc(s) / plastic bag

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



**M12 Industrial Ethernet cable, D-coded, 1.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N

142M1D25010


EAN 4251122178870

2025/07/09


Version: C

Illustrations

Dimensional drawing

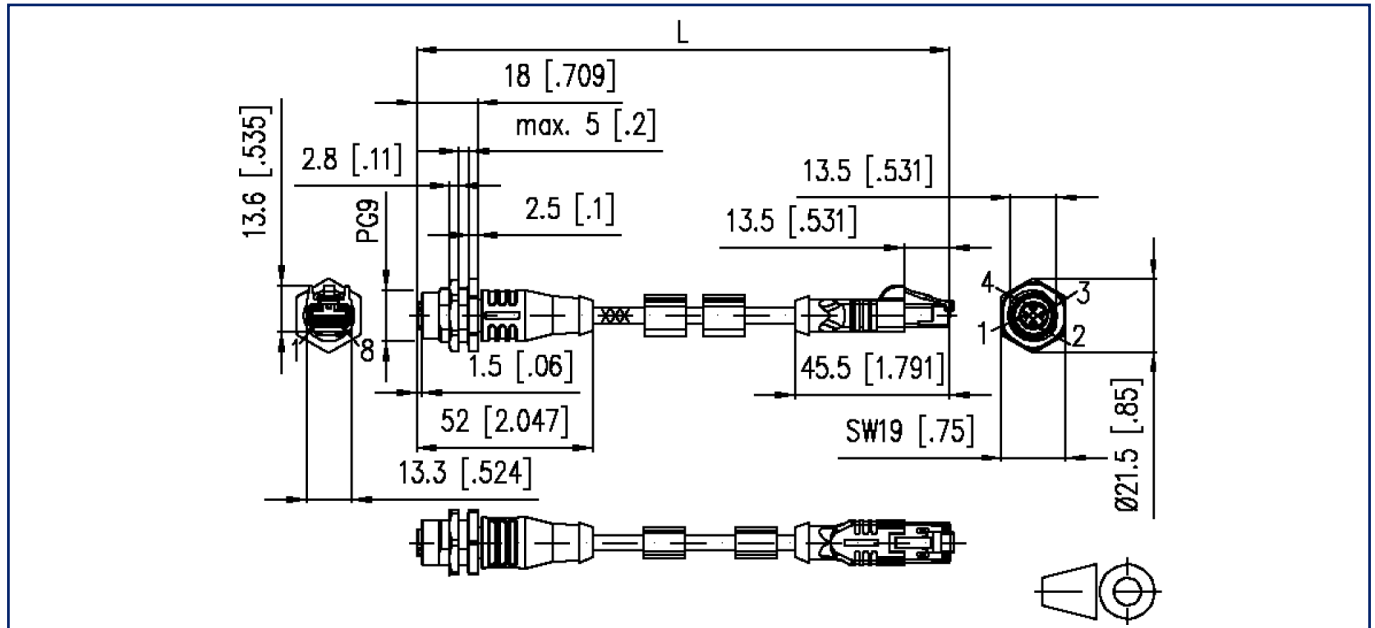

Dimensional drawing

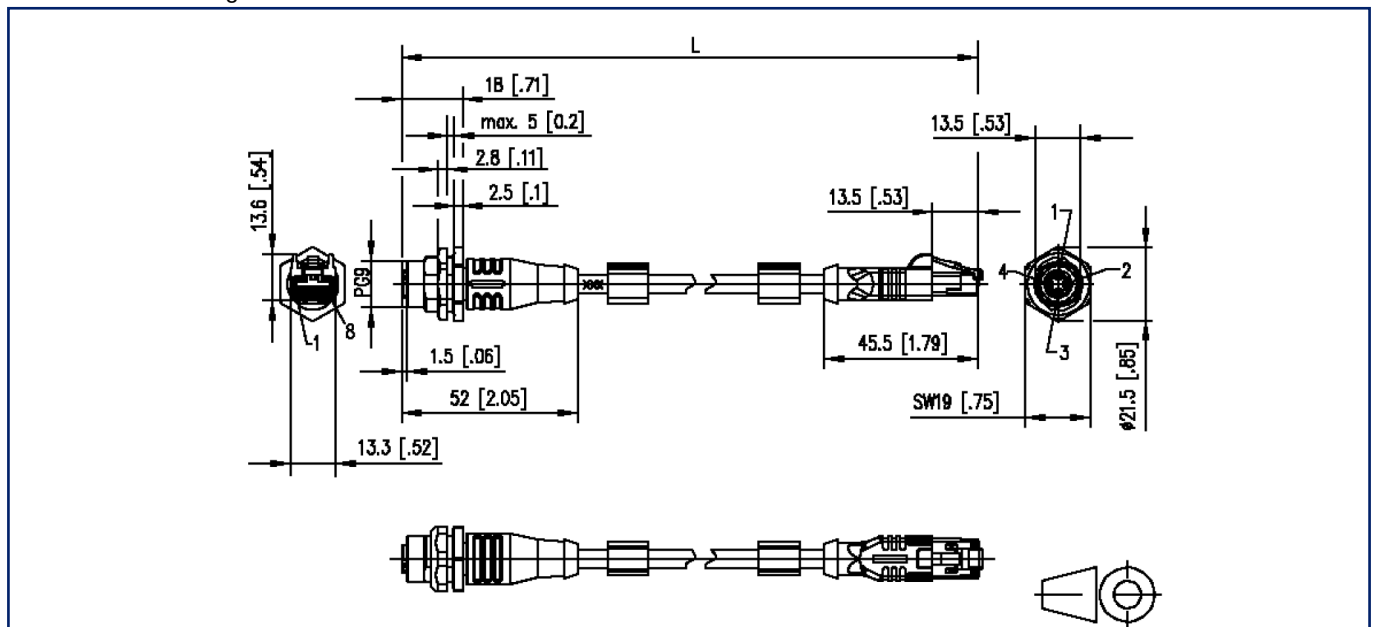

Data sheet

Page 7/8

**M12 Industrial Ethernet cable, D-coded, 1.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N

142M1D25010


EAN 4251122178870

2025/07/09

Version: C



Illustrations

Cut-out

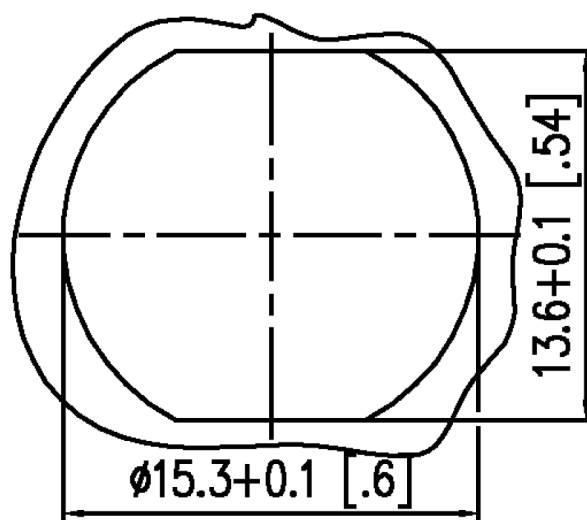


Wiring diagram

M12 jack

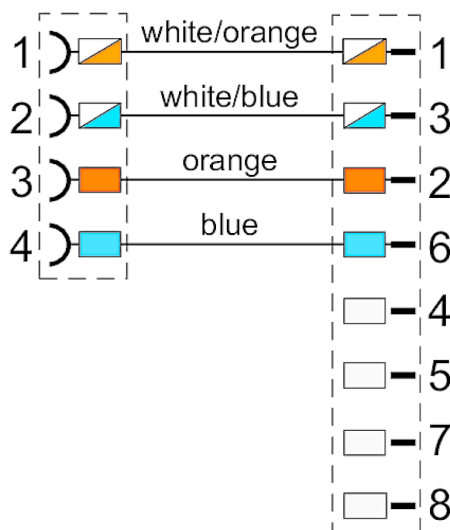

RJ45 plug



Data sheet

Page 8/8

**M12 Industrial Ethernet cable, D-coded, 1.0 m,
M12 jack straight - RJ45 plug straight, drag chain, PUR**

P/N

142M1D25010

EAN 4251122178870

2025/07/09

Version: C

Illustrations

Principle diagram

