# Data sheet

## OpDAT slide$^2$ patch panel Prefab 24xLC-D APC OS2 gray




**P/N 1504607624-E**

**EAN 4251394678047**


2026/10/20

Version: F

## Illustrations

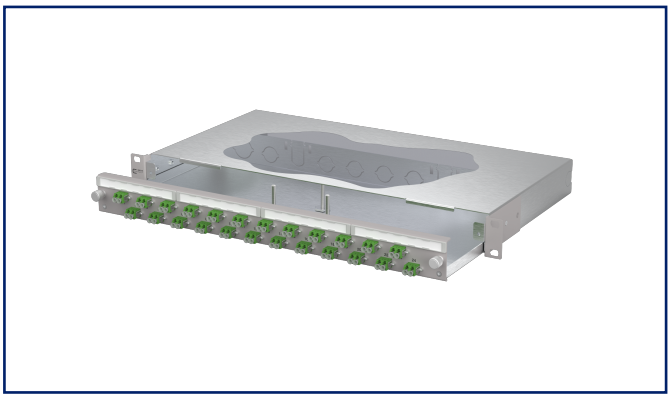

Dimensional drawing

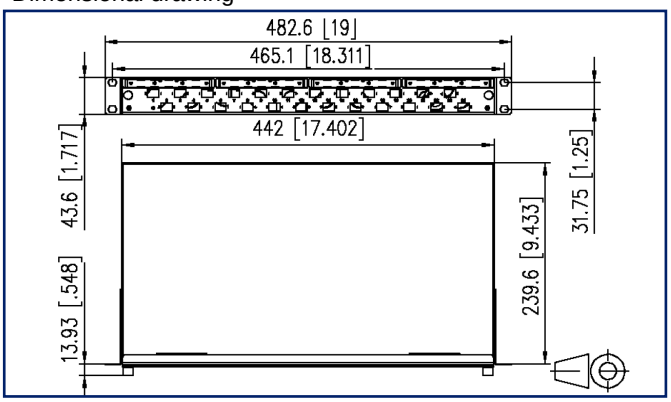


See enlarged drawings at the end of document

## Product specification

- 19-inch, 1RU patch panel with pull-out drawer
- Equipped with 24xLC-D couplers
- Offset coupling arrangement for easy handling
- Tool-free metal bayonet catch for locking the drawer
- Drawer can be tilted and completely removed for easier installation (pull-out stop)
- Depth adjustable by 30 mm
- Front panel with labelling field
- Front panel powder-coated in gray RAL 7035
- Several possibilities for cable entry on the back: 6xM20; 2xM25; 2xPrefab installation cut-outs
- Prepared for the installation of pre-assembled cables

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433 | info@metz-connect.com

# OpDAT slide$^2$ patch panel Prefab 24xLC-D APC OS2 gray

**P/N 1504607624-E**
**EAN 4251394678047**
2026/10/20
Version: F

## Technical Data

### General Data

| | |
|---|---|
| Fields of application | data center<br>office areas<br>structured building cabling<br>interior<br>Distributed building services |
| Features variant | Prefab |
| Design | Eithdrawable |
| Mounting style | screwable |
| Transmission technology | Fiber optic |
| Port numbering | yes |
| Color housing | metal |
| Color front plate | RAL 7035 - light gray |
| Adapter color | green |
| Dimensions | |
| Dimension (L x W x H) | 244 mm x 482 mm x 47 mm |
| Dimension (L x W x H) | 9.606 in. x 18.976 in. x 1.85 in. |
| Inches | 19 inches |
| Height unit | 1RU |
| Installation depth | 240 mm |
| Installation depth | 9.449 in. |
| Fiber class | OS2 |
| Mode type of the fiber | Singlemode |
| Shape | APC (Angled Physical Contact) |
| Labeling option | label strip / labeling strip |

### Connections/interfaces

| | |
|---|---|
| Adapter type | LC-D |
| Adapter interface outside | LC-D |
| Adapter interface inside | LC-D |
| Number of adapters | 24 |
| Number of breakouts front panel | 24 |
| Cable access/outlet | several possibilities for cable entry on the back |

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

# OpDAT slide$^2$ patch panel Prefab 24xLC-D APC OS2 gray

**P/N 1504607624-E**
**EAN 4251394678047**
2026/10/20
Version: F

## Technical Data

| | |
|---|---|
| **Mechanical data** | |
| Cut-out | SC-S/LC-D/E2000-S |
| strain relief | optional |
| **Materials and material properties** | |
| Material - Housing | sheet steel |
| Material - Housing finish | Zn (zinc) |
| Material - Front cover | sheet steel |
| Material - Front cover finish | powder-coated |
| Material - Sleeve | ceramic, slotted |
| Material - Coupler housing | Plastics |
| RoHS | compliant, certificate see further information |
| REACH | compliant, 7439-92-1 – lead |
| **Standards/Regulations** | |
| FO connector interfaces | LC - IEC 61754-20 |
| **Classifications** | |
| ETIM 8.0 | EC001130 |
| ETIM 9.0 | EC001130 |
| ETIM 10.0 | EC001130 |
| **Packing details** | |
| Type of packaging | 1 pc(s) / box |

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

# OpDAT slide$^2$ patch panel Prefab 24xLC-D APC OS2 gray

**P/N 1504607624-E**
**EAN 4251394678047**
2026/10/20
Version: F

## Accessories

| P/N | Designation |
|---|---|
| 150240M20Z-E | OpDAT strain relief M20 |
| 150240M25Z-E | OpDAT strain relief M25 |
| 150240Z20Z-E | OpDAT strain relief for M20 |
| 1509010000-E | OpDAT splice tray for 12 splices, unequipped |
| 1509010000-I | OpDAT splice tray for 12 splices, unequipped (10 pieces) |
| 1509010001-E | OpDAT splice tray with 1 crimp protection cover |
| 1509010002-E | OpDAT splice tray with 2 splice protection cover |
| 15090200-E | OpDAT cover for splice tray |
| 15090200-I | OpDAT cover for splice tray (10 pieces) |


© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

# OpDAT slide$^2$ patch panel Prefab 24xLC-D APC OS2 gray

**P/N 1504607624-E**
**EAN 4251394678047**
2026/10/20
Version: F

## Illustrations

Dimensional drawing

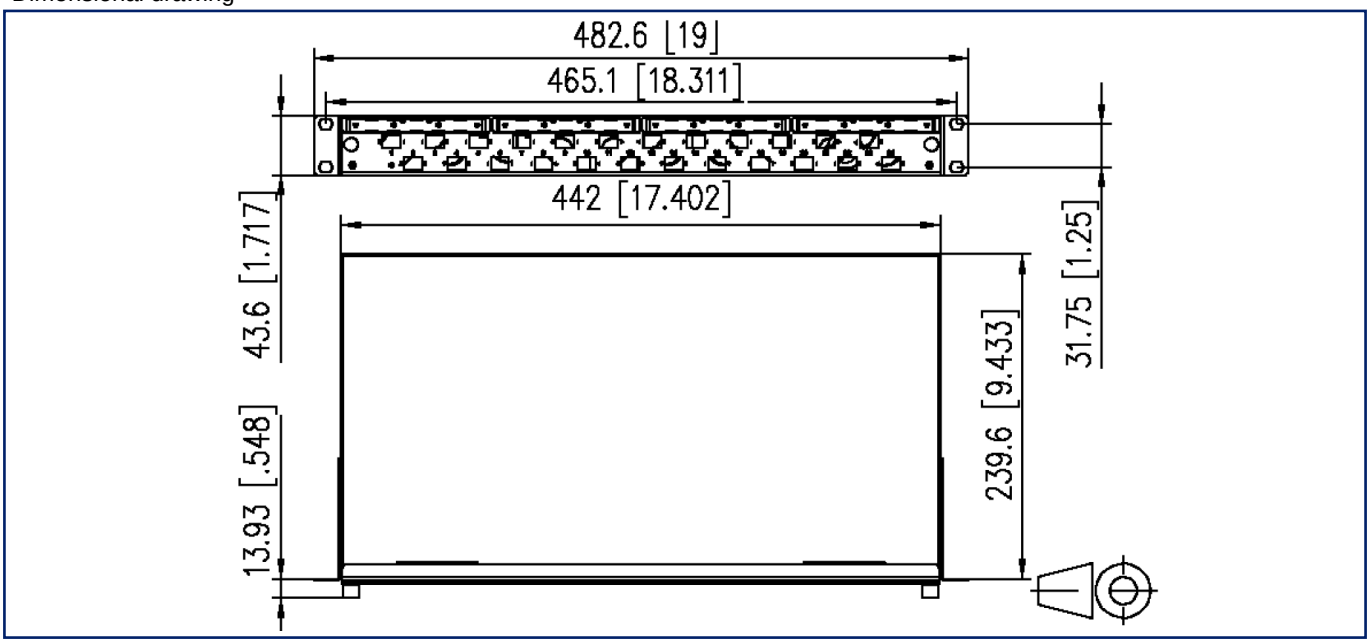


© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!